

INNOMED

ORTHOPEDIC INSTRUMENTS



featuring many **New!** instruments throughout



1.800.548.2362 • WWW.INNOMED.NET

2020 Complete Catalog

Catalog Index

HIP 1 - 25

HIP & KNEE REVISION 26 - 36

KNEE 37 - 52

SHOULDER & ELBOW 53 - 61

SMALL BONE & SPINE 62 - 71

TRAUMA 72 - 78

GENERAL 79 - 83

Anterior Watson Jones Total Hip Arthroplasty System

Instrument system specifically designed for
Direct Anterior approach THR

- 1 Awl - Left
2 Awl - Right

- 3 Lighted Mueller Retractor

- 4 Wide Lighted Retractor

- 5 Narrow Lighted Retractor

- 6 90° Cobra Retractor

- 7 Deep Hohmann Retractor

- 8 Straight Hohmann Retractor

- 9 Femoral Starter Drill with
Zimmer Hall Quick-connect

PRODUCT NO'S:

6300-00 [Complete Set]

Available Individually:

6301-L [Awl - Left]
Overall Length: 12.375" (31,5 cm)

6301-R [Awl - Right]
Overall Length: 12.375" (31,5 cm)

6302-01 [Lighted Mueller Retractor]
Blade Width: 27 mm
Handle Length: 5.5" (14 cm)
Overall Length: 12.75" (32,4 cm)

6303-01 [Wide Lighted Retractor]
Blade Width: 40 mm
Blade Tip Length: 17 mm
Overall Length: 12.75" (32,4 cm)

6304-01 [Narrow Lighted Retractor]
Blade Width: 26 mm
Blade Tip Length: 23 mm
Overall Length: 16.5" (41,9 cm)

6305 [90° Cobra Retractor]
Blade at Widest: 37 mm
Blade Depth: 7.5" (19,1 cm)
Blade Prong: 18 mm Long X 10 mm Wide
Overall Length: 12.5" (31,8 cm)
Handle Length: 9.5" (24,1 cm)

6306 [Deep Hohmann Retractor]
Blade Width: 17 mm
Prong Length: 34 mm
Overall Length: 9.25" (23,5 cm)

6307 [Straight Hohmann Retractor]
Prong Length: 4,2 cm
Overall Length: 9.5" (24,1 cm)

6308 [Femoral Starter Drill]
Drill Tip Dimensions: 18 mm Long X 12 mm Diameter
Overall Length: 6" (15,2 cm)
Shaft Length: 5.25" (13,3 cm)





Lighted retractors can be attached to a
fiber optic light cable with ACMI (female)
connector and can be steam sterilized.

Optional quick-connect driver (NOT INCLUDED
IN RETRACTOR SET) for use with the starter drill:

PRODUCT NO:

8248 [Fixed Driver with
Zimmer Hall Quick-connect]
Overall Length: 5.75" (15,6 cm)
Handle Width: 4.625" (11,6 cm)

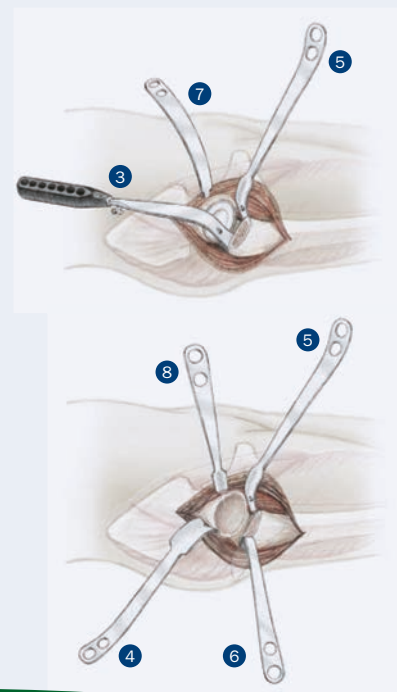

Jeffers Hip Retractor

For use during the anterior approach, this retractor is designed to help protect the TFL from laceration during acetabular preparation in addition to maximizing exposure

Used with or without a weight, it is placed over the TFL and vastus lateralis and under the femur. The broad surface helps to gently retract the TFL and vastus away from the reamer path.


PRODUCT NO:

6384

Overall Length: 9.5" (24,1 cm)
 Depth: 6.5" (16,5 cm)
 Blade Width at Top: 1.8" (4,6 cm)
 Blade Width at Bottom: .8" (2 cm)



Designed by Andrew Jeffers, MD

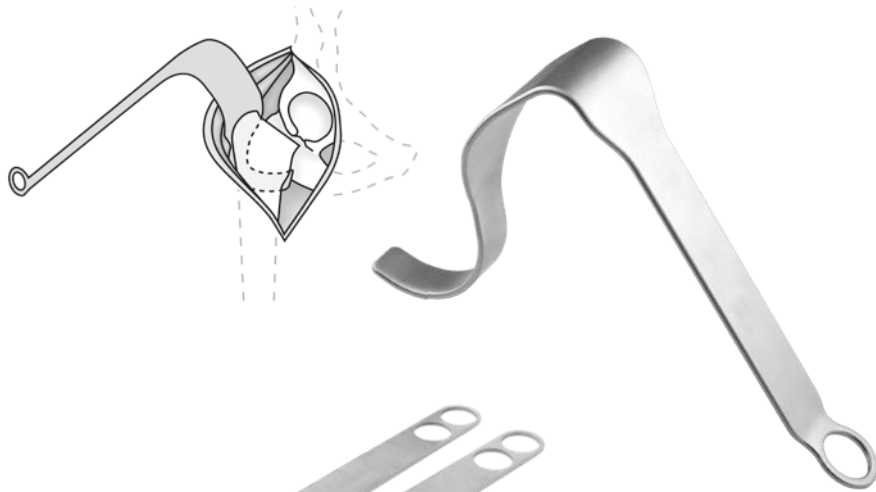

Flared Cobra Retractors - Left & Right

Left and right retractors can be used with the anterior, posterior or lateral approach to help expose the acetabulum in total hip surgery

PRODUCT NO'S:

6110-01 [Double Prong - Right]
 Overall Length: 15" (38 cm)

6110-02 [Double Prong - Left]
 Overall Length: 15" (38 cm)

6109-L [Single Prong - Left]
 Overall Length: 15" (38 cm)

6109-R [Single Prong - Right]
 Overall Length: 15" (38 cm)




Designed by Henry Boucher, MD

Single prong design modification by Walter Frueh, MD



Double Prong

Single Prong

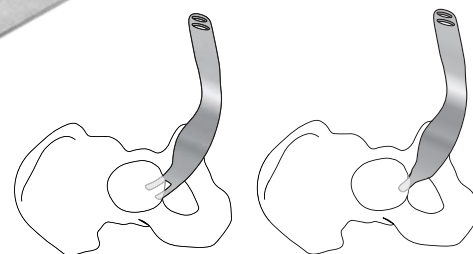

See page 19 for posterior approach positioning

ANTERIOR APPROACH: Placed inferior to the trans-acetabular ligament during exposure and preparation of the acetabular component.

The curve and "twist" of the retractor allow for gentle retraction of the medial and inferior soft tissues and skin. Helps provide easier retraction for the assistant on the other side of the operating table.

Sinha Retractor for Acetabular Reaming

Designed to retract and protect the femur while preparing the acetabulum for reaming during antero-lateral approach total hip surgery

After the femur is prepared and the broach has been placed, the Sinha retractor is placed on the infero-lateral aspect of the acetabulum with the neck of the broach projecting through the large hole in the retractor blade. This serves to displace the femur posteriorly and to help protect the greater trochanter while acetabular reaming is conducted.


PRODUCT NO:

6174

Overall Length: 12.5" (31,8 cm)
 Blade Width: 32 mm
 Hole: 18 mm W x 33 mm H



Design modification by Ajoy K. Sinha, MD

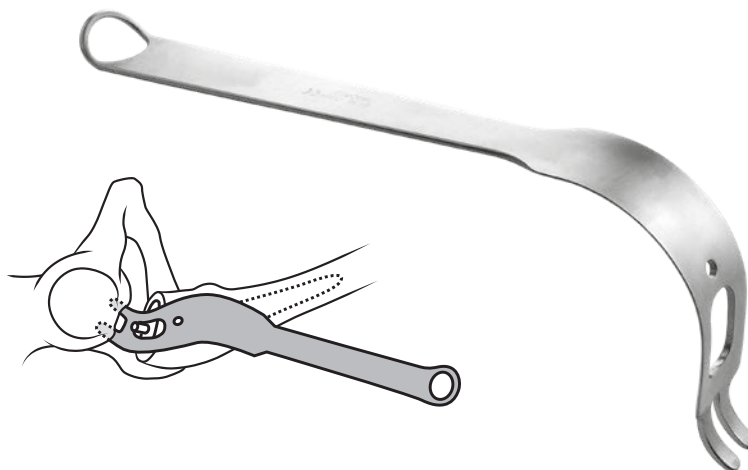

Alvi Modified Hohmann Retractor

Designed for use during minimally invasive anterior hip replacement surgery, the retractor is placed through the capsule, into the femoral head, allowing for retraction of the rectus femoris

The extra bend in the handle allows the assistant to stand on the operative side of the table allowing for ease of handling of the retractor.

PRODUCT NO:

4549

Overall Length: 8.75" (22,2 cm)
 Blade Width: .75" (19 mm)

Designed by Hasham Alvi, MD





Unger Anterior Total Hip Instruments


Universal system specifically designed
for Direct Anterior approach THR

PRODUCT NO'S:

3001 [Unger Wide Hohmann–Single Prong]
1 Blade Width: 44 mm
Blade Depth: 5" (12,7 cm)
Overall Length: 13.5" (34,3 cm)
3008 [Unger Wide Hohmann–Double Prong]
2 Blade Width: 44 mm
Blade Depth: 5" (12,7 cm)
Overall Length: 13.5" (34,3 cm)
3002 [Unger Narrow Hohmann]
3 Blade Width: 34 mm
Blade Depth: 4" (10,2 cm)
Overall Length: 13" (33 cm)
3003 [Unger Blunt Narrow Cobra]
4 Blade Width: 34 mm
Blade Width at Tip: 12 mm
Blade Depth: 5.25" (13,3 cm)
Overall Length: 14.5" (36,9 cm)
3004 [Unger Canal Finder Rasp–Straight]
5 Overall Length: 11" (27,9 cm)
Handle Length: 5" (12,7 cm)
3004-01 [Unger Canal Finder Rasp–Curved]
6 Overall Length: 11" (27,9 cm)
Handle Length: 5" (12,7 cm)
3004-02 [Unger Canal Finder Rasp–Curved with Smooth Proximal]
6s Overall Length: 11" (27,9 cm)
Handle Length: 5" (12,7 cm)
3005-R [Unger Box Osteotome–Right]
7 Overall Length: 12" (30,5 cm)
3005-L [Unger Box Osteotome–Left]
8 Overall Length: 12" (30,5 cm)
3006 [Unger Femoral Neck Elevator]
9 Blade Width at Widest: 25 mm
Overall Length: 13" (33 cm)
Handle Length: 9" (22,9 cm)
3007 [Unger Soft Tissue Protector]
10 Blade Width: 50 mm
Overall Length: 1.75" (4,4 cm)
Handle Length: 10.125" (25,7 cm)
3009-L [Unger Offset Narrow Hohmann–Left]
11 Blade Width: 34 mm
Overall Depth: 4" (10,2 cm)
Overall Length: 13" (33 cm)
3009-R [Unger Offset Narrow Hohmann–Right]
12 Blade Width: 34 mm
Overall Depth: 4" (10,2 cm)
Overall Length: 13" (33 cm)
Optional Instruments:
3006-01 [Femoral Neck Elevator–Long Prong]
13 Blade Width at Widest: 25 mm
Overall Length: 13.4" (34 cm)
Handle Length: 9" (22,9 cm)

Designed by Anthony Unger, MD

Dr. Unger's Surgical Technique available on our website.

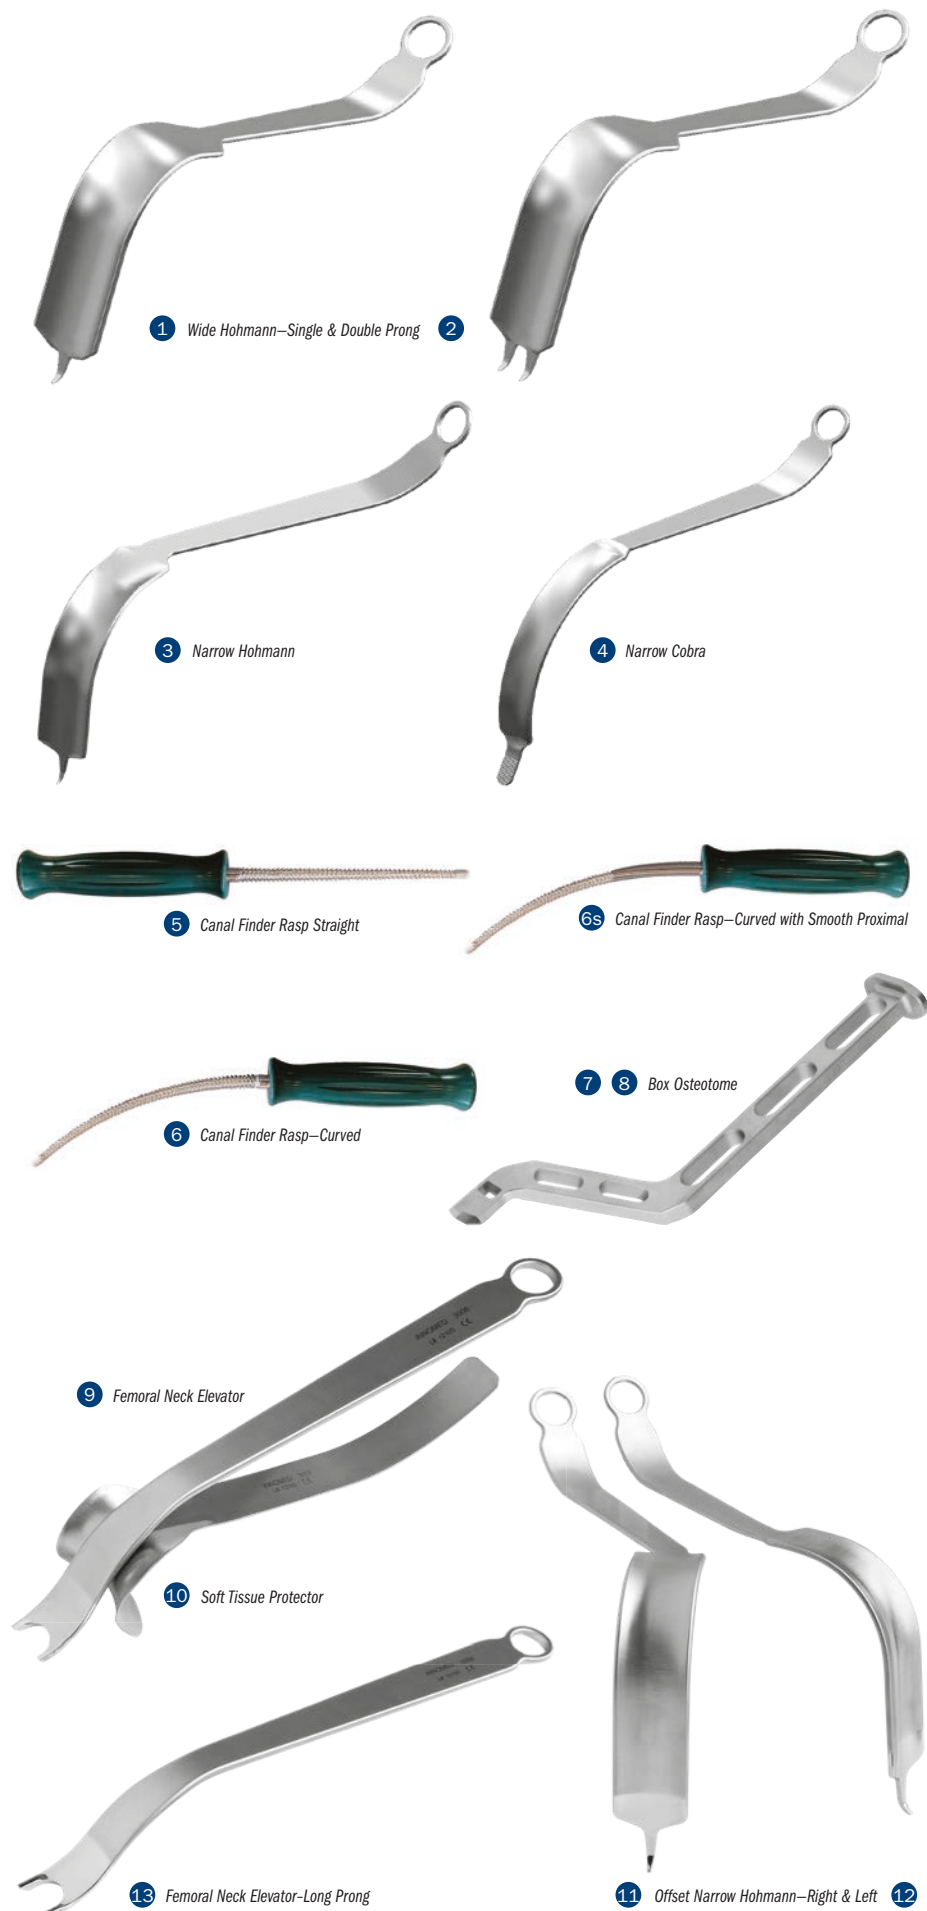

Extension Set for Anterior THR Tables

Designed by David Ott, MD

Designed to add lift to the femoral hook at any point during an anterior THR case and be able to remove without breaking the sterile field

PRODUCT NO'S:

8004-00 [Set of One Each]


Also available individually:

8004-S [Short Extension]
Extension Length: 2" (5,1 cm)
Overall Length: 2.6" (6,6 cm)

8004-L [Long Extension]
Extension Length: 3" (7,7 cm)
Overall Length: 3.625" (9,2 cm)



New!



Das Anterior Total Hip Instruments

Retractor set with included table-mounted controlled-release ratcheting elevator hook, specifically designed to help simplify anterior approach total hip arthroplasty

Surgical technique available on our website.



PRODUCT NO'S:

6221 [#1 - Posterior Femoral Neck / Inferior Acetabular Rim Retractor]

1 Blade Width: 25 mm
Blade Depth: 3" (7,6 cm)
Overall Length: 14" (35,6 cm)

6222 [#2 - Anterior Femoral Neck / Anteromedial Rim Retractor]

2 Blade Width: 31.5 mm, 10 mm @ Tip
Blade Depth: 4.5" (10,2 cm)
Overall Length: 15" (38,1 cm)

6223 [#3 - Anterolateral Acetabular Rim Retractor]

3 Blade Width: 18 mm
Blade Depth: 3.25" (8,3 cm)
Overall Length: 10" (25,4 cm)

6226-TA [#4 - Table Mounted Hook Hoist]

4 This product number includes one 6226-RH Elevator Hook
Folds to approx: 21" x 5" x 5" (53,4 cm x 12,7 cm x 12,7 cm)

6226-RH [#5 - Proximal Femoral Hook]

5 Blade Depth from T-Handle: 7.5" (19,1 cm)
Overall Length: 9.25" (23,5 cm)

6227 [#6 - Femoral Calcar Retractor]

6 Blade Width: 25 mm
Blade Depth: 2" (5,1 cm)
Overall Length: 14.5" (36,9 cm)

6225 [#7 - Greater Trochanteric Retractor]


7 Blade Width: 25 mm
Blade Depth: 1.5" (3,8 cm)
Overall Length: 14.875" (37,8 cm)

Optional Instruments:

6226-EH [Flat Proximal Femoral Hook]

Blade Depth from T-Handle: 7.5" (19,1 cm)
Overall Length: 9.25" (23,5 cm)

Designed by Amal Das, MD and Brian Seng, DO

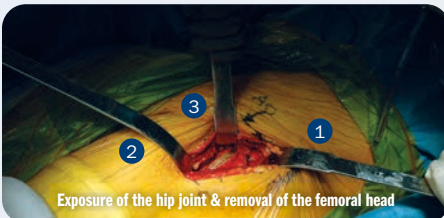


Exposure of the hip joint & removal of the femoral head



Table Assembly/Elevator Hook for femoral access



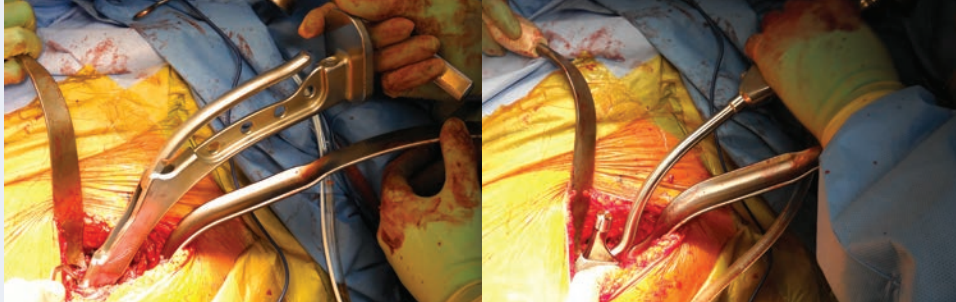

Bozeman Direct Anterior THA Femoral Elevator

Designed to elevate the femur anteriorly, providing exposure to allow broaching of the femoral canal and final placement of the femoral component, during direct anterior approach THA

Helps to retract the TFL muscle out of the way, and provides surface area for the fulcrum effect, helping to reduce pressure on the muscle. Narrow design is helpful in minimally invasive surgery.

The flared end joins the prongs to help maintain soft tissue retraction away from the broach teeth, while the two prong design helps placement lateral to the tip of the greater trochanter and elevates the femur.

PRODUCT NO'S:

6144 [Small]
Overall Length: 11.5" (29,2 cm)
Blade Neck Width: 26.1 mm
Blade Flared End Width: 30.1 mm
6146 [Medium]
Overall Length: 13.5" (34,3 cm)
Blade Neck Width: 29.8 mm
Blade Flared End Width: 34.7 mm
6145 [Large]
Overall Length: 15.5" (39,4 cm)
Blade Neck Width: 33.6 mm
Blade Flared End Width: 39.3 mm

Designed by Daniel M. Gannon, MD



O'Reilly Dual Handle Direct Anterior Retractor

Designed for use over the anterior pelvic rim during acetabular exposure in direct anterior THA, the dual handle design allows for use in both right and left hips, as well as easy exchange of the instrument between assistants

Can be used in MIS/Direct Anterior, Total Hip Arthroplasty, Posterior/Anterolateral THA, and Hemiarthroplasty.

PRODUCT NO:

3011
Overall Length: 13.25" (33,7 cm)
Blade Depth: 4.25" (10,8 cm)
Blade Width: 1" (2,5 cm)

Designed by Michael P. O'Reilly, MD



O'Reilly Direct Access Anterior Broaching Retractor

Designed for use in obtaining improved proximal exposure for femoral canal preparation during minimally invasive direct anterior THA

- ▶ Lateral flange protects the muscle of tensor fascia lata and soft tissues during insertion and removal of femoral broaching instruments
- ▶ Narrow tip for deep placement posterior to the femoral neck, anterior to the greater trochanter
- ▶ Rotation of the retractor handle helps keep the instrument against the patient and out of the surgeon's line of sight

PRODUCT NO'S:

4698-L [Left]	4698-R [Right]
Overall Length: 9.5" (24,1 cm)	Overall Length: 9.5" (24,1 cm)
Blade Width: 57 mm	Blade Width: 57 mm

Designed by Michael P. O'Reilly, MD



Duke Inferior Retractors with Extra Grip Tip – Left & Right

An inferior acetabular retractor designed for total hip arthroplasty while prepping the acetabulum



PRODUCT NO'S:


7621-01 [Left]

Overall Length: 10.25" (26 cm)
Handle Length: 5" (12.7 cm)
Depth: 7.5" (19.1 cm)
Blade Length: 2.75" (7 cm)
Blade Width: 1.125" (2.9 cm)
Prong Length: 1" (2.5 cm)
Prong Width: 6 mm

7621-02 [Right]

Overall Length: 10.25" (26 cm)
Handle Length: 5" (12.7 cm)
Depth: 7.5" (19.1 cm)
Blade Length: 2.75" (7 cm)
Blade Width: 1.125" (2.9 cm)
Prong Length: 1" (2.5 cm)
Prong Width: 6 mm

Designed by Justin Duke, MD

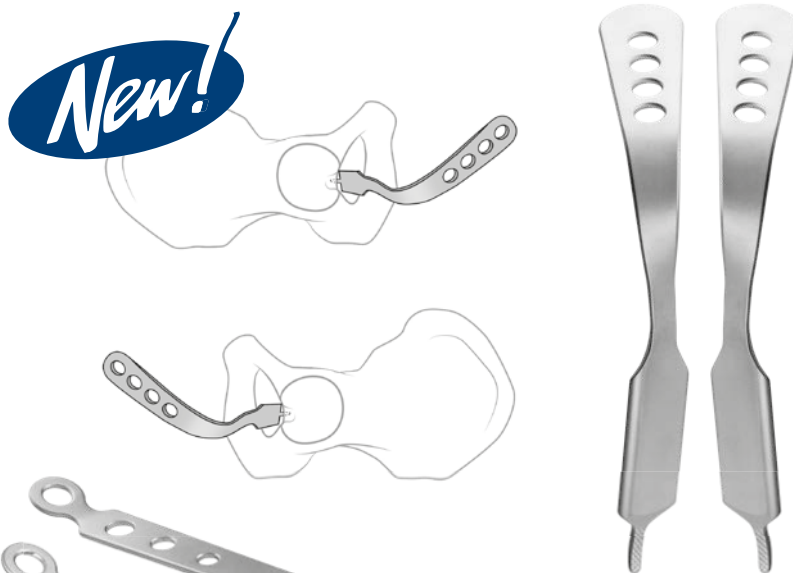

Modified Anterior Hip Retractor

Designed to provide exposure of the proximal femur


PRODUCT NO:

6421 [Narrow Tip]

Overall Length: 15.75" (40 cm)
Blade Width: 1.15" (3 cm)

6422 [Wide Tip]

Overall Length: 15.75" (40 cm)
Blade Width: 1.15" (3 cm)

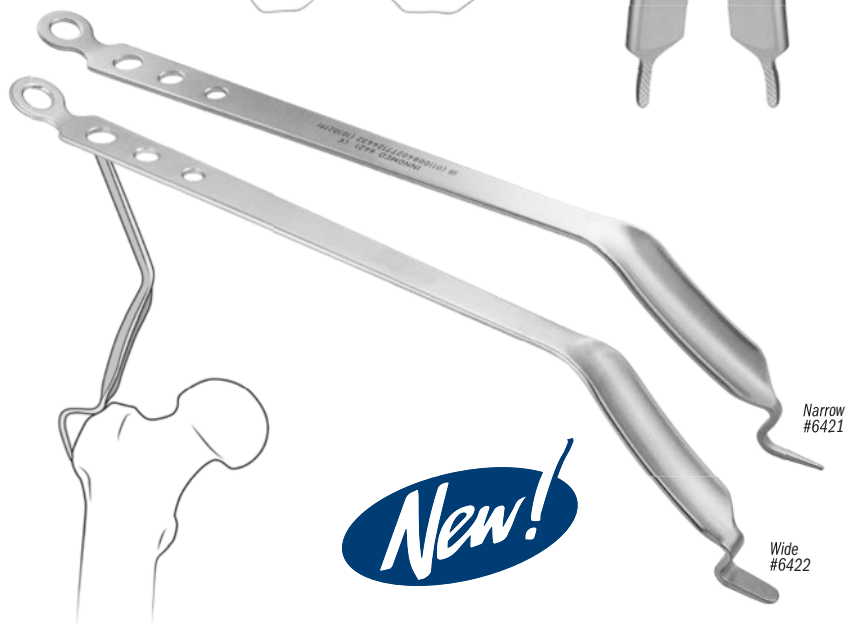

Posterior Acetabular Retractor

A posterior acetabular retractor designed for total hip arthroplasty while prepping the acetabulum

PRODUCT NO:

6224

Blade Width: 25 mm
Blade Depth: 2.75" (7 cm)
Overall Length: 14" (35.6 cm)

Designed by Amal Das, MD
and Brian Seng, DO



Modified Anterolateral Retractor Set

Used for anterior MIS hip surgery

PRODUCT NO'S:


6161-00 [Modified Anterolateral Retractor Set]
Set includes: (2) 6162, (1) 6163, (1) 6164




Also available individually:

6162 [Modified Deep Hohmann Retractor – A]
(2) included in set, (1) only with this product number
Overall Length: 14.5" (36.9 cm)
Blade Width: 25 mm

6163 [Modified Small Hohmann Retractor – B]
Overall Length: 8.5" (21.6 cm)
Blade Width: 18 mm

6164 [Modified Mueller Retractor – C]
Overall Length: 15.25" (38.8 cm)
Blade Width: 25 mm

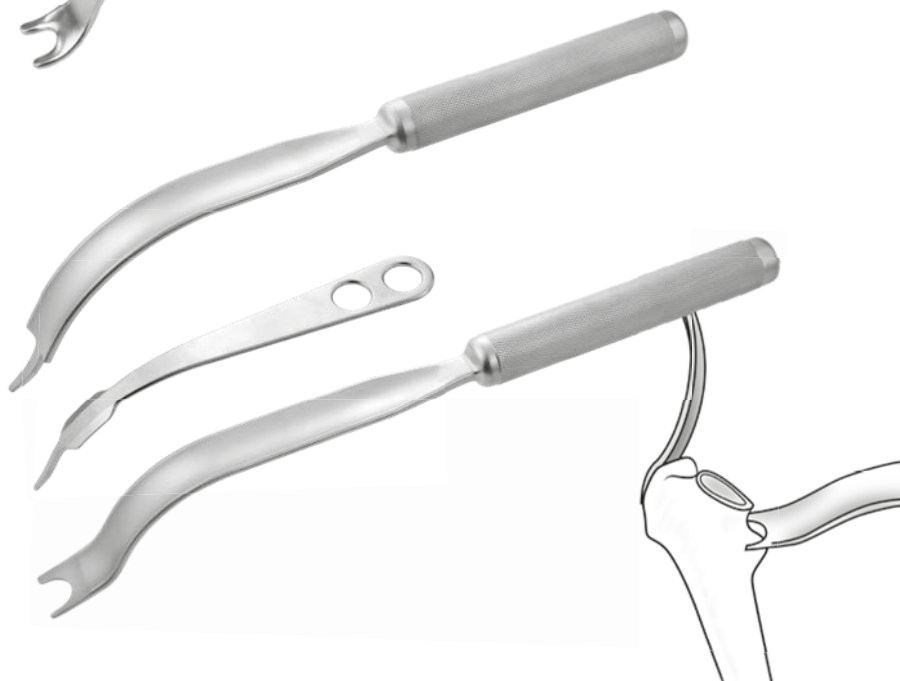

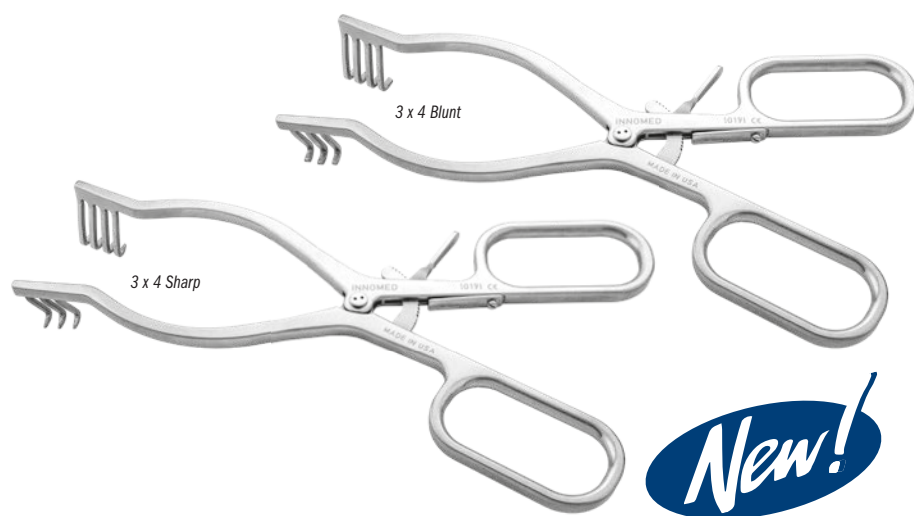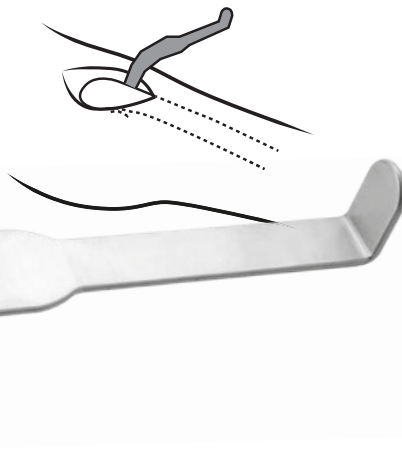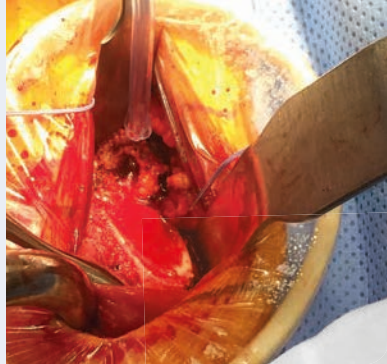

Hope Direct Anterior Femoral Retractor

Designed to aid in exposure of the calcar femorale for proximal femoral exposure and broaching

PRODUCT NO:

5838
Overall Length: 11" (27,9 cm)
Blade Width: 1" (2,54 cm)

Designed by Charles A. Hope, MD



Hur Modified Mueller-type Femoral Neck Elevator

Designed for the anterior approach to help expose the femoral calcar during broaching

The modified Mueller-type design non-forked end helps reduce stress risers and fractures.

PRODUCT NO:

3416
Overall Length: 13" (33 cm)
Handle Length: 6.5" (16,5 cm)
Blade Width at Widest: 1.25" (31,7 mm)



Wide blade design modification by John Hur, MD

Whelan Large Anterior Hip Weitlaner Retractor

Designed for self-retaining exposure during anterior approach THA

PRODUCT NO'S:

1576-B [Blunt]
Overall Length: 9" (22,9 cm)
Blade Depth: 1" (2,54 cm)

1576-S [Sharp]
Overall Length: 9" (22,9 cm)
Blade Depth: 1" (2,54 cm)



Designed by Edward J. Whelan III, MD

Alvi Beckman Self-Retaining Retractor

Designed for direct anterior approach hip arthroplasty, the wide, blunt and curved teeth help provide for better self-retaining retraction during dissection through the superficial and deep tissue planes to expose the hip joint

PRODUCT NO:

1577
Overall Length: 13" (33 cm)
Length to Bend: 9.625" (24,4 cm)
Depth when Full Bent: 3.125" (7,9 cm)

Designed by Hasham Alvi, MD



Wixson Anterior Suspension Hook System

Designed for use with a standard operating room table, helps to facilitate elevation of the proximal femur during direct anterior approach THR

The system consists of:

- 1) A **rotating clamp** that can be attached to the operating table side rails over the drapes.
- 2) A **vertical bar** that fits into the clamp and comes above the side of the table.
- 3) A **horizontal attachment** that fits over the vertical bar and can swing over the wound.
- 4) A threaded **tightening rod** that inserts through a slot in the arm of the horizontal attachment and can be used to bring up the proximal femur.
- 5) A large **offset femoral hook** that can be placed above the lesser trochanter and around the posterior femoral neck and trochanter base. The handle of the hook has a chain to attach to the threaded tightening rod coming through the horizontal arm.

Used for femoral preparation after the acetabular component has been implanted



PRODUCT NO'S:

6245-00 [Complete Unit]

Replacement Parts:

6245-01 [Horizontal Attachment]

6245-02 [Tightening Rod]

6245-03 [Vertical Bar]

6245-04 [T-handle Bolt]


6245-05 [Offset Femoral Hook]

9125 [Rotating Table Clamp]

Complete unit includes:

Tightening rod, horizontal attachment, vertical bar, T-handle bolt, offset femoral hook, and rotating table clamp

Designed by Richard L. Wixson, MD

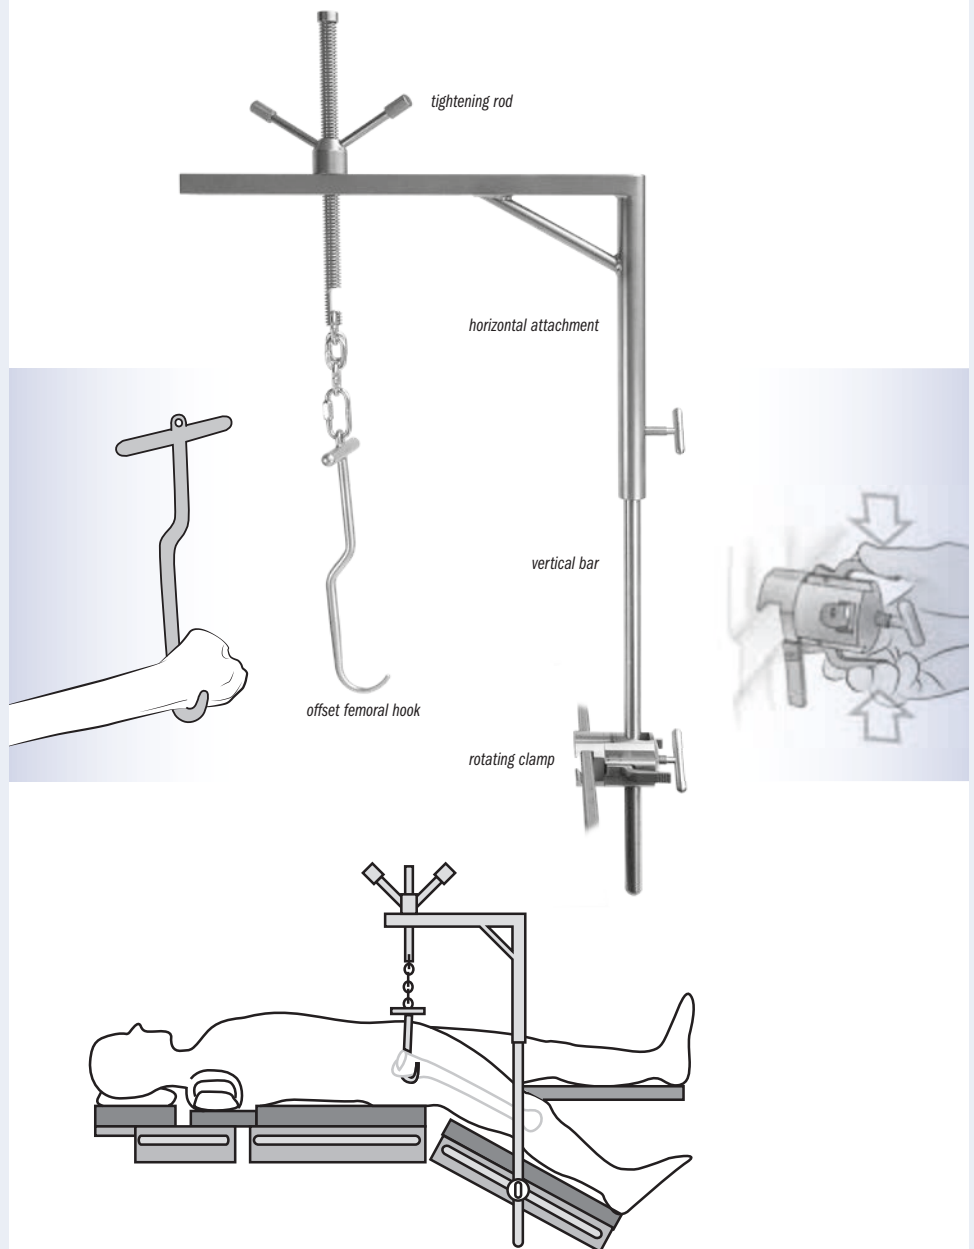

Alvi Small Charnley Style Locking Frame Set

A self-retaining frame and retractor system designed for use during anterior total hip arthroplasty, the blades help retract the hip capsule and musculature, permitting an unobstructed view of the acetabulum while freeing an assistant

PRODUCT NO'S:

7425-00 [Set]

Also available individually:

7425-01 [Small Locking Frame]
Dimensions: 9" x 7" (22,9 cm x 17,8 cm)

7425-02 [2" Tapered Blade]
Blade Depth: 2" (5,1 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 1" (2,54 cm)


7425-03 [3" Tapered Blade]
Blade Depth: 3" (7,6 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 1" (2,54 cm)

7425-04 [4" Tapered Blade]
Blade Depth: 4" (10,2 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 1" (2,54 cm)

Set comes with locking frame (7425-01) and one each of the three blade sizes: 2" (7425-02), 3" (7425-03), and 4" (7425-04)

Designed by Hasham Alvi, MD



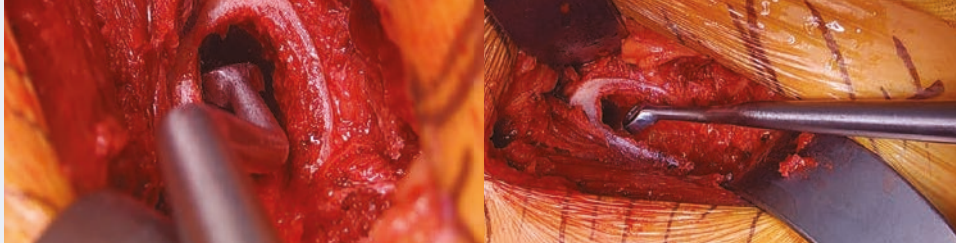

Powers Double Bent Curette Set

The bayonet curettes help allow for proper lateralization and seating of the broach



PRODUCT NO'S:	
5190-00	[Set of Three]
Also available individually:	
5190-L [Angled Left]	
Overall Length: 16.875" (42,9 cm)	
Handle Length: 9" (22,9 cm)	
Shaft Length Before Bend: 5.25" (13,3 cm)	
Bend Offset: .5" (1,3 cm)	
Curette Cup Angle: 33°	
Curette Cup Inner Dimen.: 6 mm X 8,7 mm	
5190-R [Angled Right]	
Overall Length: 16.875" (42,9 cm)	
Handle Length: 9" (22,9 cm)	
Shaft Length Before Bend: 5.25" (13,3 cm)	
Bend Offset: .5" (1,3 cm)	
Curette Cup Angle: 33°	
Curette Cup Inner Dimen.: 6 mm X 8,7 mm	
5190-S [Straight]	
Overall Length: 17" (43,2 cm)	
Handle Length: 9" (22,9 cm)	
Shaft Length Before Bend: 5.25" (13,3 cm)	
Bend Offset: .5" (1,3 cm)	
Curette Cup Angle: 33°	
Curette Cup Inner Dimen.: 6 mm X 8,7 mm	

Designed by
Mark Powers, MD
 USA MADE




Bhargava DAA Femoral Stem Impactor

Helps allow for easier impaction of most femoral stems through the DAA approach – protects the trunion and helps allow for control of version during impaction

PRODUCT NO:	
5308	
Overall Length: 10" (25,4 cm)	

Designed by Tarun Bhargava, MD
 USA MADE




Powers Femoral Sounds

Allows the surgeon to gently identify the canal of a long bone as well as its width (isthmus) prior to inserting a device

Particularly useful for the anterior approach to the hip. Helps identify intraoperative occult fractures. Properly identifying the medullary canal before broaching helps minimize possible intraoperative fractures.

PRODUCT NO'S:	
4189-00	[Set of 5]
Also available individually:	
4189-06 [6 mm]	
Overall Length: 14.25" (36,2 cm)	
Handle Length: 3.5" (8,9 cm)	
4189-08 [8 mm]	
Overall Length: 14.25" (36,2 cm)	
Handle Length: 3.5" (8,9 cm)	
4189-10 [10 mm]	
Overall Length: 14.25" (36,2 cm)	
Handle Length: 3.5" (8,9 cm)	
4189-12 [12 mm]	
Overall Length: 14.25" (36,2 cm)	
Handle Length: 3.5" (8,9 cm)	
4189-14 [14 mm]	
Overall Length: 14.25" (36,2 cm)	
Handle Length: 3.5" (8,9 cm)	

Designed by
Mark Powers, MD
 USA MADE

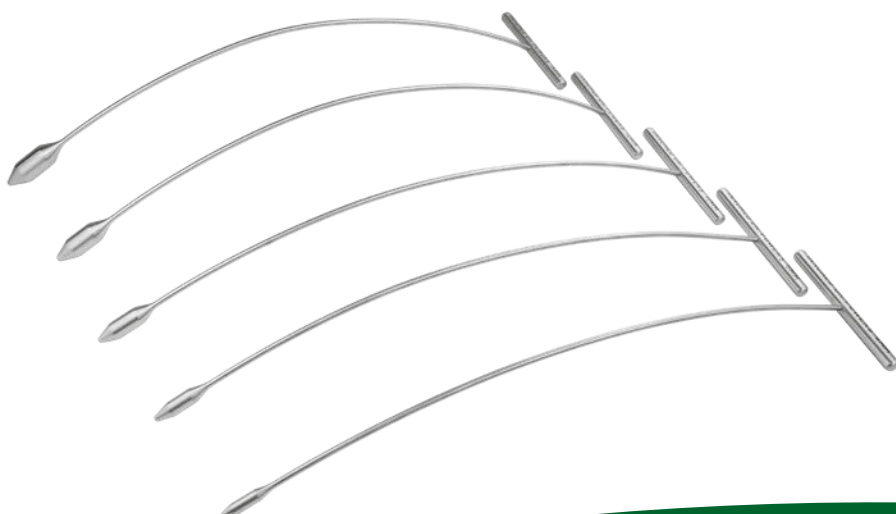

O'Reilly Femoral Head Extractor

Designed to help remove the femoral head—during THA, MIS Direct Anterior THA, and hip fracture surgery/hemiarthroplasty

The perpendicular osteotome blades help provide purchase in osteoporotic bone, while the central osteotome provides a visual estimate of the instrument's depth of penetration to avoid acetabular injury with use during hemiarthroplasty.

The handle helps obtain rotational torque needed to rotate and dislocate the femoral head in direct anterior hip arthroplasty.

PRODUCT NO'S:

3675 [Large]

Overall Length: 9.5" (24,1 cm)

Hammer Platform Diameter: 1.125" (2,9 cm)

Width at End: 1.1" (2,8 cm)

3674 [Small]

Overall Length: 9.5" (24,1 cm)



Hammer Platform Diameter: 1.125" (2,9 cm)

Width at End: .75" (1,9 cm)



Designed by Michael P. O'Reilly, MD

Small version designed modification by Tarum Bhargava, MD

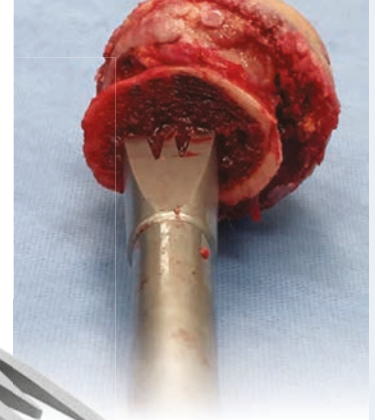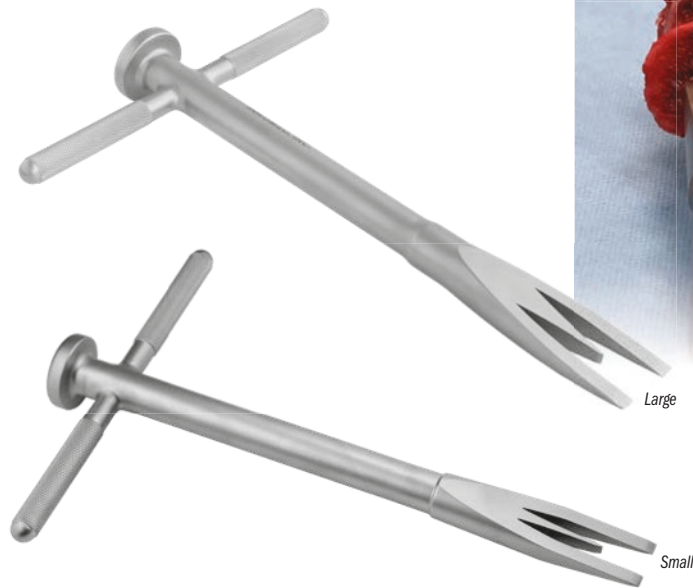

Huddleston Femoral Head Removers

Designed to help lever a femoral head out of the acetabulum in standard and anterior approach total hip replacement

PRODUCT NO'S:

3608 [Sharp]

Overall Length: 10.5" (26,7 cm)

Scoop Length: 3" (7,6 cm)

Scoop Width: 29 mm


3609 [Dull]

Overall Length: 10.5" (26,7 cm)

Scoop Length: 3" (7,6 cm)

Scoop Width: 29 mm

Designed by H. Dennis Huddleston, MD

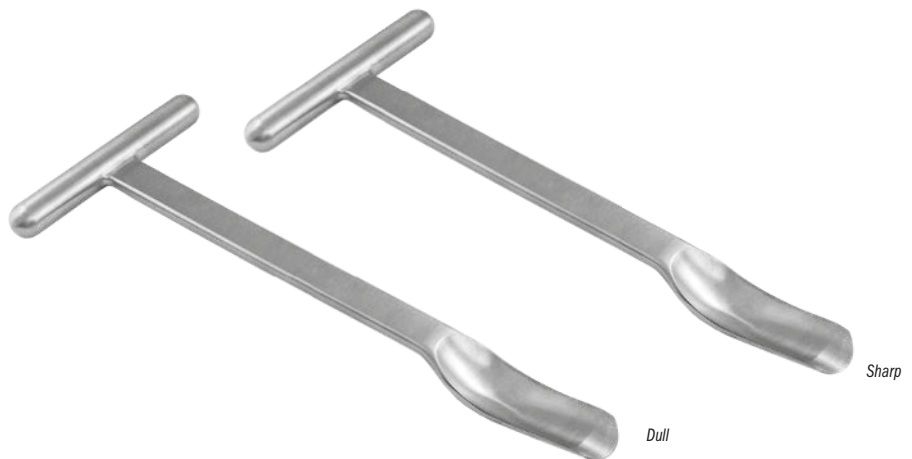

Kim Anterior Total Hip Awl

Designed to help avoid perforation of the femoral canal while helping to give an accurate assessment of canal orientation for trial broaching during anterior approach THA

PRODUCT NO:


8028

Overall Length: 12" (30,5 cm)

Blunt Reamer Length: 2" (5,1 cm)



Designed by William C. Kim, MD

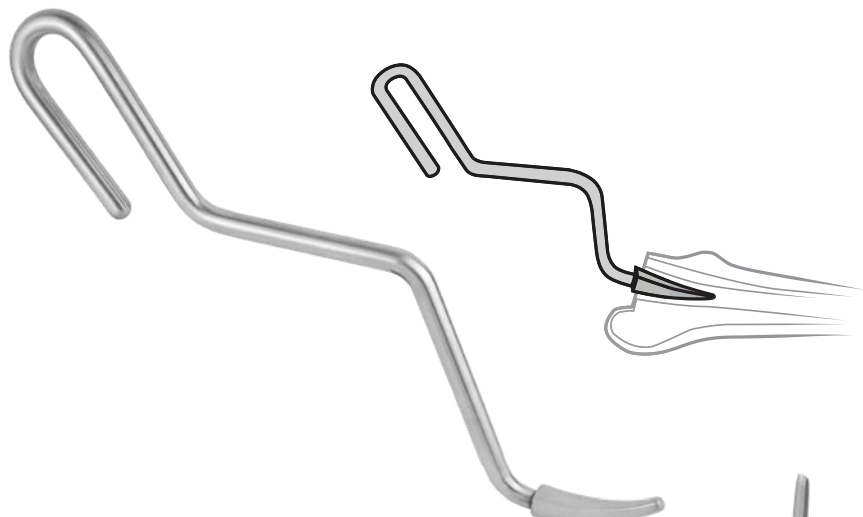

Wertz Anterior THA Femoral Elevator

Helps deliver the femur out of the incision during anterior total hip arthroplasty

Inserted into the femoral canal for elevation, the knurled underside helps to reduce the chance of slippage.

PRODUCT NO:

6148

Overall Length: 12.625" (32,1 cm)

Blade Length: 3" (7,6 cm)

Designed by Michael P. Wertz, MD



Anterior Hip Referencing Rod Assembly

For use during intraoperative imaging while performing anterior hip arthroplasty to help determine implant fit, position, alignment and recreation of leg length and offset using the contralateral hip for reference

- ▶ Designed to be overlayed on the pelvis during the imaging part of the procedure to compare leg length and offset to the contra lateral hip using the trans teardrop or trans ischial line as reference
- ▶ Extended length allows the surgeons hands to remain outside of the imaging beam
- ▶ Notched in increments of 1 cm for ease of reference
- ▶ Features a threaded coupler midshaft to break down for processing and storage, allowing the unit to fit into a traditional tray

PRODUCT NO'S:

2674-00 [Complete Assembly]
Overall Length: 27.75" (70,5 cm)
Rod Diameter: .25" (6,3 mm)

2674-A [Top Assembly]
Overall Length: 16.75" (42,6 cm)
Rod Diameter: .25" (6,3 mm)

2674-B [Bottom Assembly]
Overall Length: 10.5" (26,7 cm)
Rod Diameter: .25" (6,3 mm)



Designed by
Scott A. Foster, MD

Kenerly Femoral Neck Cutting Guide

Designed for use during the anterior approach for THA to help determine the femoral neck osteotomy location

The guide is placed on the femoral neck and adjusted using the intraoperative C-arm image to visualize and compare to the pre-op templating, providing an excellent location for the initial femoral neck osteotomy

PRODUCT NO:

4590
Overall Length: 8.25" (21 cm)
Handle Length: 1.9" (4,8 cm)
Cutting Guide Bar Length: 1.22" (3,1 cm)
End of Bar to Tip Length: 3.5 mm
Shaft Angle at End: 30°
Shaft Diameter .125" (3,2 mm)

Designed by
J. Lex Kenerly, III, MD



T-Handle Femoral Canal Finders

Designed to sound the femoral canal prior to stem broaching, especially useful to help start the broach path during the direct anterior approach

Rockowitz T-Handle Femoral Canal Finder Rasp

PRODUCT NO:

4990
Overall Length: 9" (22,9 cm)
Curved Rasp Portion: 4" (10,2 cm)

Designed by
Neal L. Rockowitz, MD



T-Handle Femoral Canal Finder – Smooth

PRODUCT NO:




4990-03 [Smooth]
Overall Length: 9.385" (24,4 cm)



Modified T-Handle Femoral Canal Finder Rasp

PRODUCT NO:

4989
Overall Length: 9" (22,9 cm)
Curved Rasp Portion: 4" (10,2 cm)

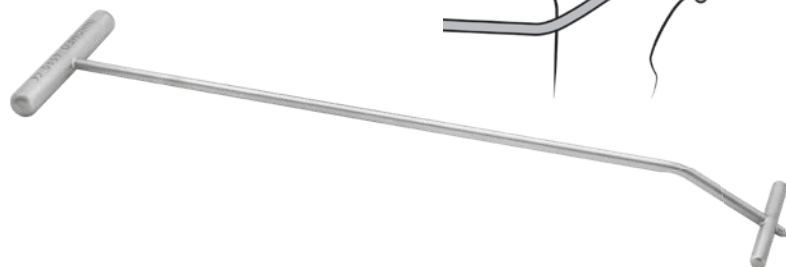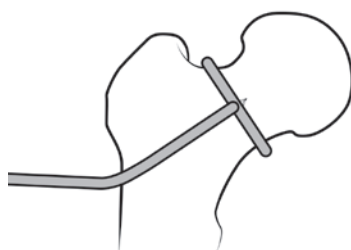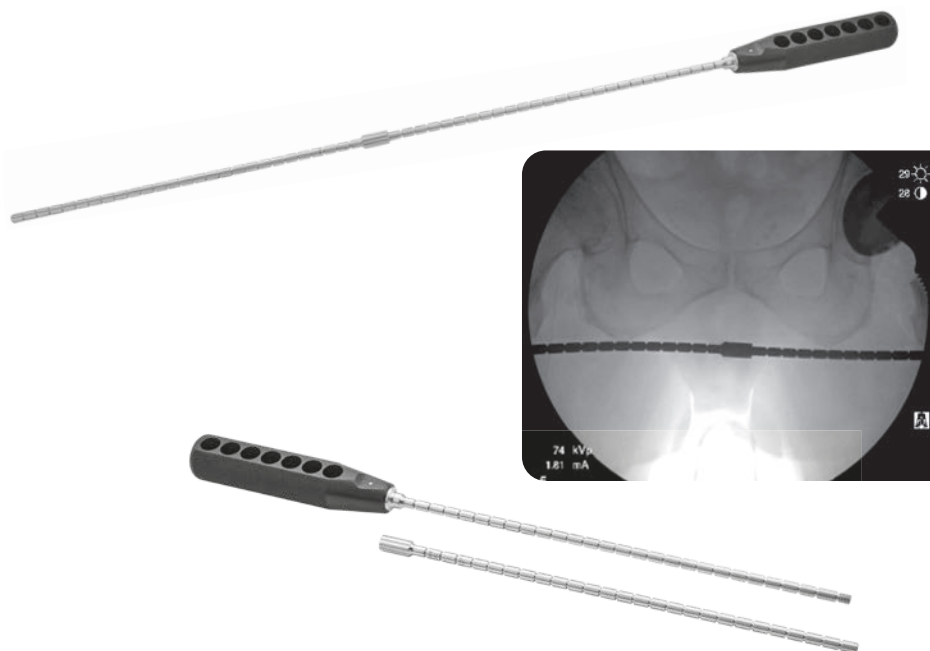

ORIGINAL DR. ROCKOWITZ DESIGN Topside Rasp

Rasp on curve topside and sides,
smooth on underside



SMOOTH DESIGN

No rasp – smooth underside,
sides, and topside




MODIFIED DESIGN Underside Rasp

Rasp on curve underside and sides,
smooth on topside



Lombardi Bone Hooks

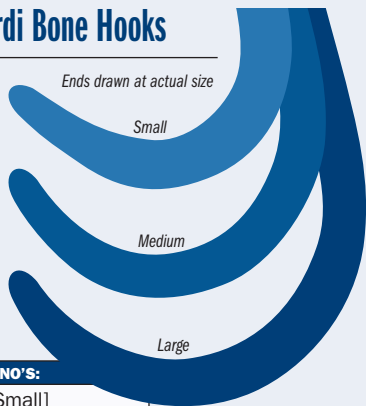


PRODUCT NO'S:

5925 [Small]
Curve Diameter: 25 mm
Overall Length: 10" (25,4 cm)
5930 [Medium]
Curve Diameter: 35 mm
Overall Length: 10" (25,4 cm)
5935 [Large]
Curve Diameter: 50 mm
Overall Length: 10" (25,4 cm)

Designed by Adolph V. Lombardi, MD



Bone Hooks

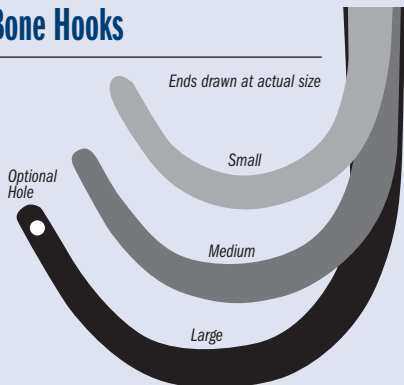

Designed for proximal femoral elevation in total hip replacement or in other surgery with a similar need for bone manipulation. The instrument has a blunt tip and a large handle to accommodate the use of two hands if desired.

PRODUCT NO'S:

5910 [Small]
Curve Diameter: 25 mm
Overall Length: 12.75" (32,4 cm)
Handle Length: 4.75" (12,1 cm)
5915 [Medium]
Curve Diameter: 35 mm
Overall Length: 12.75" (32,4 cm)
Handle Length: 4.75" (12,1 cm)
5920 [Large]
Curve Diameter: 50 mm
Overall Length: 12.75" (32,4 cm)
Handle Length: 4.75" (12,1 cm)
5920-01 [Large w/Cable/Wire Hole]
Designed by: R.L. Wixson, MD & J. McCarthy, MD
Cable/Wire Hole Diameter: 2 mm
Curve Diameter: 50 mm
Overall Length: 12.75" (32,4 cm)
Handle Length: 4.75" (12,1 cm)

Designed by R.L. Wixson, MD



Sarraf Coated Hip Dislocation Hook

Designed to aid in dislocating a femoral stem while helping to prevent damage to the trunion

Coated end helps to prevent from marring component surfaces. Can also be used as a bone hook, and for femoral elevation.

PRODUCT NO:

5905
Curve Diameter: 50 mm
Overall Length: 12.5" (31,8 cm)
Handle Length: 4.75" (12,1 cm)

Designed by Khaled M. Sarraf, MD





① Extra Deep
Mueller-type
Femoral Neck Elevator

② Extra Deep
Modified Hohmann

③ Extra Deep
Long Narrow
Blunt Hohmann

④ Extra Deep
Modified Blunt
Hohmann

⑤ Extra Deep
Hohmann


⑥ Extra Deep
Single Prong
Soft Tissue

⑦ Extra Deep
Single Prong
Acetabular

⑧ Extra Deep
Modified Wide
Hohmann

⑨ Extra Deep
Bent Hohmann

⑩ Extra Deep
Large Cobra

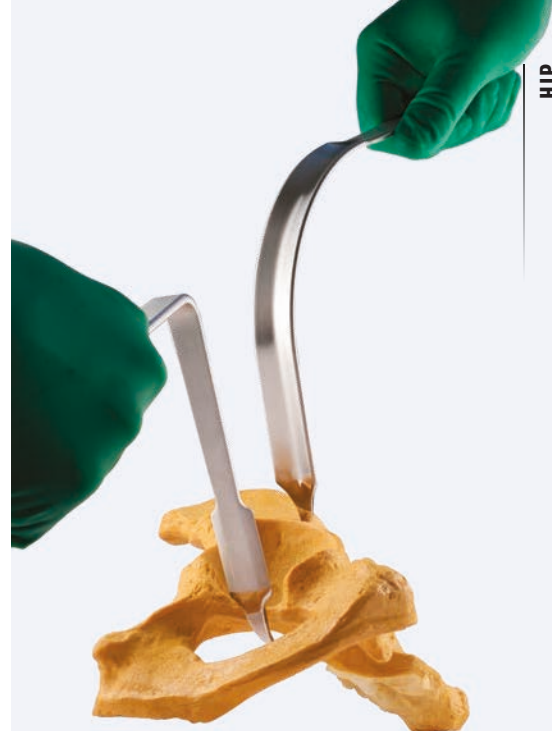

Extra Deep Hip Retractors

*For hip surgery with large patients, and
when extra large instruments are desired
for increased depth and leverage*


All Extra Deep retractors are 2" (5 cm)
longer than their standard version.



PRODUCT NO'S:

①	3418 [Extra Deep Mueller-type Femoral Neck Elevator] Overall Length: 15.25" (38,8 cm) Handle Length: 6.5" (16,5 cm) Blade Width at Widest: 25 mm
②	4535-01 [Extra Deep Modified Narrow Hohmann Retractor] Overall Length: 11.5" (29,2 cm) Blade Width: 16.4 mm
③	4540-01 [Extra Deep Long Narrow Blunt Hohmann Retractor] Overall Length: 13.25" (33,7 cm) Blade Width: 22 mm Blade Width at End: 16 mm
④	4550-01 [Extra Deep Modified Blunt Hohmann Retractor] Overall Length: 13.25" (33,7 cm) Blade Width at End: 11 mm
⑤	4558-01 [Extra Deep Hohmann Retractor] Overall Length: 11.5" (29,2 cm) Blade Width: 16.7 mm
⑥	6450-01 [Extra Deep Single Prong Soft Tissue Retractor] Overall Length: 13.75" (34,9 cm) Blade Width: 22.3 mm
⑦	6570-01 [Extra Deep Single Prong Acetabular Retractor] Overall Length: 13.75" (34,9 cm) Blade Width: 22.3 mm
⑧	6595-01 [Extra Deep Modified Wide Hohmann Retractor] Overall Length: 11.5" (29,2 cm) Blade Width: 42.5 mm
⑨	7115-03 [Extra Deep Bent Hohmann Retractor] Overall Length: 12.125" (30,8 cm) Handle Length: 9.75" (24,8 cm) Depth from Bend: 6.25" (15,9 cm) Blade Width: 19 mm
⑩	7630-03 [Extra Deep Large Cobra Retractor] Overall Length: 19" (48,2 cm) Handle Length: 14" (35,6 cm) Blade Width at Widest: 33 mm

Extra Deep Mueller-type Femoral Neck Elevator modified by Tom Eickmann, MD

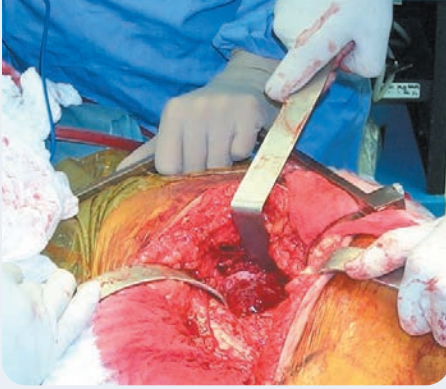

Extra Large Hip Retractors

For hip surgery with large patients, and when extra large instruments are desired for increased leverage and depth

PRODUCT NO'S:

7650 [Extra Leverage Femoral Neck Elevator – Standard]

1 Overall Length: 18.25" (46,4 cm)
Handle Length: 9.25" (23,5 cm)
Blade Width: 38 mm

7650-02 [Extra Leverage Femoral Neck Elevator – Short Handle]

2 Overall Length: 15.25" (38,8 cm)
Handle Length: 6.25" (15,9 cm)
Blade Width: 38 mm

7620-01 [Infero-posterior Acetabular Capsule Retractor – Right]

3 Overall Length: 12" (30,5 cm)
Handle-to-Bend Length: 6" (15,2 cm)

7620-02 [Infero-posterior Acetabular Capsule Retractor – Left]

4 Overall Length: 12" (30,5 cm)
Handle-to-Bend Length: 6" (15,2 cm)

7640 [Extra Leverage Proximal Femoral Elevator]

5 Overall Length: 17.5" (44,5 cm)
Handle Length: 13" (33 cm)
Blade Width at Widest: 63 mm

7630-01 [Large Cobra Retractor – Standard]

6 Overall Length: 17.5" (44,5 cm)
Handle Length: 14" (35,6 cm)

7630-02 [Large Cobra Retractor – Wide]

7 Overall Length: 17.5" (44,5 cm)
Handle Length: 14" (35,6 cm)

7630-03 [Extra Deep Large Cobra Retractor]

8 Overall Length: 19" (48,3 cm)
Handle Length: 14" (35,6 cm)
Blade Width at Widest: 33 mm


Designed by Wayne M. Goldstein, MD



INNOMED



1 2 Extra Leverage Femoral Neck Elevators

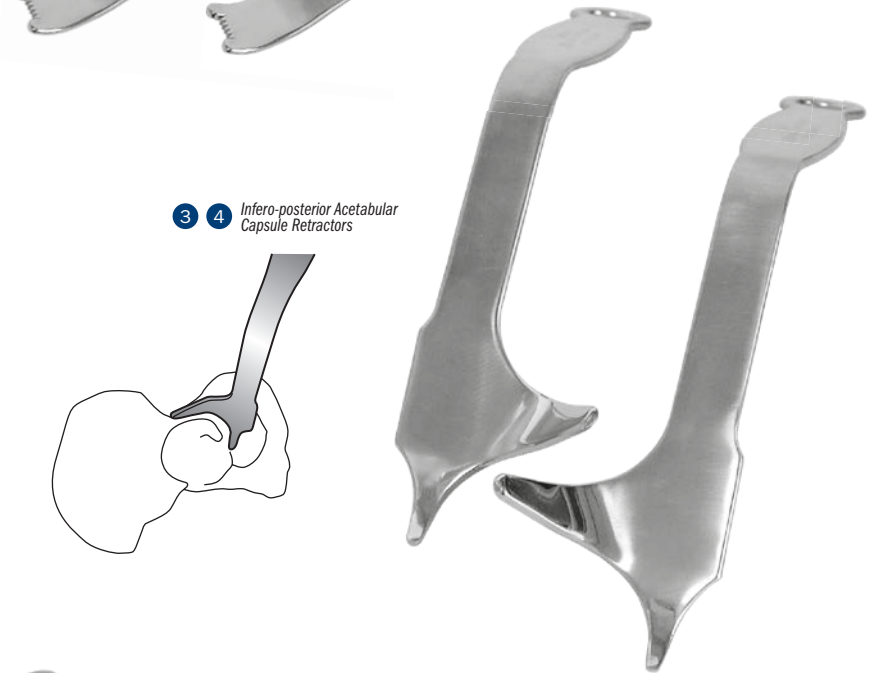

3 4 Infero-posterior Acetabular Capsule Retractors



5 Extra Leverage Proximal Femoral Elevator



6 7 8 Large Cobra Retractors



Standard Tip

Cross-Hatched Tip

Extra Deep Cobra Retractors

For use around the femur and acetabulum in larger patients

A full 2" (5 cm) longer in the wide cobra blade portion than our standard cobra retractor.

PRODUCT NO'S:

6133 [Standard Tip]
Overall Length: 12.75" (32,4 cm)
Handle Length: 6.75" (17 cm)
Blade Width at Widest: 33 mm

6134 [Cross-Hatched Tip]
Overall Length: 12.75" (32,4 cm)
Handle Length: 6.75" (17 cm)
Blade Width at Widest: 33 mm




Large Curved Hibbs-style without Teeth Soft Tissue Retractor

The large, curved end is very useful with large patients

The right angle end was designed without teeth for easier holding while retracting, but can also be used as a blunt end retractor.

PRODUCT NO:

7180-01
Overall Length: 8" (20,3 cm)
Blade Width: 32 mm
Blade Depth: 3.5" (8,9 cm)

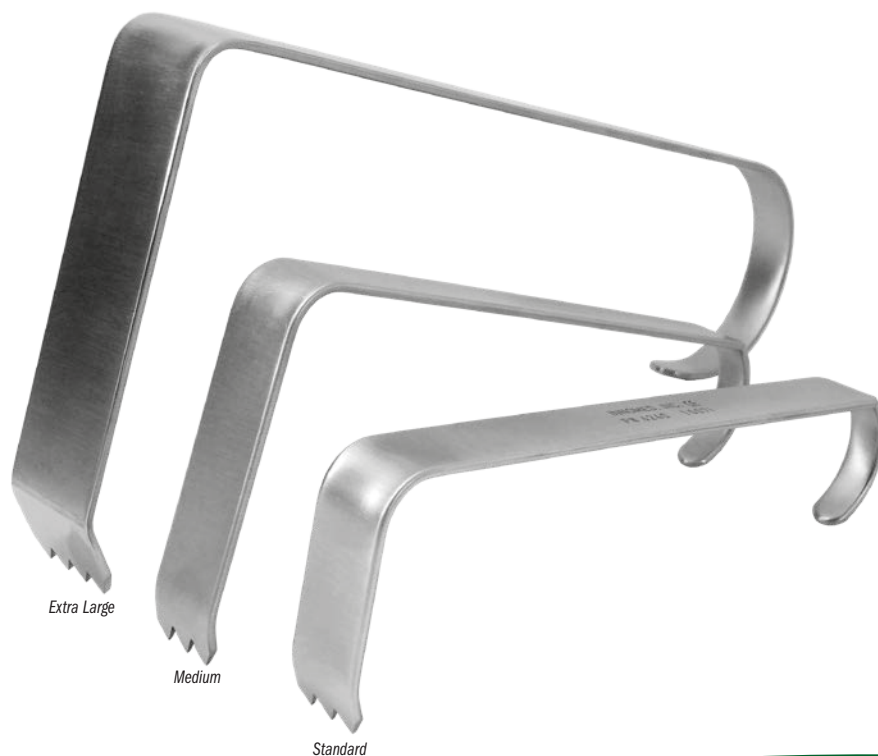

Extra Large

Medium

Standard

Hibbs Retractors

Designed for soft tissue retraction by either the toothed end or curved handle end

Extra large used in large patients when more leverage and depth is needed.

PRODUCT NO'S:

6230 [Extra Large]
Overall Length: 14.25" (36,2 cm)
Handle Length: 13" (33 cm)
Blade Depth: 6.5" (16,5 cm)
Blade Width: 38 mm

6235 [Medium]
Overall Length: 10.75" (27,3 cm)
Handle Length: 9.75" (24,8 cm)
Blade Depth: 4.5" (11,4 cm)
Blade Width: 25 mm

6240 [Standard]
Overall Length: 8.75" (22,5 cm)
Handle Length: 8" (20,3 cm)
Blade Depth: 3" (7,6 cm)
Blade Width: 25 mm



Retractors for Hip Surgery

For general use in hip surgery and minimally invasive hip surgery



A Single Prong Double Bent Hohmann Acetabular Retractor

PRODUCT NO'S:

6210 [Single Prong Double Bent Hohmann Acetabular Retractor 2.5" Blade]

Overall Length: 10.5" (26,7 cm)
Blade + Tip Length: 2.5" (6,4 cm)
Blade Width: 15 mm

6212 [Single Prong Double Bent Hohmann Acetabular Retractor 3.5" Blade]

Overall Length: 11.25" (28,6 cm)
Blade + Tip Length: 3.5" (8,9 cm)
Blade Width: 15 mm

A Single & Double Prong Double Bent Hohmann Acetabular Retractor - Long

Non-Slip Tip design modification by Alfred A. Durham, MD

PRODUCT NO'S:

6210-02 [Single Prong Double Bent Hohmann Acetabular Retractor - Long 3" Blade]

Overall Length: 12.5" (31,8 cm)
Blade + Tip Length: 3" (7,6 cm)
Blade Width: 15 mm

6210-02L-01 [Lighted Single Prong Std. Blade]

Overall Length: 12.5" (31,8 cm)
Blade + Tip Length: 3" (7,6 cm)
Blade Width: 15 mm

6211 [Single Prong Standard Blade Long with Extra Grip Tip]

Overall Length: 12.5" (31,8 cm)
Blade + Tip Length: 3" (7,6 cm)
Blade Width: 15 mm

6213 [Single Prong Double Bent Hohmann Acetabular Retractor - Long 5" Blade]

Overall Length: 15" (38,1 cm)
Blade + Tip Length: 5" (12,7 cm)
Blade Width: 15 mm

6220 [Double Prong Double Bent Hohmann Acetabular Retractor - Long]

Overall Length: 12.5" (31,8 cm)
Blade + Tip Length: 3" (7,6 cm)
Blade Width: 15 mm

Lighted retractor comes with one (1) Disposable LED Light Source, and can also be attached to a fiber optic light cable with ACM1 (female) connector.

A Single Prong Double Bent Hohmann Acetabular Retractor - Extra Long


PRODUCT NO'S:

6210-04 [Single Prong Double Bent Hohmann Acetabular Retractor - X Long 3" Blade]

Overall Length: 16.25" (41,3 cm)
Blade + Tip Length: 3" (7,6 cm)
Blade Width: 15 mm

6214 [Single Prong Double Bent Hohmann Acetabular Retractor - X Long 5" Blade]


Overall Length: 18" (45,7 cm)
Blade + Tip Length: 5" (12,7 cm)
Blade Width: 15 mm

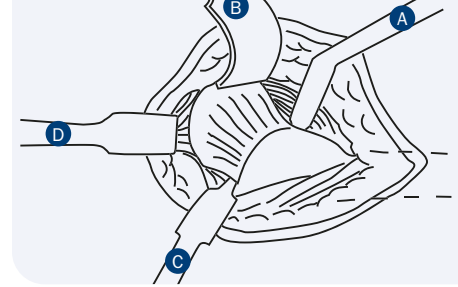

A Single Prong Double Bent Hohmann Acetabular Retractor



A Single & Double Prong Double Bent Hohmann Acetabular Retractor - Long

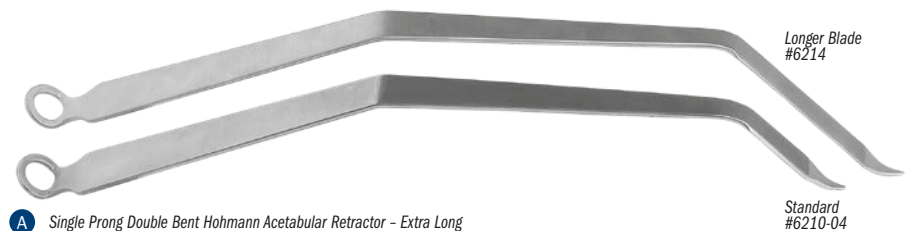

A Single Prong Double Bent Hohmann Acetabular Retractor - Extra Long

Short Tip Acetabular Retractor

Designed for retraction around the acetabulum

PRODUCT NO:

C1014

Overall Length: 13.25" (33,7 cm)
Blade Depth: 4.5" (11,4 cm)
Blade Width: 1" (2,54 cm)



Retractors for Hip Surgery

For general use in hip surgery and minimally invasive hip surgery



B Single Prong Broad Acetabular Retractor

Single Prong Broad
#6320



C Double Prong Broad Acetabular Retractor

Double Prong Broad
#6160



Standard
#6450



Standard with Short Tip
#6450-03



Extra Deep
#6450-01




Extra Deep with Short Tip
#6450-04



Straight Tip
#6450-02


C Single Prong Soft Tissue Retractors

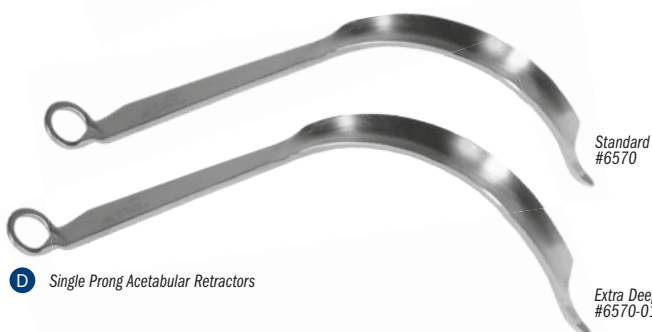

D Single Prong Acetabular Retractors

Standard
#6570

Extra Deep
#6570-01

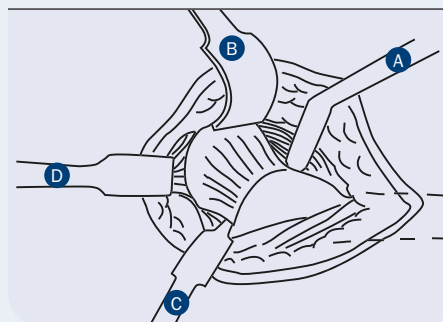

B Broad Acetabular Retractor

PRODUCT NO'S:

6320 [Single Prong Broad Acetabular Retr.]
Overall Length: 12" (30,5 cm)
Blade Width: 40 mm

6160 [Double Prong Broad Acetabular Retr.]
Overall Length: 12.5" (31,8 cm)
Blade Width: 40 mm

C Single Prong Soft Tissue Retractors

PRODUCT NO'S:

6450 [Single Prong Soft Tissue Retractor]
Overall Length: 12.125" (30,8 cm)
Blade Width: 22.3 mm

6450-03 [Standard with Short Tip]
Overall Length: 11.75" (29,8 cm)
Blade Width: 22.3 mm

New!

6450-01 [Extra Deep Single Prong Soft
Tissue Retractor]
Overall Length: 13.75" (34,9 cm)
Blade Width: 22.3 mm

6450-04 [Extra Deep w/Short Tip]
Overall Length: 13" (33 cm)
Blade Width: 22.3 mm

New!

6450-02 [Single Prong Soft Tissue Retractor
with Straight Tip]
Overall Length: 12.125" (30,8 cm)
Blade Width: 22.3 mm

D Single Prong Acetabular Retractor

PRODUCT NO'S:

6570 [Single Prong Acetabular Retractor]
Overall Length: 12.125" (30,8 cm)
Blade Width: 22.3 mm

6570-01 [Extra Deep Single Prong
Acetabular Retractor]
Overall Length: 13.75" (34,9 cm)
Blade Width: 22.3 mm

Inferior Acetabular Retractors

Help provide better access to the intramedullary canal

PRODUCT NO'S:

6250 [Standard]

Overall Length: 12" (30,5 cm)

Handle Length: 8" (20,3 cm)

Blade Height Above Prongs: 3" (7,6 cm)

Blade Width: 51 mm

Prong Width: 5.1 mm | 9.7 mm Gap | 5.1 mm

6255 [Narrow]

Overall Length: 12" (30,5 cm)

Handle Length: 8" (20,3 cm)

Blade Height Above Prongs: 3.25" (8,3 cm)

Blade Width: 32 mm

Prong Width: 5.1 mm | 9.7 mm Gap | 5.1 mm



Standard

Narrow

MIS Hip Retractor

PRODUCT NO'S:

6265

Overall Length: 15" (38,1 cm)

Handle Length: 11" (27,9 cm)

Depth from Bend: 8" (20,3 cm)

Blade Width: 20 mm



APC Hip Retractor Series

Used to help provide wide exposure of the acetabulum

PRODUCT NO'S:

6420 [Single Prong]

Overall Length: 14" (35,6 cm)


Blade Width: 22 mm

6430 [Double Prong Standard]

Overall Length: 14" (35,6 cm)

Blade Width: 24 mm

Designed by APC, Inc.

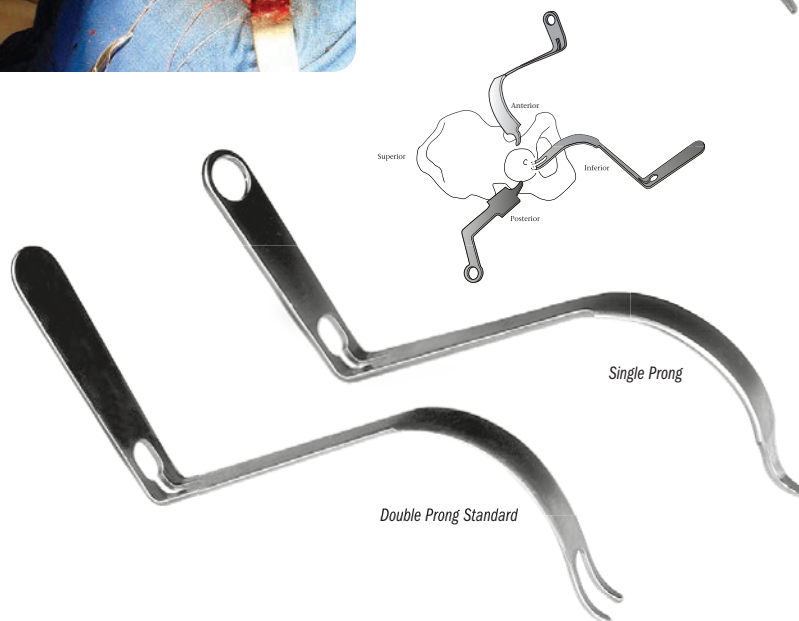

Single Prong

Double Prong Standard

Modified Double Prong Acetabular Retractor with Center Prongs

Retracts the femur anteriorly during total hip arthroplasty

Designed to retract the femur anteriorly during total hip arthroplasty. It is hooked over the anterior pelvic brim.

Weights can be added to assist in exposure and to help hold the retractor in place.



PRODUCT NO'S:

6170 [Standard]


Blade Width: 44 mm

Overall Length: 12.5" (31,8 cm)

6175 [Narrow]


Blade Width: 32 mm

Overall Length: 12.5" (31,8 cm)

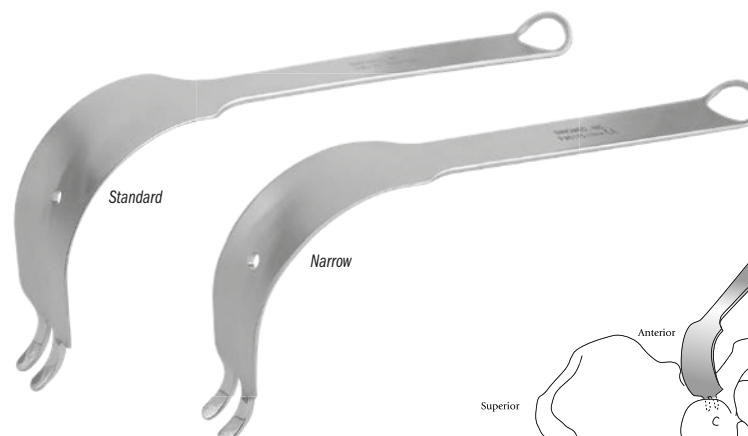

Standard

Narrow

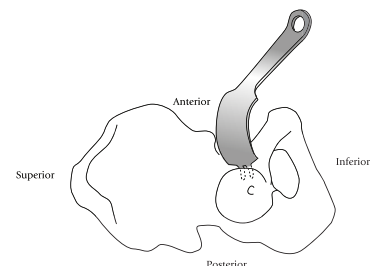



Dorr Curved Hohmann Acetabular Retractor

Placed over the top of the piriformis, helps retract the gluteus medius.

Dorr Narrow Bent Acetabular Retractors

Retracts the gluteus maximus off the trochanter and exposes the back of the greater trochanter. The long version is used with larger patients.

Dorr Bent Hohmann Acetabular Retractor

Placed between the capsule and outer external oblique muscle to protect medial circumflex vessels. The tip engages the condyloid notch bone (teardrop). Helps retract soft tissues during acetabular exposure.




Dorr Curved Blade Bent Hohmann Retractors

Used for both femoral and acetabular exposure. For femoral exposure, the retractor is placed underneath and around the femoral neck to lift and open up the femoral head before cutting it off. The retractor is then moved to the posterior superior corner of the acetabulum where the sharp tip can be tapped into the bone—this is also the position used during acetabular exposure.

Upward Double Bent Hohmann Retractor

Tapped into the ilium to help retract the femur for acetabular exposure.

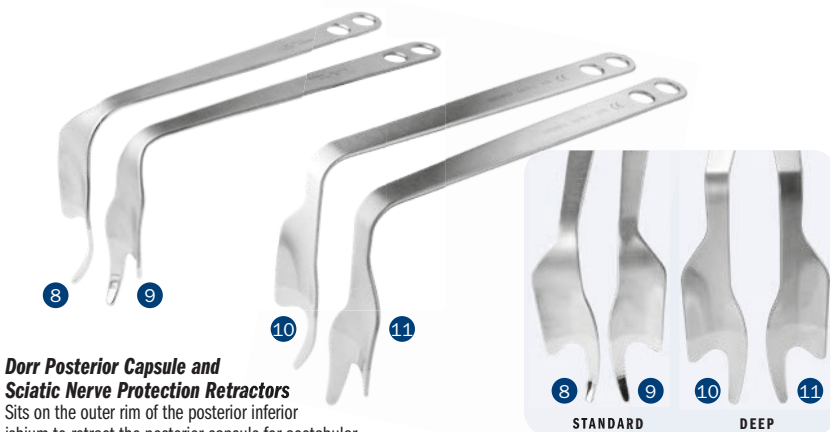

Dorr Posterior Capsule and Sciatic Nerve Protection Retractors

Sits on the outer rim of the posterior inferior ilium to retract the posterior capsule for acetabular exposure and help to protect the sciatic nerve.



Dorr Femoral Neck Elevators

Placed under the proximal femur to help expose the femoral head. The wide version is useful with large patients, while the narrow is useful when broaching or when the implant is in place.



Dorr Hip Instruments

Designed by Lawrence D. Dorr, MD



PRODUCT NO'S:

D6105 [Curved Hohmann Acetabular]

Overall Length: 14" (35,6 cm)
Depth from Handle: 4.5" (11,4 cm)
Blade Width: 18.5 mm

D6108 [Narrow Bent Acetabular—Long]

Overall Length: 14.75" (37,5 cm)
Depth from Handle: 6" (15,2 cm)
Blade Width: 12.6 mm

D6110 [Narrow Bent Acetabular]

Overall Length: 15" (38,1 cm)
Depth from Handle: 4.75" (12,1 cm)
Blade Width at Widest: 12 mm

D6112 [Bent Hohmann Acetabular]

Overall Length: 14.5" (36,9 cm)
Depth from Handle: 6" (15,2 cm)
Blade Width: 21 mm

PRODUCT NO'S:

D6106 [Curved Blade Bent Hohmann]

Overall Length: 13.5" (34,3 cm)
Depth from Handle: 4.5" (11,4 cm)
Blade Width: 40 mm

D6107 [Curved Blade Double Bent Hohmann]

Overall Length: 8.5" (21,6 cm)
Depth from Handle: 5" (12,7 cm)
Blade Width: 25 mm

D6114 [Upward Double Bent Hohmann]

Overall Length: 14" (35,6 cm)
Depth from Flat Part of Handle: 5.5" (14 cm)
Blade Width: 20.5 mm

PRODUCT NO'S:

D6109-L [Posterior Capsular Retractor—Left]

Overall Length: 14" (35,6 cm)
Depth from Handle: 6" (15,2 cm)
Blade Width at Widest: 44 mm

D6109-R [Posterior Capsular Retractor—Right]

Overall Length: 14" (35,6 cm)
Depth from Handle: 6" (15,2 cm)
Blade Width at Widest: 44 mm

D6115-L [DEEP Posterior Capsular Retractor—Left]

Overall Length: 14.75" (37,5 cm)
Depth from Handle: 7.25" (18,4 cm)
Blade Width at Widest: 48 mm

D6115-R [DEEP Posterior Capsular Retractor—Right]

Overall Length: 14.75" (37,5 cm)
Depth from Handle: 7.25" (18,4 cm)
Blade Width at Widest: 48 mm

PRODUCT NO'S:

D6111 [Wide Femoral Neck Elevator]

Overall Length: 15" (38,1 cm)
Depth from Handle: 2" (5,1 cm)
Blade Width at Widest: 45 mm

D6113 [Narrow Femoral Neck Elevator]

Overall Length: 13.75" (34,9 cm)
Depth from Handle: 2.25" (5,7 cm)
Blade Width: 25 mm

Narrow Cobra-style Retractor with Large Handle

Designed for use around the femur and acetabulum

PRODUCT NO:

C1005

Overall Length: 17.5" (34,5 cm)
Depth from handle: 7" (17,8 cm)



New!

Modified Curved Double Bent Hohmann Retractor

A modified, double-bent Hohmann designed to be placed on the anterior wall of the acetabulum

Double-bent angle allows for safe retraction of the reflected head of the rectus femoris, reducing concerns of over-retraction.

PRODUCT NO:

D6107-MOD

Overall Length: 8.5" (21,6 cm)
Depth from Handle: 4.5" (11,4)
Blade Width: 27.4 mm



Designed by Lawrence Dorr, MD. Design modification by Bertrand P Kaper, MD

Taylor Retractors

PRODUCT NO'S:

6330-01 [Standard]

Overall Length: 8" (20,3 cm)
Depth from Bend: 4" (10,2 cm)
Blade Width: 32 mm

6330-02 [Deep]

Overall Length: 9" (23 cm)
Depth from Bend: 5.5" (14 cm)
Blade Width: 32 mm

6330-03 [Deep with Pin Guides]

Overall Length: 9" (23 cm)
Depth from Bend: 5.5" (14 cm)
Blade Width: 32 mm
Guide for Pins Up To: .125" (3,2 mm)



Modified Cobra Retractor

A general purpose instrument for use around the femur and acetabulum

PRODUCT NO:

C1012

Overall Length: 14.5" (36,9 cm)

Blade Depth: 5.25" (13,3 cm)



Blade Width: 1" (2,54 cm)



New!



POSTERIOR APPROACH: Placed over the anterior acetabular wall for supero-anterior translation of the femoral head and neck during acetabular preparation. The prong(s) pierce the capsule over the anterior wall, then the curve and "twist" of the retractor allows for gentle retraction on the femoral neck.

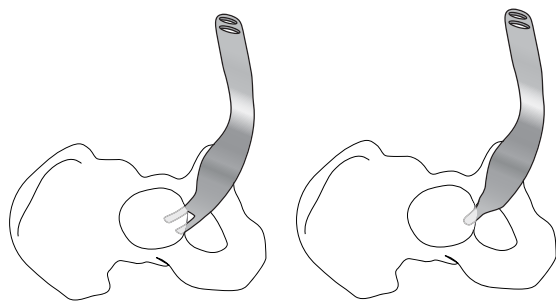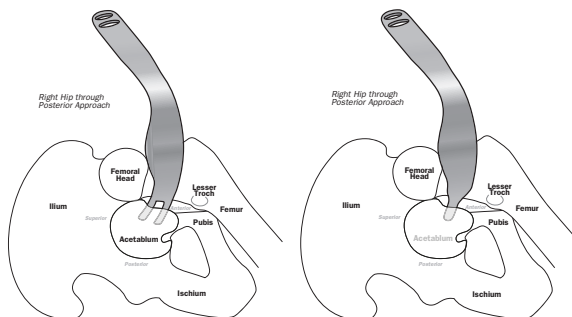

ANTERIOR APPROACH: Placed inferior to the trans-acetabular ligament during exposure and preparation of the acetabular component. The curve and "twist" of the retractor allow for gentle retraction of the medial and inferior soft tissues and skin. Helps provide easier retraction for the assistant on the other side of the operating table.

Flared Cobra Retractors

Left and right retractors can be used with the anterior, posterior or lateral approach to help expose the acetabulum in total hip surgery



PRODUCT NO'S:

6110-01 [Double Prong – Right]

Overall Length: 15" (38 cm)

6110-02 [Double Prong – Left]

Overall Length: 15" (38 cm)

6109-L [Single Prong – Left]

Overall Length: 15" (38 cm)

6109-R [Single Prong – Right]

Overall Length: 15" (38 cm)



Designed by Henry Boucher, MD
Single prong design modification by Walter Frueth, MD


Cobra Retractors

A general purpose instrument for use around the femur and acetabulum

The OrthoLucent™ version is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

The lighted retractor comes with one (1) Disposable LED Light Source (#8010-01). Can also attached to a fiber optic light cable with ACMI (female) connector. Retractor can be steam sterilized.

PRODUCT NO'S:
6129 [Standard w/Sharp Tip] Overall Length: 12" (30,5 cm) Handle Length: 7" (17,8 cm) Blade at Widest: 33 mm
6130 [Standard] Overall Length: 12" (30,5 cm) Handle Length: 7" (17,8 cm) Blade at Widest: 33 mm
6130-H [Standard with Ergonomic Handle] Overall Length: 12" (30,5 cm) Ergonomic Handle Length: 5" (12,7 cm) Blade at Widest: 33 mm
6130-L-01 [Lighted Standard] Overall Length: 12" (30,5 cm) Handle Length: 7" (17,8 cm) Blade Width at Widest: 33 mm
6130-R* [OrthoLucent™ Standard] Overall Length: 12" (30,5 cm) Handle Length: 7" (17,8 cm) Blade Width at Widest: 33 mm
6132 [Medium] Overall Length: 12" (30,5 cm) Handle Length: 7" (17,8 cm) Blade at Widest: 46 mm
6140 [Wide] Overall Length: 11.75" (29,8 cm) Handle Length: 7" (17,8 cm) Blade at Widest: 56 mm

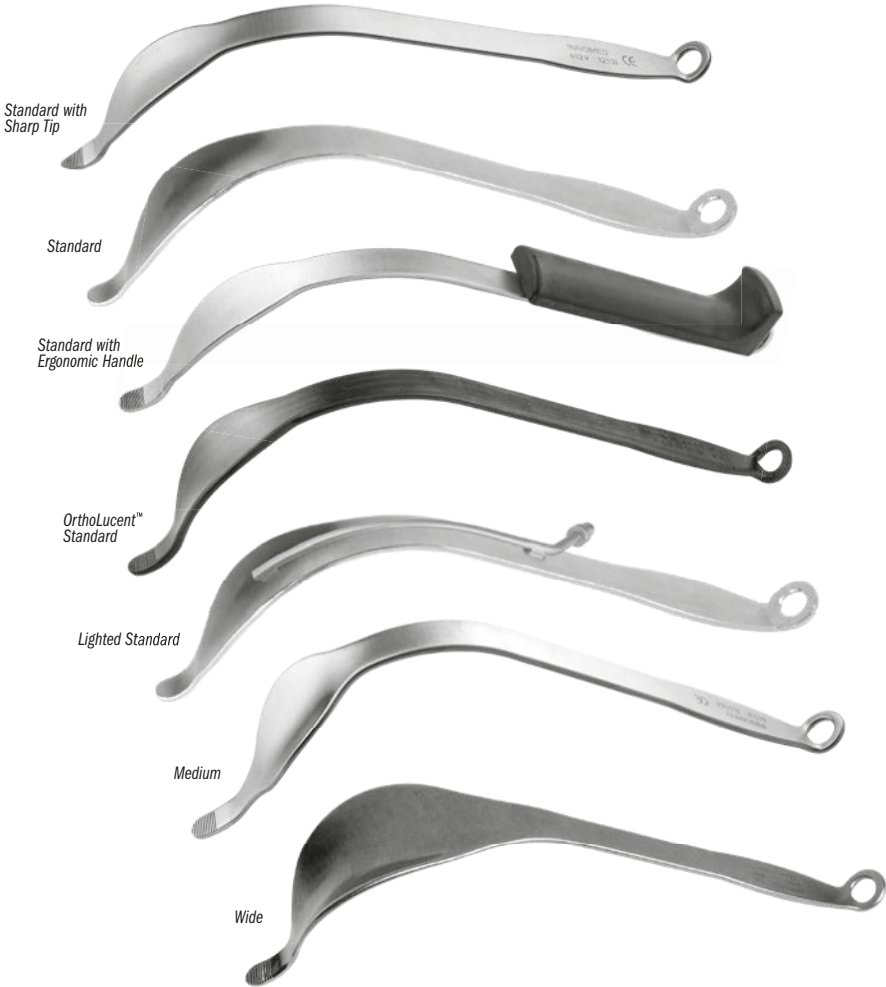

Deep Cobra Retractors

A general purpose instrument for use around the femur and acetabulum in larger patients

Lighted retractor comes with one (1) Disposable LED Light Source (#8010-01). Can also attached to a fiber optic light cable with ACMI (female) connector. Retractor can be steam sterilized.

PRODUCT NO'S:
6135 [Deep] Overall Length: 14.5" (36,9 cm) Handle Length: 7" (17,8 cm) Blade Width at Widest: 33 mm
6135-L-01 [Lighted Deep] Overall Length: 14.5" (36,9 cm) Handle Length: 7" (17,8 cm) Blade Width at Widest: 33 mm



Jana Lighted Cobra Retractor

Designed to enhance exposure & visualization

Comes with one (1) Disposable LED Light Source (#8010-01). Can also be attached to a fiber optic light cable with ACMI (female) connector. Retractor can be steam sterilized.

PRODUCT NO:
6119-L-01 Overall Length: 14.75" (37,5 cm) Blade at Widest: 33 mm

Designed by Ajoy K. Jana, MD





Light Source Cable Adapters



PRODUCT NO'S:

8009-S [ACMI to Storz Adapter]
8009-W [ACMI to Wolf Adapter]

Narrow Cobra Retractors

A general purpose instrument for use around the femur and acetabulum in MIS surgery

PRODUCT NO'S:

6120-04 [XL Narrow]
Overall Length: 15.5" (39,4 cm)
Handle Length: 11" (27,9 cm)
Blade Width: 19 mm

6120 [Narrow]
Overall Length: 11.75" (29,8 cm)
Handle Length: 6.5" (16,5 cm)
Blade Width: 19 mm



Lighted Cobra Retractors

Lighting attachment for enhanced visual exposure


Lighted retractors come with one (1) Disposable LED Light Source (#8010-01). Can also be attached to a fiber optic light cable with ACMI (female) connector. Retractors can be steam sterilized.

PRODUCT NO'S:

6120-L-01 [Lighted Narrow Cobra]
Overall Length: 11.75" (29,8 cm)
Handle Length: 6.5" (16,5 cm)
Blade Width: 19 mm

6130-L-01 [Lighted Standard Cobra]
Overall Length: 12" (30,5 cm)
Handle Length: 7" (17,8 cm)
Blade Width at Widest: 33 mm

6135-L-01 [Lighted Deep Cobra]
Overall Length: 14.5" (36,9 cm)
Handle Length: 7" (17,8 cm)
Blade Width at Widest: 33 mm

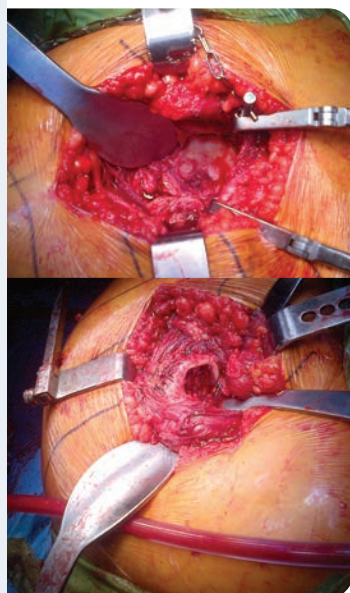

Harwin Modified Cobra Retractor

Designed for use during total hip and knee surgery

The long handle and obtuse angle provide ergonomic leverage—especially helpful for use with obese patients.

In total hip surgery, the wide, concave blade design allows for enhanced exposure—especially useful in anterior hip surgery with the placement of reamers, and to elevate and expose the proximal femur.

In total knee surgery, the wide blade of the large retractor spans the prepared box and helps bring the tibia forward. The small retractor helps with retraction of the medial and lateral structures, where the wide, concave blade provides added exposure over standard bent Hohmann retractors. The serrated tip helps improve stability.

Designed by Steven F. Harwin, MD, FACS

PRODUCT NO'S:

6143 [Large]
Overall Length: 14.75" (37,5 cm)
Blade Width: 43.2 mm
Tongue: 25 mm x 5 mm

6143-01 [Small]
Overall Length: 12.5" (31,8 cm)
Blade Width: 30 mm
Tongue: 25 mm x 5 mm



Infero-Posterior Acetabular Retractor with Modular Handle – Left and Right

Designed to be placed with the point at 6 o' clock and the retractor's axilla resting on the ischium, while the wing blade is used to retract the remaining capsule from the posterior lip of the acetabulum, and the optional screw-in modular handle can be used for additional leverage and maneuverability

PRODUCT NO'S:

C1007-H-00 [Left Set]

Set Includes/ Available Separately:

C1007 [Left Retractor Only]

Overall Length: 14" (35,6 cm)

Depth from Bend: 4.5" (11,4 cm)

Fixed Handle Width: 5.5" (14 cm)

C1006 [Modular Handle]

Overall Length: 4.875" (12,4 cm)

Handle Length: 4.5" (11,4 cm)



PRODUCT NO'S:

C1008-H-00 [Right Set]

Set Includes/ Available Separately:

C1008 [Right Retractor Only]

Overall Length: 14" (35,6 cm)

Depth from Bend: 4.5" (11,4 cm)

Fixed Handle Width: 5.5" (14 cm)

C1006 [Modular Handle]

Overall Length: 4.875" (12,4 cm)

Handle Length: 4.5" (11,4 cm)



Posterior-Inferior Retractors

Designed for Total Hip Surgery

The posterior-inferior retractor is placed with the point at 6 o' clock and the retractor's axilla resting on the ischium. The remaining blade of this retractor is used to retract the remaining capsule from the posterior lip of the acetabulum.

PRODUCT NO'S:

7625-01 [Small Right]

Overall Length: 10.75" (27,3 cm)

Handle-to-Bend Length: 5.5" (14 cm)

7625-02 [Small Left]

Overall Length: 10.75" (27,3 cm)

Handle-to-Bend Length: 5.5" (14 cm)

7925-01 [Medium Right]

Overall Length: 11" (27,9 cm)

Handle-to-Bend Length: 7" (17,8 cm)

7925-02 [Medium Left]

Overall Length: 11" (27,9 cm)

Handle-to-Bend Length: 7" (17,8 cm)

7620-01 [Large Right]

Overall Length: 12" (30,5 cm)

Handle-to-Bend Length: 6" (15,2 cm)

7620-02 [Large Left]

Overall Length: 12" (30,5 cm)

Handle-to-Bend Length: 6" (15,2 cm)

Designed by
Wayne M. Goldstein, MD




Small



Medium



Large

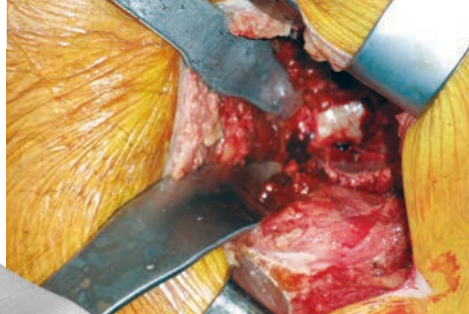

Moran Posterior-Inferior Retractor



Designed to achieve a stable position on the pelvis and expose the posterior-inferior aspect of the acetabulum

The short sharp tip is placed into the ischial sulcus behind the posterior acetabular rim. The long dull tip comes to rest behind the teardrop, while the retractor handle projects in a posterior-inferior direction.

PRODUCT NO'S:

6415-L [Left]
Overall Length: 12.5" (31,8 cm)
6415-R [Right]
Overall Length: 12.5" (31,8 cm)

Designed by Michael C. Moran, MD

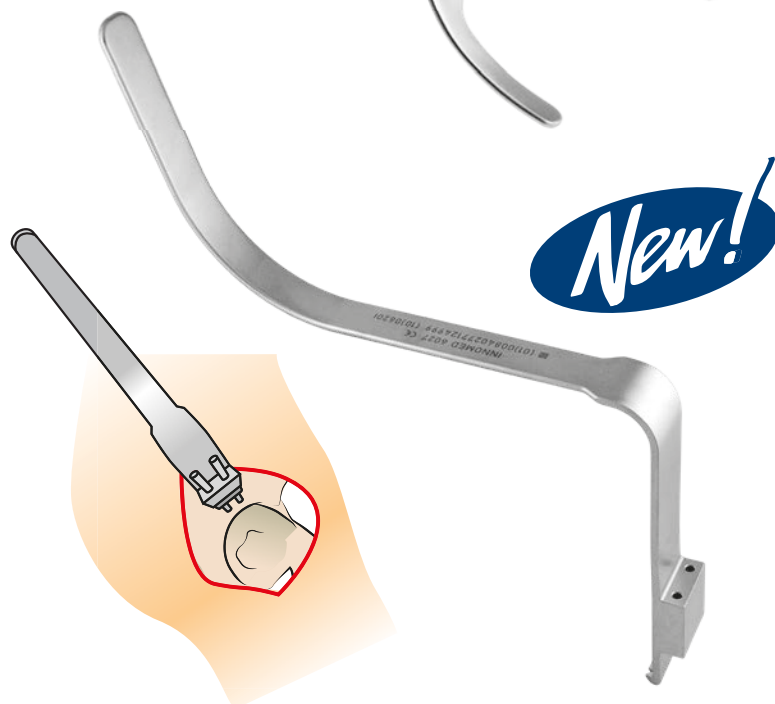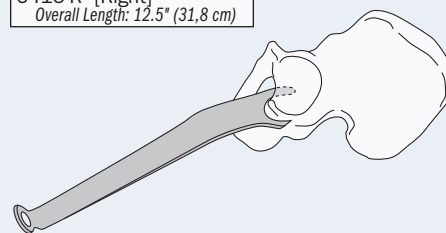


Superior Retractor

Used for retraction around the acetabulum, can be self retaining with the use of 1/8" (3.2 mm) pins

PRODUCT NO:

6027
Overall Length: 12.75 (32,4 cm)
Depth from Bend: 5.5" (14 cm)
Blade Width: 1" (25,4 mm)
Holes for Pins Up to: 1/8" (3,2 mm)

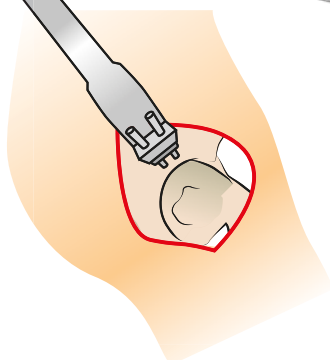

Penenberg Gluteus Retractors

PRODUCT NO'S:

7108-01 [Right]
Overall Length: 8.25" (21 cm)
Handle to Bend Length: 6.5" (16,5 cm)
Depth from Bend: 4.25" (10,8 cm)
7108-02 [Left]
Overall Length: 8.25" (21 cm)
Handle to Bend Length: 6.5" (16,5 cm)
Depth from Bend: 4.25" (10,8 cm)

Designed by
Brad Penenberg, MD



Minimal Incision Total Hip Retractors

Designed for Minimal Incision Total Hip Surgery using the standard posterior lateral approach


Used in conjunction with a frame and blade system (SEE PAGE 32).

PRODUCT NO'S:

- | | |
|----|--|
| 1 | 7110 [Bent Hohmann Retractor for Gluteus Medius – Standard]
Overall Length: 9.75" (24,8 cm)
Blade Width: 19 mm
Depth from Bend: 4.25" (10,8 cm) |
| 1e | 7111 [Bent Hohmann Retractor for Gluteus Medius – With Extra Grip Tip]
Overall Length: 9.75" (23,8 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 19 mm
Depth from Bend: 4.25" (10,8 cm) |
| 2 | 7110-01 [Bent Hohmann Retractor for Gluteus Medius – Extra Long Handle]
Overall Length: 11.5" (29,2 cm)
Blade Width: 19 mm
Depth from Bend: 4.25" (10,8 cm) |
| 3 | 7120 [Blunt Right Angle Posterior Capsular Retractor]
Overall Length: 8" (20,3 cm)
Blade Width: 32 mm
Blade Depth: 3.25" (8,9 cm) |
| 4 | 7130 [Cobra Retractor with Hand Rest]
Overall Length: 10.25" (26 cm)
Blade Width at Widest: 32 mm |
| 5 | 7140 [Superior Capsular Retractor]
Overall Length: 9.375" (23,8 cm)
Blade Width at Widest: 19 mm |
| 6 | 7180 [Right Angle Posterior Capsular Retractor]
Overall Length: 8" (20,3 cm)
Blade Width: 32 mm
Blade Depth: 3.5" (8,9 cm) |
| 7 | 7180-01 [Right Angle Posterior Capsular Retractor without Teeth]
Overall Length: 8" (20,3 cm)
Blade Width: 32 mm
Blade Depth: 3.5" (8,9 cm)* |

Designed By Wayne M. Goldstein, MD

Surgical technique available on our website.

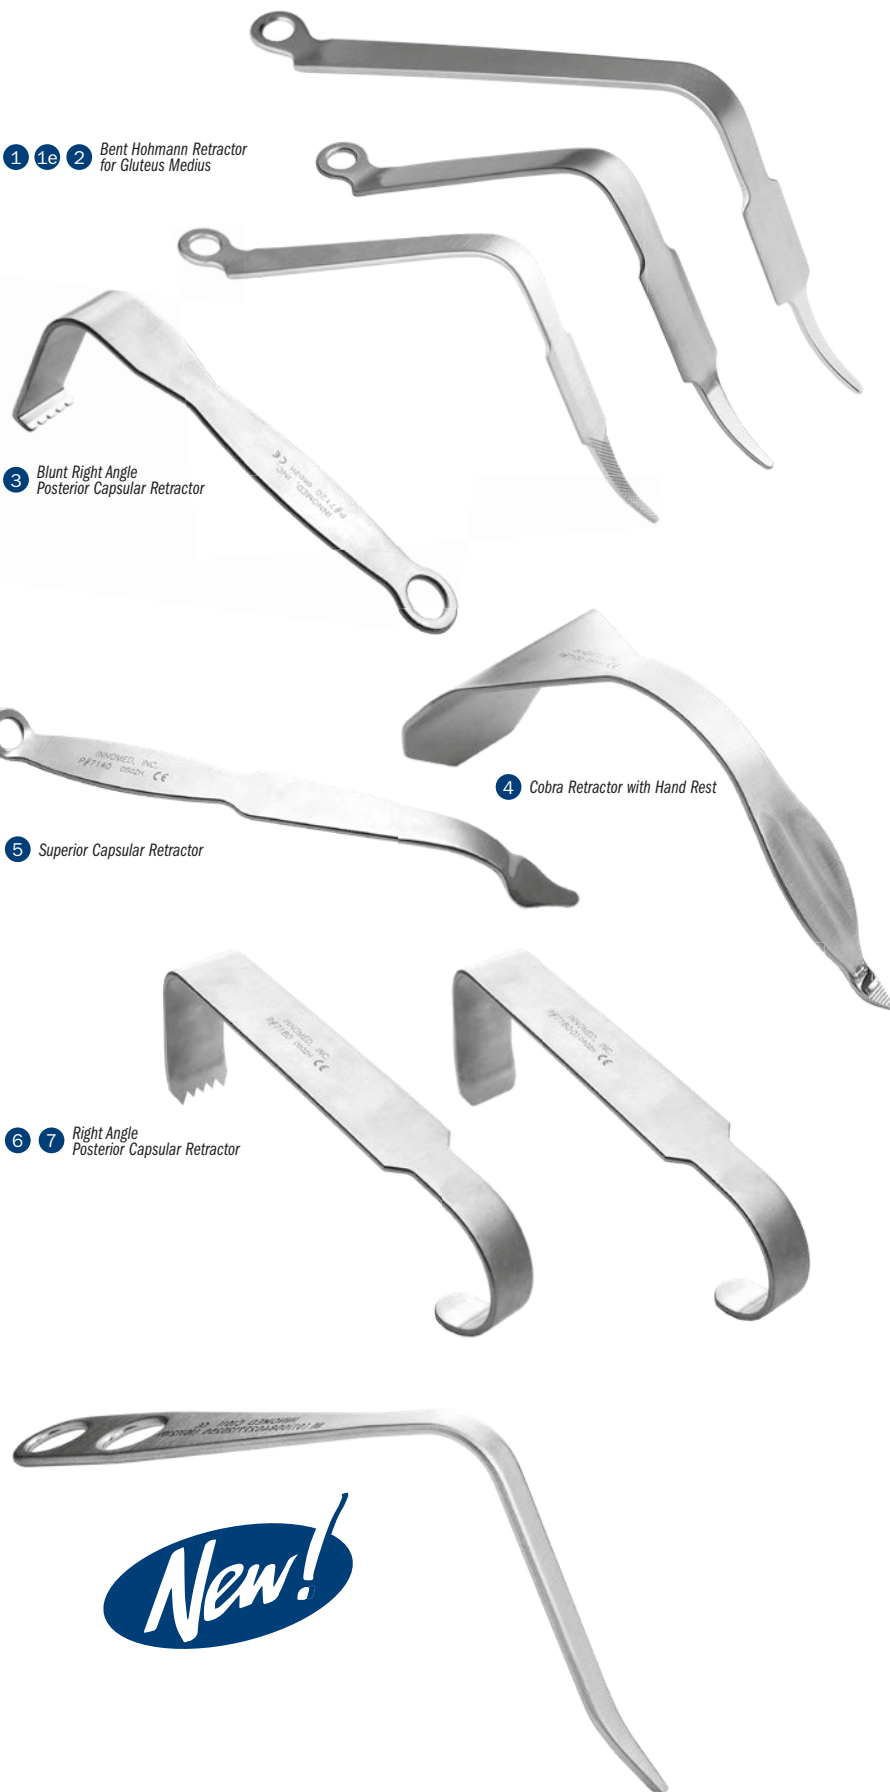

Narrow Right Angle Retractor

Designed for soft tissue retraction

PRODUCT NO:

C1011
Overall Length: 8.5" (21,6 cm)
Handle Length: 6.75" (17,1 cm)
Blade Depth: 4.5" (11,4 cm)
Blade Width: .375" (1 cm)



Minimally Invasive Hip Surgery Retractors

Designed to be used in various minimally invasive hip exposures



PRODUCT NO'S:

1	S3023 [MIH Hip Retractor] Overall Length: 13" (33 cm) Blade Width: 25 mm
2	S3024 [MIH Hip Retractor-blunt tip] Overall Length: 14.5" (36,9 cm) Blade Width: 25 mm
3	S3025 [MIH Offset Retractor] Overall Length: 14" (35,6 cm) Blade Width: 32 mm
4	S3026 [MIH Long Hohmann Retractor] Overall Length: 14.75" (37,5 cm) Blade Width: 40 mm
5	S3027 [MIH Long Hohmann Retractor] -curved, short blade Overall Length: 12.25" (31,1 cm) Blade Width: 34 mm
6	S3028 [MIH Long Hohmann Retractor] -curved, long blade Overall Length: 14" (35,6 cm) Blade Width: 39 mm
7	S3029 [MIH Long Hohmann Retractor-narrow] Overall Length: 14.75" (37,5 cm) Blade Width: 22 mm
7s	S3029-01 [MIH Long Hohmann Retractor - narrow with short tip] New! Overall Length: 14.5" (36,9 cm) Blade Width: 22 mm
8	S3030 [MIH Small Hohmann Retractor] Overall Length: 11.5" (29,2 cm) Blade Width: 19 mm

Modular Weights

Used to help hold retractors in place



PRODUCT NO'S:

3430-01	1.5 lbs. (.68 kg)
3430-02	2.0 lbs. (.91 kg)
3430-03	2.5 lbs. (1.13 kg) with attaching hook



Retractors with Extra Grip Tip

Helps to stabilize the retractor around the bone

PRODUCT NO'S:

6211 [Single Prong Acetabular]
Overall Length: 12.5" (31,8 cm)
Blade + Tip Length: 3" (76 mm)
Blade Width: 15 mm
7111 [Bent Hohmann Narrow]
Overall Length: 9.75" (23,8 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 19 mm
Depth from Bend: 4.25" (10,8 cm)



Extra Grip Tip design modification by Alfred A. Durham, MD



1 MIH Hip Retractor

2 MIH Hip Retractor-blunt tip

3 MIH Offset Retractor

4 MIH Long Hohmann Retractor

5 MIH Long Hohmann Retractor-curved, short blade

6 MIH Long Hohmann Retractor-curved, long blade

7 MIH Long Hohmann Retractor-narrow

7s MIH Long Hohmann Retractor-narrow with short tip **New!**

8 MIH Small Hohmann Retractor

Single Prong Double Bent Hohmann Acetabular Retractor - Long with Extra Grip Tip

Bent Hohmann Retractor-Narrow with Extra Grip Tip

Extra Grip Tip
Helps to stabilize the retractor around the bone

Bent Hohmann Retractors—Narrow


Helps retract tissues at the margins of the joint

Useful for retracting tissues at the margins of the joint. Can be passed over the margins of the joint and held in place with weights or by hand.

The OrthoLucent™ version is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

PRODUCT NO'S:
7110 [Standard] Overall Length: 9.75" (23,8 cm) Handle Length: 7" (17,8 cm) Blade Width: 19 mm Depth from Bend: 4.75" (12,1 cm)
7110-R* [OrthoLucent™ Narrow] Overall Length: 9.75" (23,8 cm) Handle Length: 7" (17,8 cm) Blade Width: 19 mm Depth from Bend: 4.75" (12,1 cm)
7110-O1 [Extra Long Handle] Overall Length: 11.5" (29,2 cm) Handle Length: 10" (25,4 cm) Blade Width: 19 mm Depth from Bend: 4.75" (12,1 cm)
7111 [With Extra Grip Tip] Overall Length: 9.75" (23,8 cm) Handle Length: 7" (17,8 cm) Blade Width: 19 mm Depth from Bend: 4.25" (10,8 cm)
7115 [Short-tipped Narrow] Overall Length: 8.625" (21,9 cm) Handle Length: 7" (17,8 cm) Blade Width: 19 mm Depth from Bend: 4.4" (11,2 cm)
7115-O1 [Short-tipped Extra Long Handle] Overall Length: 11" (27,9 cm) Handle Length: 10" (25,4 cm) Blade Width: 19 mm Depth from Bend: 4.25" (10,8 cm)
7115-O3 [Extra Deep] Overall Length: 12.125" (31,1 cm) Handle Length: 9.75" (24,8 cm) Depth from Bend: 6.25" (15,9 cm) Blade Width: 19 mm

Short-tipped designed by Carl DiRaimondo, MD
Extra Grip Tip design modification by Alfred A. Durham, MD

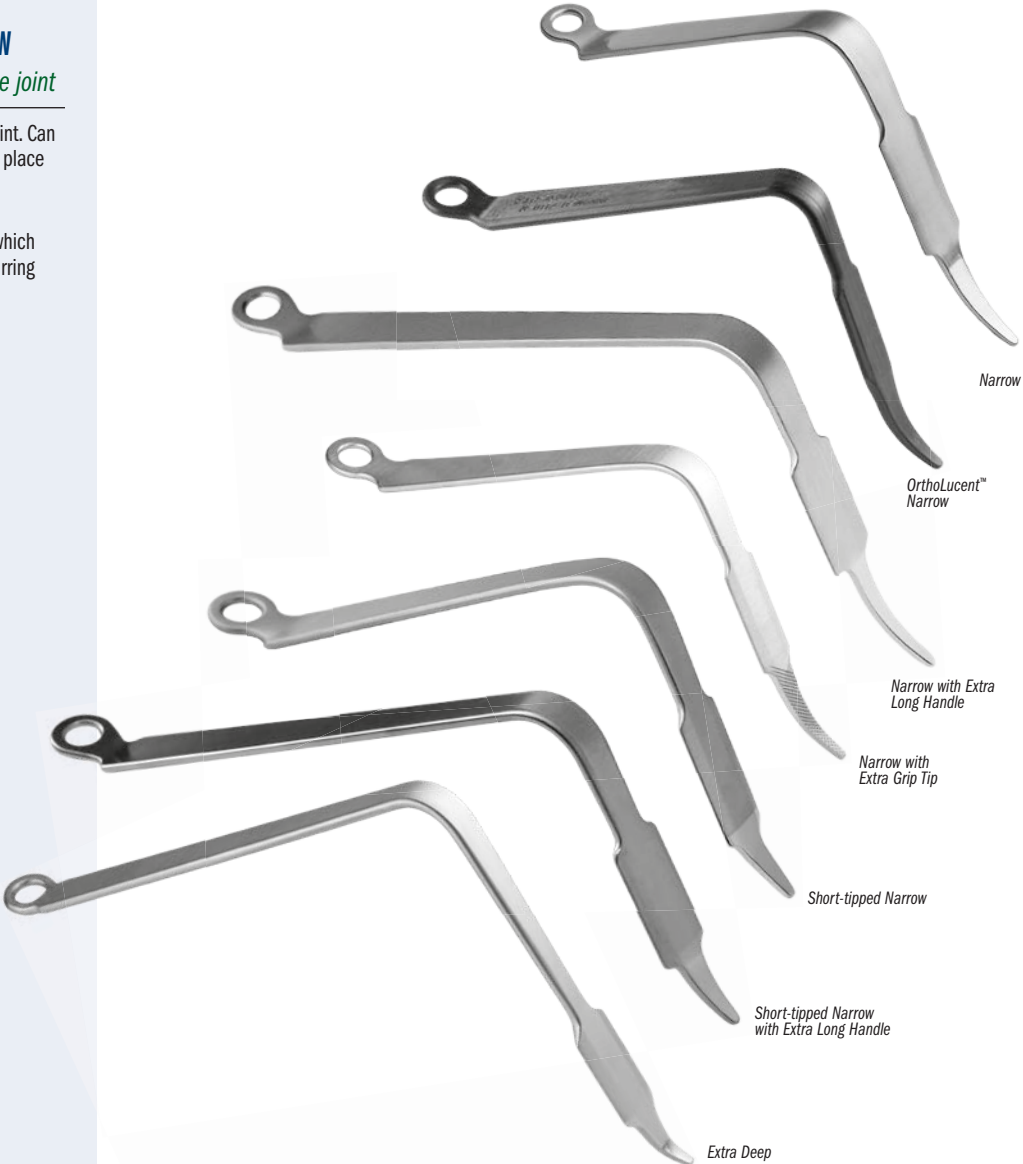

Narrow

OrthoLucent™ Narrow

Narrow with Extra Long Handle

Narrow with Extra Grip Tip

Short-tipped Narrow

Short-tipped Narrow with Extra Long Handle

Extra Deep

Bent Hohmann Retractors—Wide

Helps retract tissues at the margins of the joint

PRODUCT NO'S:
6590 [Standard] Overall Length: 9.375" (23,8 cm) Handle Length: 7" (17,8 cm) Blade Width: 41 mm Depth from Bend: 4.75" (12,1 cm)
6590-O1 [Extra Long Handle] Overall Length: 11" (27,9 cm) Handle Length: 9" (22,9 cm) Blade Width: 41 mm Depth from Bend: 5.5" (14 cm)



Wide

Wide with Extra Long Handle

Long Narrow Hohmann Retractor—Blunt

PRODUCT NO'S:
4540 [Standard] Blade Width: 22 mm Blade Width at End: 16 mm Overall Length: 11.375" (28,9 cm)
4540-O1 [Extra Deep] Blade Width: 22 mm Blade Width at End: 16 mm Overall Length: 13.25" (33,7 cm)



Modified Hohmann Retractors

Handle is contoured to allow better leverage and visualization

Useful for retracting tissues around the bone. Can be held in place with weights or by hand.

The OrthoLucent™ version is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

PRODUCT NO'S:	
4535 [Narrow]	Overall Length: 10" (25,4 cm) Blade Width: 14 mm
4535-R* [OrthoLucent™ Narrow]	Overall Length: 10" (25,4 cm) Blade Width: 18 mm
4535-01 [Extra Deep Narrow]	Overall Length: 11.625" (29,5 cm) Blade Width: 16.4 mm
4545 [Short-tipped Narrow]	Designed by Carl DiRaimondo, MD Overall Length: 9.5" (24,1 cm) Blade Width: 14 mm
6595 [Wide]	Overall Length: 10" (25,4 cm) Blade Width: 42.5 mm
6595-01 [Extra Deep Wide]	Overall Length: 11.5" (29,2 cm) Blade Width: 42.5 mm



Hohmann Retractor

Designed like the original Hohmann-style retractor — made in the U.S.A.

The OrthoLucent™ version is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

PRODUCT NO'S:	
4558 [Standard]	Blade Width: 16 mm Overall Length: 9.46" (24 cm)
4558-R* [OrthoLucent™]	Blade Width: 16 mm Overall Length: 9.46" (24 cm)
4558-01 [Extra Deep]	Blade Width: 16.7 mm Overall Length: 11.5" (29,2 cm)



Modified Blunt Hohmann Retractor

Used for soft tissue retraction

The OrthoLucent™ version is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

PRODUCT NO'S:	
4550 [Standard]	Blade Width at End: 11 mm Overall Length: 10.75" (27,3 cm)
4550-R* [OrthoLucent™]	Blade Width at Widest: 24.5 mm Overall Length: 10.75" (27,3 cm)
4550-01 [Extra Deep]	Blade Width at End: 11 mm Overall Length: 13.25" (33,7 cm)



Goytia Stackable Hohmann Retractors

Interlocking design helps to increase depth and leverage in hip exposure, particularly of the anterior acetabulum—especially useful with large patients

- ▶ Custom fitted holes for interlocking retractors helps provide stability
- ▶ When "stacked", the increased lever arm of the retractor helps reduce fatigue
- ▶ Ideal for use with large patients where extra depth, leverage and force is needed

PRODUCT NO'S:

4551 [Standard]
Overall Length: 9.25" (23,5 cm)
Blade Width: 19.5 mm

4552 [Bent]
Overall Length: 8.25" (21 cm)
Blade Width: 19.5 mm

4553 [Wide]
Overall Length: 9.25" (23,5 cm)
Blade Width: 43 mm

Designed by Robin N. Goytia, MD



Lombardi Femoral/Gluteus Medius Minimus Retractor

Designed for acetabular exposure, and to retract the gluteus medius minimus during femoral reaming

Placed at the level of the ischium and driven into the ischium to retract the femur posteriorly when using an anterolateral approach. Also using an anterolateral or a modified Harding approach, the retractor can be placed in the tip of the greater trochanter and can effectively retract the abductor mechanism, namely the gluteus medius minimus so that reaming of the femur can be performed.

PRODUCT NO:

4235
Overall Length: 11.75" (29,8 cm)
Blade Width: 20 mm

Designed by Adolph V. Lombardi Jr., MD



Wetzel Modified Hohmann Retractor

The long point is designed to be placed around, on, or through a bony structure and then levered back to retract tissue

The handle is contoured to allow better leverage and visualization. Can be held in place with weights or by hand.

PRODUCT NO:

4539
Overall Length: 10" (25,4 cm)
Blade Width: .85" (21,5 mm)



Designed by Robert Wetzel, MD and Todd McKinley, MD



Amstutz Femoral Retractor

Used for acetabular exposure

PRODUCT NO:

6410
Overall Length: 10.75" (27,3 cm)
Blade Width: 18 mm

Designed by Harlan C. Amstutz, MD





Deep Hohmann-style Retractors with Large Handle

Designed for retraction around the femur and acetabulum

PRODUCT NO:

C1009 [Standard]

Overall Length: 15.75" (40 cm)

Handle Length: 6.125" (15.6 cm)

Blade Depth: 4.5" (11.4 cm)

Blade Width: 1.1" (28 mm)

C1010 [90°]

Overall Length: 14.25" (36.2 cm)

Handle Length: 6.125" (15.6 cm)

Blade Depth: 5.25" (13.3 cm)

Blade Width: 1.1" (28 mm)



Whelan Narrow Hohmann Retractor

Retractor has gentle right angle curve with sharp tip, making it ideal for retraction of structures anterior to the acetabulum in the anterior approach to total hip

The large gentle curve allows visibility without undue pressure or traction on the femoral nerve or vessels.

PRODUCT NO:

7116

Overall Length: 13.25" (33.7 cm)

Depth from Bend: 4.5" (11.4 cm)

Blade Width: 2.4 cm

Designed by E. J. Whelan, III, MD



Curved Hohmann Retractor-Wide

PRODUCT NO:

6215

Overall Length: 13" (33 cm)

Handle Length: 12" (30.5 cm)

Blade Width: 43 mm



Long Curved Hohmann Retractors-Narrow

PRODUCT NO'S:

6204 [Short Blade]

Overall Length: 16" (40.7 cm)

Handle Length: 13" (33 cm)

Blade Width: 22 mm

6205 [Long Blade]

Overall Length: 15.25" (38.8 cm)

Handle Length: 13" (33 cm)

Blade Width: 22 mm



Proximal Femoral Elevators

Help provide better access to the intramedullary canal

Designed to elevate the proximal femur during total hip surgery while providing better access to the intramedullary canal. The handles are contoured to allow the surgeon a clear field of view of the operating area.

PRODUCT NO'S:

3420-01 [Standard Prongs]

Overall Length: 11.5" (29,2 cm)
Handle Length: 6.5" (16,5 cm)
Blade Width at Widest: 63 mm

3420-05 [Narrow w/Standard Prongs]

Overall Length: 11.5" (29,2 cm)
Handle Length: 6.5" (16,5 cm)
Blade Width at Widest: 45 mm

3420-06

Overall Length: 11.5" (29,2 cm)
Handle Length: 6.5" (16,5 cm)
Blade Width at Widest: 45 mm

New!

7640 [Extra Leverage]

Overall Length: 17.5" (44,5 cm)
Handle Length: 13" (33 cm)
Blade Width at Widest: 63 mm

Narrow with Coating design modification by Lalit Puri, MD



Amstutz Femoral Head-Neck Elevator

Designed to elevate the proximal femur

PRODUCT NO'S:

3410 [Wide]

Overall Length: 12.25" (31,1 cm)
Blade Width at Widest: 67 mm

3410-01 [Narrow]

Overall Length: 12.25" (31,1 cm)
Blade Width at Widest: 50 mm

Designed by Harlan C. Amstutz, MD



APC Proximal Femoral Elevator

Elevates the proximal femur during total hip or hemi-arthroplasty surgery

Designed to elevate the proximal femur during total hip or hemi-arthroplasty surgery. Its unique design provides excellent access to the intramedullary canal. The elevator's geometry incorporates serrated edges to grip and elevate the proximal femur.

PRODUCT NO'S:

3421-00 [Standard]


Overall Length: 10.75" (27,3 cm)
Blade Width at Widest: 63 mm

3421-01 [Small]

Overall Length: 10.75" (27,3 cm)
Blade Width at Widest: 50 mm

Designed by APC, Inc.



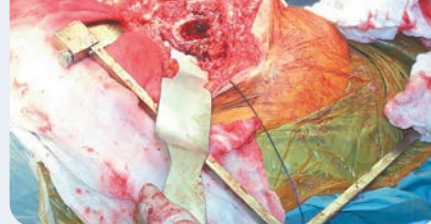

Extra Leverage Femoral Neck Elevator

Designed by Wayne M. Goldstein, MD

PRODUCT NO'S:

7650 [Standard]
Overall Length: 18.25" (46,4 cm)
Handle Length: 9.25" (23,5 cm)
Blade Width: 38 mm

7650-02 [Short Handle]
Overall Length: 15.25" (38,8 cm)
Handle Length: 6.25" (15,9 cm)
Blade Width: 38 mm



Mueller-type Femoral Neck Elevator

Designed to elevate the proximal femur

Extra Deep modified by
Tom Eickmann, MD

PRODUCT NO'S:

3415 [Standard]
Overall Length: 13.5" (34,3 cm)
Handle Length: 6.5" (16,5 cm)
Blade Width at Widest: 25 mm

3418 [Extra Deep]
Overall Length: 15.25" (38,8 cm)
Handle Length: 6.5" (16,5 cm)
Blade Width at Widest: 25 mm



Hur Modified Mueller-type Femoral Neck Elevator

Designed for the anterior approach to help expose the femoral calcar during broaching

The modified Mueller-type design non-forked end helps reduce stress risers and fractures.

PRODUCT NO:

3416
Overall Length: 13" (33 cm)
Handle Length: 6.5" (16,5 cm)
Blade Width at Widest: 1.25" (31,7 mm)



Wide blade design modification by John Hur, MD

Whelan Femoral Neck Elevator

Elevator has long tines to rest on the stronger bone at the base of the neck and calcar, and also fits well over the lesser trochanter and iliopsoas tendon to give excellent exposure for femoral broaching

Designed by E. J. Whelan, III, MD

PRODUCT NO:

3414
Overall Length: 13.75" (34,9 cm)
Depth from Bend: 1.5" (3,8 cm)
Blade Width: 2,4 cm



Stulberg Proximal Femoral Elevator

Designed by S. David Stulberg, MD

PRODUCT NO:

3420-09
Overall Length: 14" (35,6 cm)
Handle Length: 10" (25,4 cm)
Blade Width at Widest: 48 mm
Blade Width at Prongs: 24 mm



New!



Hip Retractor with Waist Pad

Designed to help eliminate the use of another hand by resting the waist pad against the body for use during posterior THA


PRODUCT NO:

7557

Overall Length: 14.25" (36,2 cm)
Blade Width: 34 mm
Blade Length: 4" (10,2 cm)
Blade Hole: 23,6 mm x 15,4 mm



Elevator designed by Luis Ulloa
Waist Pad designed by Christopher Blair, DO

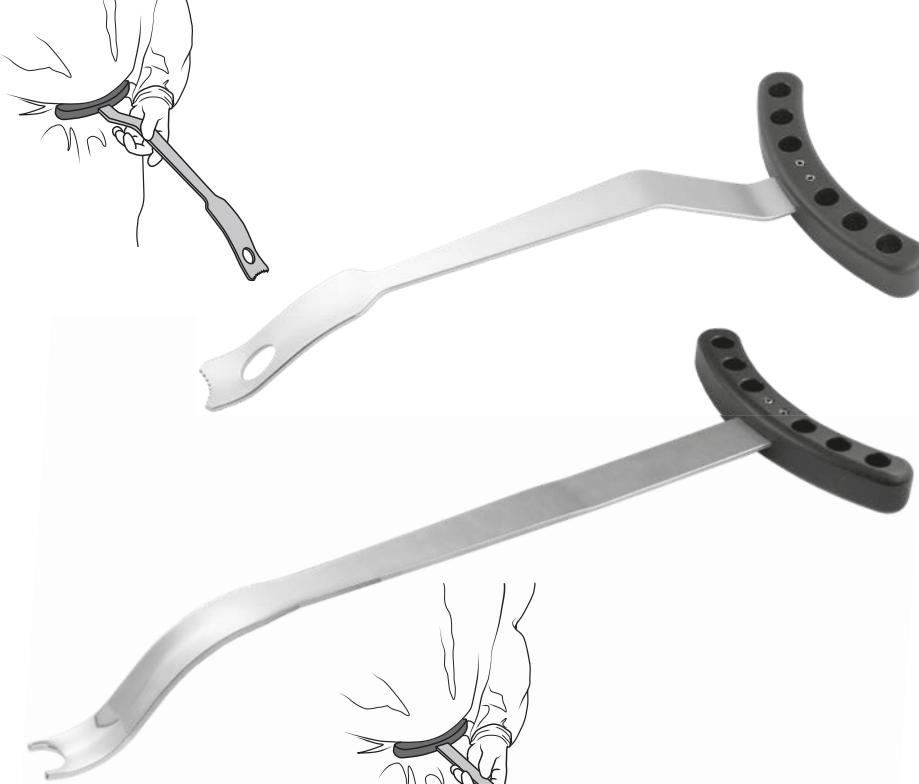

Femoral Neck Elevator with Waist Pad

Designed to elevate the femoral neck for broaching


The waist pad allows the retractor to be wedged into the surgeons waistline to help control the elevator and maintain elevation of the femoral neck for broaching.

PRODUCT NO:

7556

Overall Length: 18" (45,7 cm)
Neck Width: 25 mm
Blade Width: 25 mm

Elevator designed by Luis Ulloa
Waist Pad designed by Christopher Blair, DO

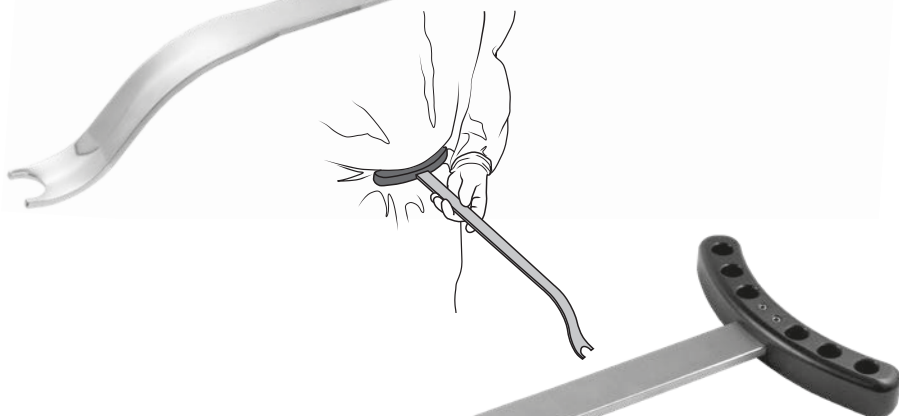

Blair Narrow Femoral Neck Elevator with Waist Pad

Designed to elevate the femoral neck for broaching

The waist pad allows the retractor to be wedged into the surgeons waistline to help control the elevator and maintain elevation of the femoral neck for broaching.

PRODUCT NO:

3409

Overall Length: 18" (45,7 cm)
Neck Width: 19 mm
Width at End: 25 mm

Designed by Christopher Blair, DO



McPherson Retractor Extender

Designed to extend a standard retractor

Fits most retractors, providing additional retraction leverage.

PRODUCT NO:

6022

Overall Length: 15.625" (39,7 cm)

Designed by Ed McPherson, MD



Hand/Waist Rest Adapter

Allows for hands-free use of a femoral elevator during posterior approach hip arthroplasty

Locking screw tightens onto the handle of many retractors/ elevators to add a large surface for holding either by hand or by pressing into the waist.

PRODUCT NO:


8206

Overall Length: 8" (20,3 cm)
Handle Insert Depth: 2.5" (6,4 cm)
Handle Insert Internal Diameter: 1" (2,5 cm)
Rest Pad Dimensions: 4" x 4" (10,2 x 10,2 cm)



Designed by Matthew Clayton, MD



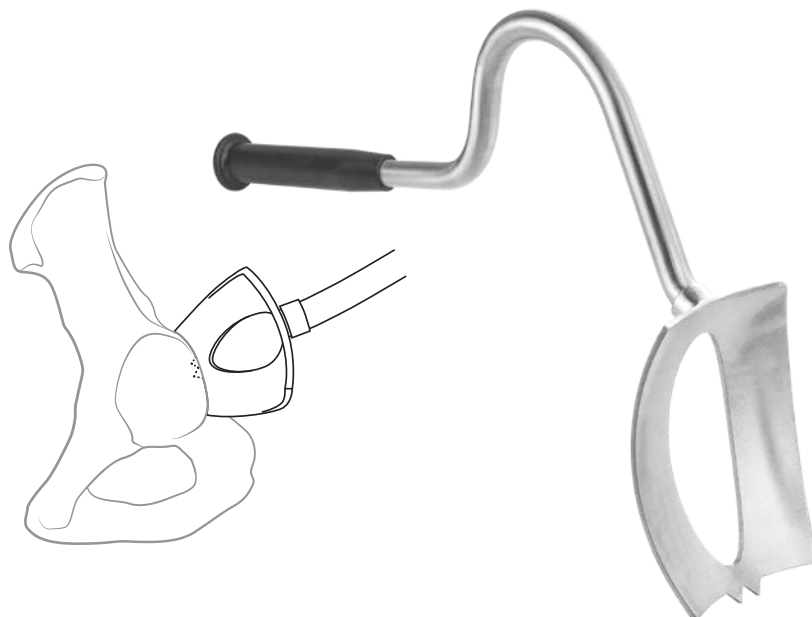

Stowell Modified Posterior Acetabular Retractor



Designed to be placed along the posterior rim of the acetabulum to facilitate exposure and acetabular preparation

PRODUCT NO:

7330

Overall Length: 14.5" (36,9 cm)
Handle Length: 5.25" (13,3 cm)
Blade Depth: 4" (10,4 cm)
Blade Width: 2.75" (7 cm)
Prongs: 8 mm Wide x 6 mm Long

Designed by R.L. Stowell, MD

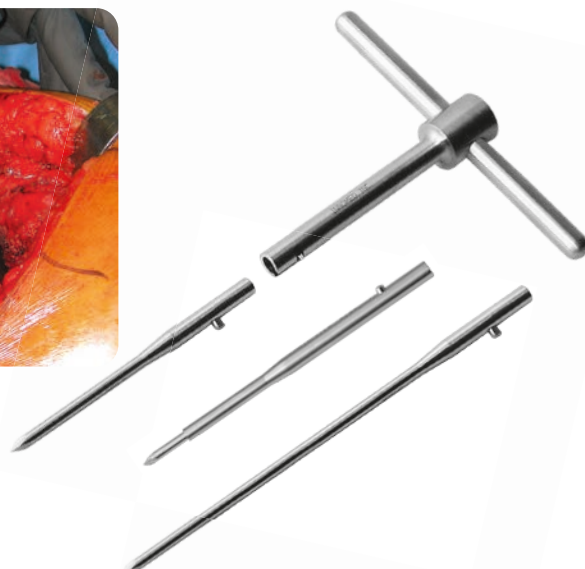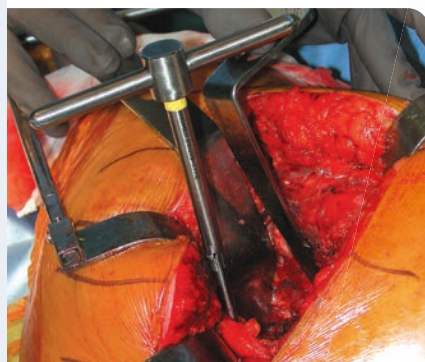

Amstutz Acetabular Exposure Pin System



PRODUCT NO'S:

1200-00 [Set: Ins/Ext & Two Pins]

1200-0A [Set: Ins/Ext & Two Pins w/Stop]

Also sold Individually:

1200-01 [Inserter/Extractor]

1200-02 [Pin]

Overall Length: 4.5" (11,4 cm)
Pin Depth: 2" (5,1 cm)
Pin Diam.: 3.9 mm


1200-03 [Pin with Stop]

Overall Length: 4.5" (11,4 cm)
Pin Tip-to-Stop Depth: .75" (1,9 cm)
Pin Diameter: 3.2 mm

1200-04 [Deep Pin]

Overall Length: 7" (17,8 cm)
Pin Depth: 4.5" (11,4 cm)
Pin Diameter: 3.9 mm

Designed by Harlan C. Amstutz, MD



Tube and Extender Pins


Designed to help achieve wide exposure of the acetabulum during total hip arthroplasty

Helpful tools for inserting/removing pins.

PRODUCT NO'S:

4020 [Pin Inserter]

3030 [Pin Inserter/Extractor]

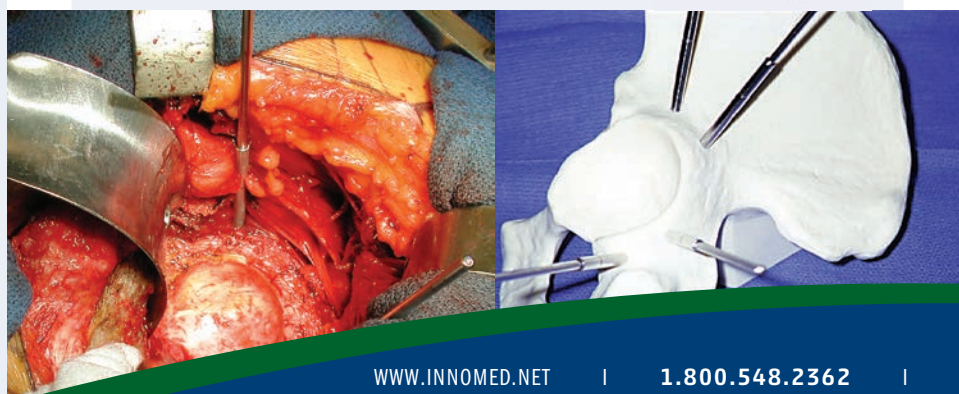

PRODUCT NO'S:

Packages of 10

1230 [Tube Pin]

Pin Diameter at End: 1/8" (3,2 mm)
Overall Length: 70 mm
Length to Stop: 20 mm

1250 [Extender Pin]

Pin Diameter: 1/8" (3,2 mm)
Overall Length: 100 mm



Self-Retaining Hip Surgery Retractor System

Designed by S. David Stulberg, MD



Helps to free assisting personnel while providing excellent exposure during hip arthroplasty and hip fracture surgery

Square Frame

PRODUCT NO:

7450-01D

12.75" x 11.25" (32,4 cm x 28,6 cm)



Standard Frame

PRODUCT NO'S:

7450-01A [Standard]

12.75" x 9.5" (32,4 cm x 24,1 cm)

7450-01B [Medium]

9.75" x 9.5" (24,4 cm x 24,1 cm)



Double Locking Standard Frame

Designed with a second sliding blade lock for enhanced stability, especially in obese patients

Allows both locked blades to be fully adjustable, yet with the ability to be securely fixed, diminishing the chance for shifting, and allowing for more secure self-retaining exposure.

PRODUCT NO'S:

7430 [Standard]

12.75" x 9.5" (32,4 cm x 24,1 cm)



Designed by Matthew P. Lorei, MD

Charnley-Type Frame

Can be used with any blade



PRODUCT NO'S:

7445 [Standard] 12" x 9.5" (30,5 cm x 24,1 cm)

7445-01B [Narrow] 10" x 9.5" (25,4 cm x 24,1 cm)

Charnley-type frames come standard with 1 each:

7445-02 Rounded 2" (5,1 cm) Charnley Blade


7450-02 2" (5,1 cm) Standard Blade

7455-02 2" (5,1 cm) Charnley Blade


Frames also sold individually:

7445-01 [Standard]


7445-01B-01 [Narrow]

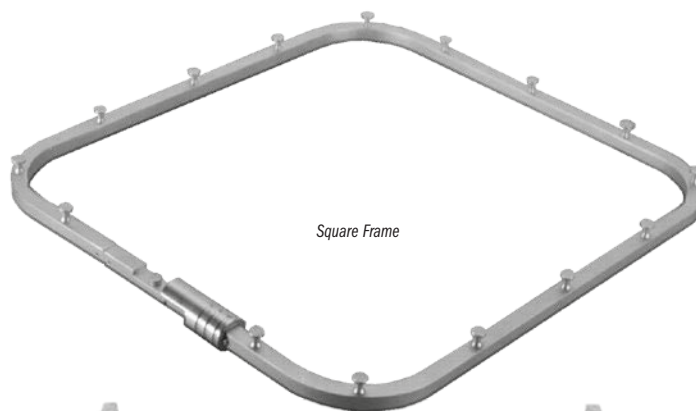


Square Frame

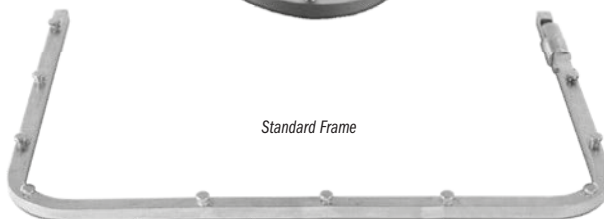

Standard Frame

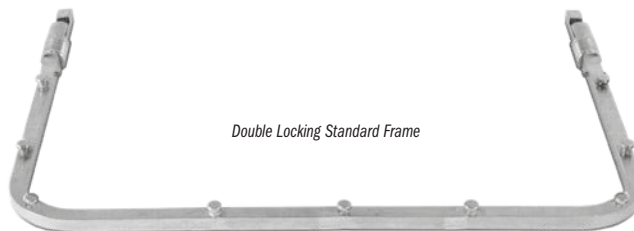

Double Locking Standard Frame

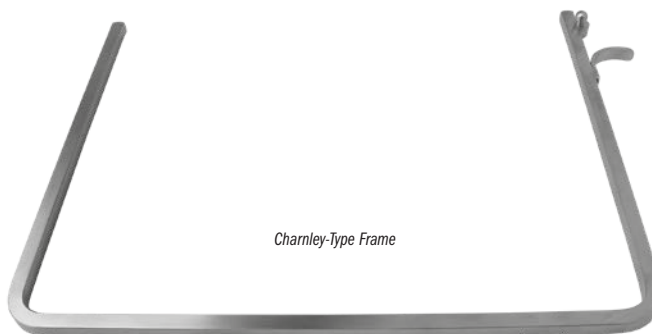

Charnley-Type Frame

Self-Retaining Tension Retractor

The expandable design allows for a wide variety of charnley-style blades to be used for exposure in total joint and trauma procedures



Retractor handle only – blades not included.

PRODUCT NO:

1586 [Tension Retractor]

Overall Length: 8.875" (22,5 cm)

Maximum Width at Pegs: 8" (20,3 cm)

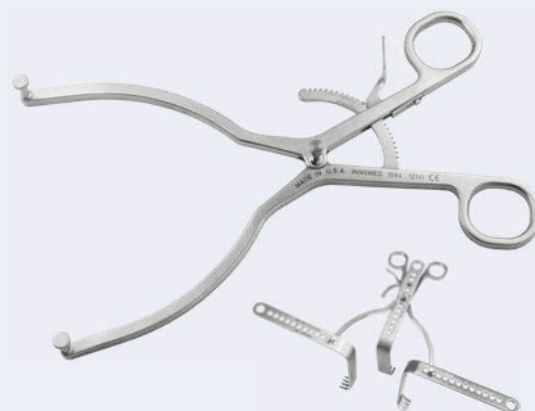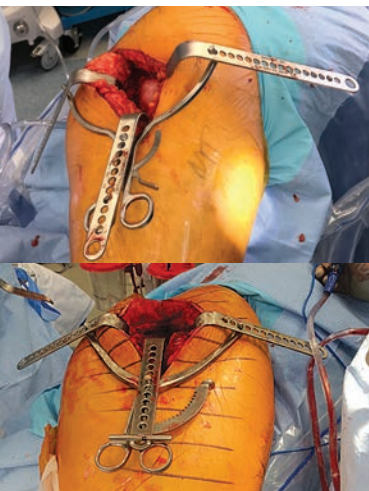



Standard Blades

PRODUCT NO'S:

Handle Length: 6" (15,2 cm)
7450-02 2" (5,1 cm) blade depth
7450-03 3" (7,6 cm) blade depth
7450-04 4" (10,2 cm) blade depth
7450-05 5" (12,7 cm) blade depth
7450-06 6" (15,2 cm) blade depth



Standard Blades with T-Handle

T-bar handles help prevent the hand from slipping

PRODUCT NO'S:

7450-02T 2" (5,1 cm) blade depth
7450-03T 3" (7,6 cm) blade depth
7450-04T 4" (10,2 cm) blade depth
7450-05T 5" (12,7 cm) blade depth
7450-06T 6" (15,2 cm) blade depth



Long Standard Blades

PRODUCT NO'S:

Handle Length: 8" (20,3 cm)
7451-02 2" (5,1 cm) blade depth
7451-03 3" (7,6 cm) blade depth
7451-04 4" (10,2 cm) blade depth
7451-05 5" (12,7 cm) blade depth
7451-06 6" (15,2 cm) blade depth



2.5" Blade with Teeth

New!

PRODUCT NO:

C1013
Overall Length: 6.75" (17,1 cm)
Handle Length: 6.375" (16,2 cm)
Blade Depth: 2.5" (6,4 cm)
Blade Width: 1" (2,54 cm)

Mobile Body Assemblies

PRODUCT NO:

7447 [One Body Assembly]

Position retractors exactly where you want them!

Moveable-peg system allows for precise interoperative retractor positioning adjustments

Works with any existing frame system

3-Prong Rake Blade

PRODUCT NO:

7450-10A 1" (2,5 cm) blade depth



5-Prong Rake Blade

PRODUCT NO:

7450-10B 1" (2,5 cm) blade depth



Toy Anterior Modified Hibbs Blades

Designed by Patrick Toy, MD

Designed to separate/protect the medial (rectus femoris) and lateral (tensor fascia lata) soft tissues without an assistant holding an additional instrument when used in conjunction with a self-retaining frame system. The modifications of the blade help maintain its position while helping to minimizing risk to neurovascular structures.

PRODUCT NO'S:

7453 [Standard] 3.875" (9,8 cm) blade depth
7454 [Shallow] 2.75" (7 cm) blade depth



Extra Large Standard Blades

Designed by Andrew D. Bunta, MD

Help retract soft tissue in larger patients

PRODUCT NO'S:

7470-02 2" (5,1 cm) blade depth
7470-03 3" (7,6 cm) blade depth
7470-04 4" (10,2 cm) blade depth



Wide Standard Blades

PRODUCT NO'S:

Blade Width: 2" (5,1 cm)
7450-W-02 2" (5,1 cm) blade depth
7450-W-03 3" (7,6 cm) blade depth
7450-W-04 4" (10,2 cm) blade depth
7450-W-05 5" (12,7 cm) blade depth
7450-W-06 6" (15,2 cm) blade depth



Extra Wide Blades

Designed by Andrew D. Bunta, MD

PRODUCT NO'S:

Blade Width: 2.75" (7 cm)
7460-01 2.5" (5,1 cm) blade depth
7460-02 3.25" (8,3 cm) blade depth



Soft Tissue Blades

PRODUCT NO'S:

7450-09A [Standard] 2" (5,1 cm) blade depth
7450-09B [Deep] 2.5" (6,4 cm) blade depth



Hohmann Style Blades

PRODUCT NO'S:

7450-08A [Standard] 4" (10,2 cm) blade depth
7450-08B [Deep] 6" (15,2 cm) blade depth



Bennett Style Blade

PRODUCT NO'S:

7450-07A [Standard] 4" (10,2 cm) blade depth
--

Retractor Blades for Charnley-type Frame



PRODUCT NO'S:


7445-02 Rounded 2" (5,1 cm) blade depth
7445-03 Rounded 2.5" (6,4 cm) blade depth
7445-04 Rounded 3.5" (8,9 cm) blade depth
7455-02 2" (5,1 cm) blade depth
7455-03 3" (7,6 cm) blade depth
7455-04 4" (10,2 cm) blade depth
7455-06 6" (15,2 cm) blade depth



Wedges for Frames *Help stabilize retractor blades*

PRODUCT NO'S:

7450-89 [Thin Wedge]
Overall Length: 1.75" (4,4 cm)
Wedge Thickness: 4 mm
7450-99 [Thick Wedge]
Overall Length: 1.75" (4,4 cm)
Wedge Thickness: 8 mm



Rosen "V" Deep Soft Tissue Retractor

Designed for soft tissue retraction with an ergonomic handle

PRODUCT NO:

6239

Overall Length: 12" (30,5 cm)

Blade Depth: (3.5" (8,9 cm)

Blade Width: 1.75" (4,4 cm)

Designed by Adam Rosen, MD



Alvi Small Charnley Style Locking Frame Set

Self-retaining frame and retractor system designed for anterior total hip arthroplasty

The blades help retract the hip capsule and musculature, permitting an unobstructed view of the acetabulum while freeing an assistant.

PRODUCT NO'S:

7425-00 [Set]

Also available individually:

7425-01 [Small Locking Frame]

Dimensions: 9" x 7" (22,9 cm x 17,8 cm)

7425-02 [2" Tapered Blade]

Blade Depth: 2" (5,1 cm)

Handle Length: 7" (17,8 cm)

Blade Width: 1" (2,54 cm)

7425-03 [3" Tapered Blade]

Blade Depth: 3" (7,6 cm)

Handle Length: 7" (17,8 cm)

Blade Width: 1" (2,54 cm)

7425-04 [4" Tapered Blade]

Blade Depth: 4" (10,2 cm)

Handle Length: 7" (17,8 cm)

Blade Width: 1" (2,54 cm)

Set comes with locking frame (7425-01) and one each of the three blade sizes: 2" (7425-02), 3" (7425-03), and 4" (7425-04)

Designed by Hasham Alvi, MD



Charnley/Sorrells Low-Profile Hip Arthroplasty Retractor System

Conforms to the thigh, providing low-profile self-retaining exposure of the femur and acetabulum in Total Hip Arthroplasty

PRODUCT NO'S:

7318-00 [Complete System]

7318-01 [Low-Profile Frame]

Length: 14.5" (36,9 cm)

Maximum Width: 12" (30,5 cm)

7318-02 [Small Narrow Blade]

Blade Width: 1.25" (3,2 cm)

Blade Depth: 1.25" (3,2 cm)

Overall Length: 8.5" (21,6 cm)

7318-03 [Small Wide Blade]

Blade Width: 2" (5,1 cm)

Blade Depth: 1.25" (3,2 cm)

Overall Length: 8.5" (21,6 cm)

7318-04 [Medium Narrow Blade]

Blade Width: 1.25" (3,2 cm)

Blade Depth: 2.25" (5,7 cm)

Overall Length: 8.5" (21,6 cm)

7318-05 [Medium Wide Blade]

Blade Width: 2" (5,1 cm)

Blade Depth: 2.25" (5,7 cm)

Overall Length: 8.5" (21,6 cm)

7318-06 [Medium Malleable Blade]

Blade Width: 1.25" (3,2 cm)

Blade Depth: 2.25" (5,7 cm)

Overall Length: 8.5" (21,6 cm)

7318-07 [Large Narrow Blade]

Blade Width: 1.25" (3,2 cm)

Blade Depth: 3.25" (8,3 cm)

Overall Length: 8.5" (21,6 cm)

7318-08 [Large Wide Blade]


Blade Width: 2" (5,1 cm)

Blade Depth: 3.25" (8,3 cm)

Overall Length: 8.5" (21,6 cm)



- ▶ Provides a varied selection of blades, both pre-shaped and malleable, for both superficial and deep retraction
- ▶ Curved blades conform with the thigh
- ▶ Self-retaining and easily adjustable

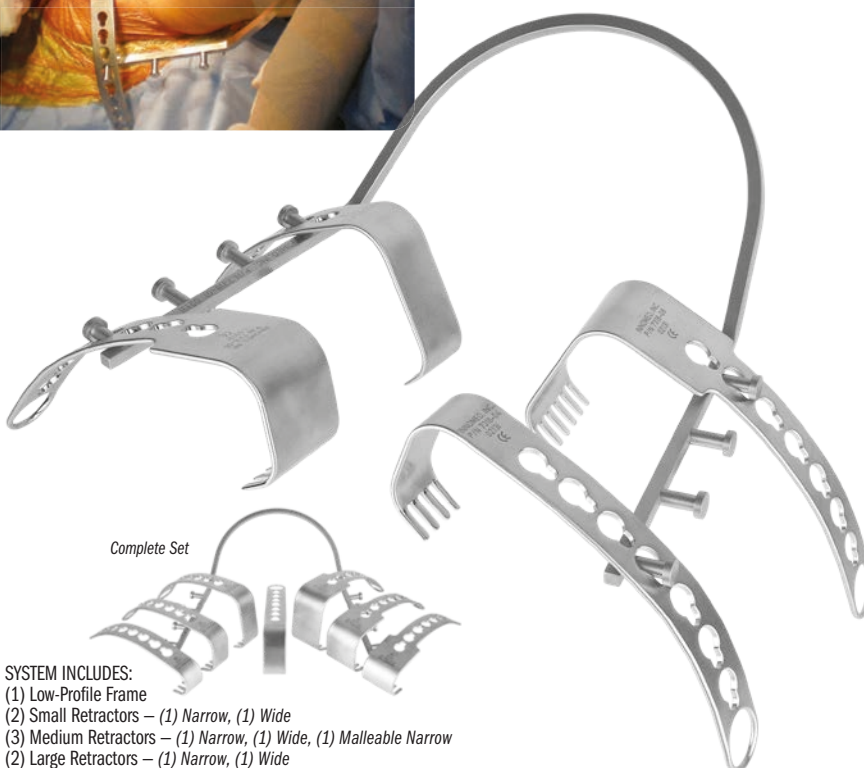


Complete Set

SYSTEM INCLUDES:

- (1) Low-Profile Frame
- (2) Small Retractors — (1) Narrow, (1) Wide
- (3) Medium Retractors — (1) Narrow, (1) Wide, (1) Malleable Narrow
- (2) Large Retractors — (1) Narrow, (1) Wide

Designed by R. Barry Sorrells, MD



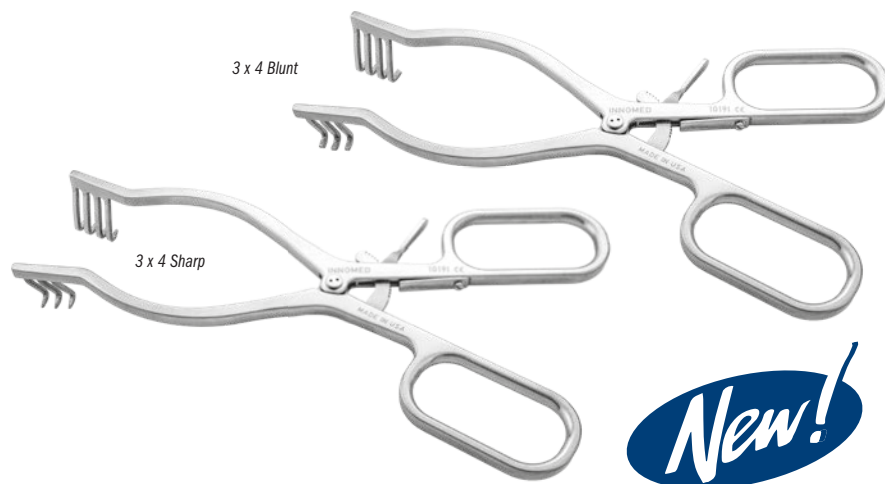

Whelan Large Anterior Hip Weitlaner Retractor

Designed for self-retaining exposure during anterior approach THA

PRODUCT NO'S:

1576-B [Blunt]
Overall Length: 9" (22,9 cm)
Blade Depth: 1" (2,54 cm)

1576-S [Sharp]
Overall Length: 9" (22,9 cm)
Blade Depth: 1" (2,54 cm)



Designed by Edward J. Whelan III, MD



Double Bent Extended Deep Tissue Retractor

Designed to help maximize exposure with 90° arms and deep tissue blades

PRODUCT NO:

1859
Overall Length: 8" (20,3 cm)
Handle-to-Bend Length: 6" (15,2 cm)
Drop Depth: 3" (7,6 cm)
Prongs: 1.375" Deep x 1.375" Wide (3,5 x 3,5 cm)




Alvi Beckman Self-Retaining Retractor

Designed for direct anterior approach hip arthroplasty, the wide, blunt and curved teeth help provide for better self-retaining retraction during dissection through the superficial and deep tissue planes to expose the hip joint

PRODUCT NO:

1577
Overall Length: 13" (33 cm)
Length to Bend: 9.625" (24,4 cm)
Depth when Full Bent: 3.125" (7,9 cm)

Designed by Hasham Alvi, MD

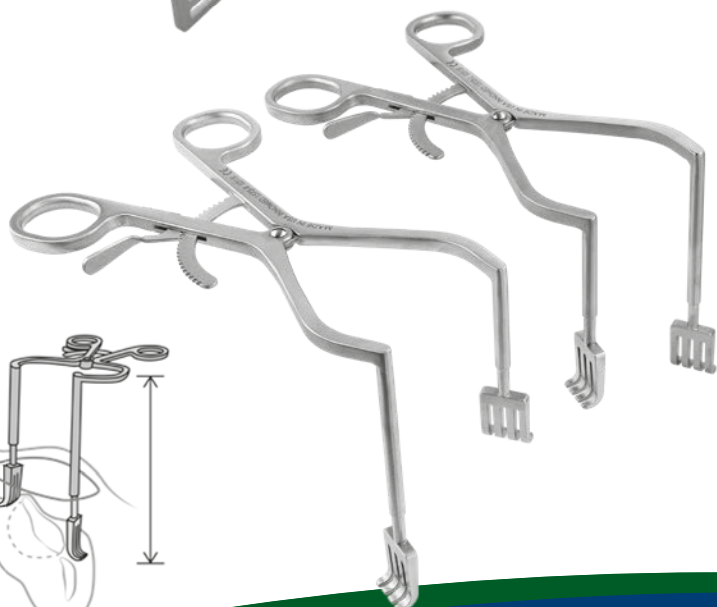

Durham Offset Zelpi Retractor

Staggered depth retractor designed for exposure during total hip and total shoulder surgery


- ▶ In hip surgery, with the handle towards the surgeon, the longer leg is on the inside.
- ▶ In shoulder surgery, with the handle downward, the longer leg is on the outside.
- ▶ The longer leg extends 1.1" (2,8 cm) deeper.

PRODUCT NO'S:

1573-L [Left]
Overall Length: 8.5" (21,6 cm)
Leg Depths: 3.1" & 4.2" (7,9 cm & 10,7 cm)

1573-R [Right]
Overall Length: 8.5" (21,6 cm)
Leg Depths: 3.1" & 4.2" (7,9 cm & 10,7 cm)

Designed by Alfred Durham, MD



Flat Gelpi Retractors

Designed to help retract a broader area of soft tissue or muscle

The two largest sizes feature double ergonomic handles for increased comfort and control.

PRODUCT NO'S:

4191 [Small]
Overall Length: 6.5" (16,5 cm)
Prong Depth: 1.25" (3,2 cm)

4192 [Medium]
Overall Length: 7.25" (18,4 cm)
Prong Depth: 1.75" (4,4 cm)

4193 [Large]
Overall Length: 9" (22,9 cm)
Prong Depth: 3" (7,6 cm)

4194 [Deep]
Overall Length: 10" (24,4 cm)
Prong Depth: 5" (12,7 cm)



Meyering Spreader

A self-retaining soft tissue retractor for use in hip, knee, and shoulder surgery

PRODUCT NO:

6244
Overall Length: 8.5" (21,6 cm)
Blade Depth: 3.5" (8,9 cm)
Blade Width: 1" (2,54 cm)



Romanelli Deep Gelpi Retractor

Offers the versatility and ability to be used in minimally invasive total hip replacements

Can be used to hold the hip capsule out of the way for easy visualization, and to allow reaming of the acetabulum without catching the capsule in the reamer. The ends of the retractor have dull tips to help avoid soft tissue damage. Wider separation occurs at the deep capsule level. Holds the muscle out of the way while retracting the capsule.

PRODUCT NO:

4270
Overall Length: 7.45" (18,9 cm)
Depth from Bend: 5.125" (13 cm)
Prong Length: .5" (13 mm)

Designed by Ron Romanelli, MD




Gelpi Retractors

PRODUCT NO'S:


4180 [Standard]
Overall Length: 7.5" (19,1 cm)

4181 [With Ergonomic Handle]
Overall Length: 7.5" (19,1 cm)




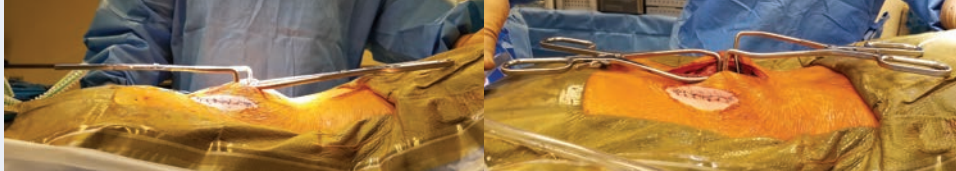

TYPICAL POSITION OF MOST
RETRACTOR HANDLES

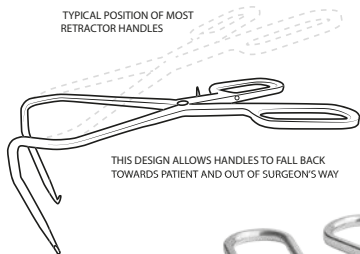

THIS DESIGN ALLOWS HANDLES TO FALL BACK
TOWARDS PATIENT AND OUT OF SURGEON'S WAY

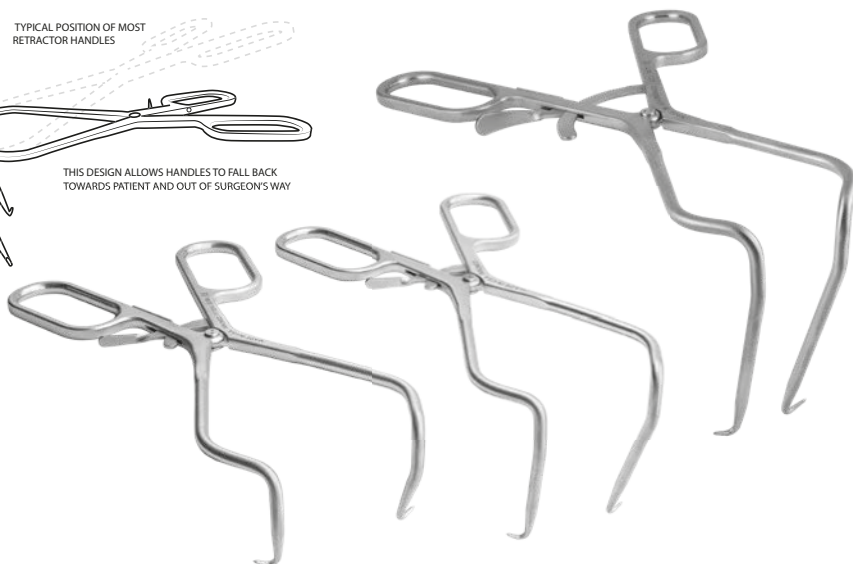

Rogozinski Reverse Angle Retractors

Designed to be self-leveling, helping to maintain the body of the retractor on the patient for soft tissue retraction and out of the surgeons field, with finger loops designed for use with either hand

Designed for spine but can be used for other surgeries as well.

PRODUCT NO'S:

4272 [Large]
Overall Length: 9" (22,9 cm)
Length to Bend: 8.5" (21,6 cm)
Depth: 4.25" (10,8 cm)

4273 [Medium]
Overall Length: 8" (20,3 cm)
Length to Bend: 8" (20,3 cm)
Depth: 3" (7,6 cm)

4274 [Small]
Overall Length: 8" (20,3 cm)
Length to Bend: 8" (20,3 cm)
Depth: 1.75" (4,4 cm)



Designed by
Chaim Rogozinski, MD



Namba Bone Graft Slide

Helps to efficiently guide allograft material into the acetabulum


Helps reduce waste of expensive allograft material by providing a holding trough and slide for effective, directed delivery.

PRODUCT NO'S:

6888
Overall Length: 7.75" (19,7 cm)



Designed by Robert S. Namba, MD



Double Ended Grater Cleaning Tool


Designed for right or left handed use to easily remove bone fragments from acetabular graters

PRODUCT NO:

8007
Overall Length: 7" (17,8 cm)



Designed by Brandon Thompson, CST/CFA

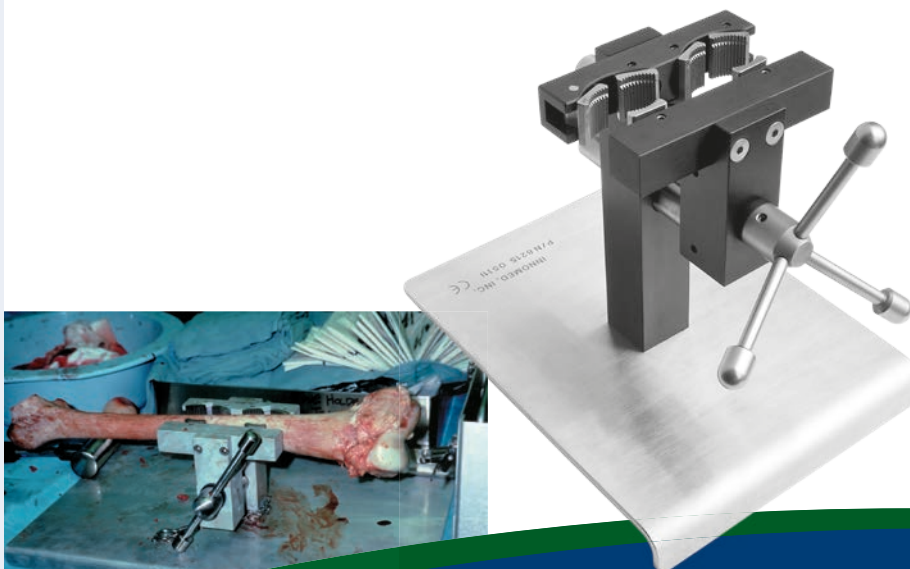

Allograft Bone Vise

Holds allograft bone for reaming, shaping or cutting

The vise is designed with two sets of vise jaws for reaming of two femoral heads and also for holding a long bone horizontally and vertically. The base plate is designed with a table flange for stabilization during use. The vise is completely autoclavable.

PRODUCT NO:

8215
Base Dimensions: 8.25" x 11" (21 cm x 27,9 cm)



Bone Mill

Used to produce allograft material

MADE FOR INNOVATION IN
GERMANY

- ▶ Grinds bone of various densities
- ▶ Produces bone graft of excellent quality for impaction
- ▶ 2 cutting cylinders are included for variable size bone graft
- ▶ Attaches securely with table clamp
- ▶ Fully auto-clavable and easy to dismantle for cleaning
- ▶ Includes housing, two cutting cylinders, handle, push block and table clamp


PRODUCT NO'S:

8205 [Compete Unit including
2 Cylinders and Clamp]
Overall Length (without crank): 12" (30,5 cm)

Replacement Cutting Cylinders:


8205-01 [3.2 mm Hole Diameter/
5 Cutting Rows]

8205-02 [4.2 mm Hole Diameter/
4 Cutting Rows]



Cutting Cylinder

Push Block

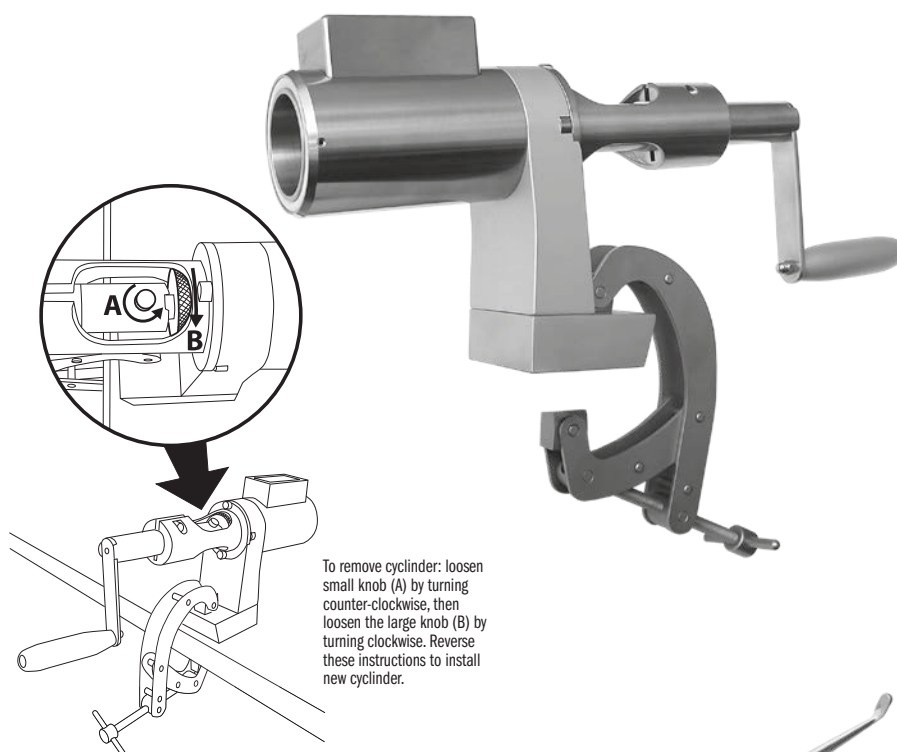

Rib Periosteal Rasp

PRODUCT NO:

C1004
Overall Length: 17" (43,2 cm)
Handle Length: 5" (12,7 cm)
Rasp Pad: 7,5 x 12 mm



Bone Graft Impactors

Tap bone graft or bone parts into
place with minimal bone trauma

Designed with serrated, stainless steel tips and available
in three shapes: round, square and rectangular.

PRODUCT NO'S:

5310 [Round]

Head Diameter: 12.5 mm
Overall Length: 9.5" (24,1 cm)
Handle Length: 4.25" (10,5 cm)

5320 [Square]

Head Dimensions: 10 mm x 10 mm
Overall Length: 9.5" (24,1 cm)
Handle Length: 4.25" (10,5 cm)

5325 [Square with Delrin Tip]

Head Dimensions: 10 mm x 10 mm
Overall Length: 9.5" (24,1 cm)
Handle Length: 4.25" (10,5 cm)

5330 [Rectangular]

Head Dimensions: 10 mm x 3 mm
Overall Length: 9.5" (24,1 cm)
Handle Length: 4.25" (10,5 cm)




Malleable Bone Tamp - Extra Small

Designed to help impact bone into
acetabular cup holes

PRODUCT NO:

5296-02 [Extra Small]
Overall Length: 11.4" (29 cm)
Shaft Length: 5.9" (15 cm)
Impactor Diameter: 6.5 mm

Modified by Serge Kaska, MD
& Amal Das, MD



Malleable shaft can be
contoured for different angles





Ortho Impactors

PRODUCT NO'S:

Overall Length: 9" (22,9 cm)
Shaft Diameter: 9 mm

5331 [11 x 4 mm Rectangle]

5332 [12 x 7 mm Rectangle]



5333 [12 mm Tapered]

5334 [9 mm Square]

5335 [15 mm Round]

5336 [12 mm Round]

5337 [9 mm Round]



Universal Bone Grafting/ Impacting Forceps

Bone graft can be grasped, placed & impacted without changing hands or instruments

Designed with grasping ends for delivery of bone graft. When the graft is in place, the forceps are closed, which forms the ends into an impacting punch. A striking platform forms the end of the forceps for tapping and tamping the graft. Four end diameters are available in two lengths.

PRODUCT NO'S:

Short: 6" (15,2 cm) Length

5010-01 1/8" (3,2 mm) Diameter End

5010-02 3/16" (4,8 mm) Diameter End

5010-03 1/4" (6,3 mm) Diameter End

5010-04 5/16" (8 mm) Diameter End

Long: 10" (25,4 cm) Length

5050-01 1/8" (3,2 mm) Diameter End

5050-02 3/16" (4,8 mm) Diameter End

5050-03 1/4" (6,3 mm) Diameter End

5050-04 5/16" (8 mm) Diameter End

Designed by J. A. Amis, MD



Modular Impactor Set

Makes multiple impactor heads easily visible and available

Designed to have available to the operating surgeon multiple types of impactors utilizing one handle. The rack uses less space and allows the surgeon to quickly see the designs available. The impactors are supplied with stainless steel tips for bone and delrin tips which can be used against an implant for slight placement adjustments.

PRODUCT NO:

5370 [Complete Set]

Overall Handle Length: 8" (20,3 cm)

Grip Length: 4.5" (11,4 cm)

Impactor Head Lengths: 1.45" (3,7 cm)

Base Diameter: 3.5" (8,9 cm)



IHS Inclinometer

Helps to accurately predetermine angles for acetabular cup positioning and insertion—calibrated from 0 to 45°, the indicator may be used on the reamer shaft, the trial cup shaft and the cup impactor shaft

Designed to allow the surgeon to consistently and quickly achieve the desired component position during each step of acetabular preparation and component positioning: acetabular reaming, trial component positioning, and actual component insertion. Steam sterilizable.

PRODUCT NO:

1326

Dimensions: 4" x 2" (10,2 cm x 5,1 cm)



Designed by Craig J. Della Valle, MD

AccuAngle Indicator

Helps to accurately predetermine angles for acetabular cup positioning and insertion
Calibrated from 0 to 45°, the indicator may be used on the reamer shaft, the trial cup shaft and the cup impactor shaft.

Designed to allow the surgeon to consistently and quickly achieve the desired component position during each step of acetabular preparation and component positioning: acetabular reaming, trial component positioning, and actual component insertion. Steam sterilizable without vacuum.

PRODUCT NO:

1325

Dimensions: 4" x 2" (10,2 cm x 5,1 cm)



Designed by S. David Stulberg, MD, A. Llinas, MD and J. Navas, MD

Ruler with 45° Angle Handle

Useful for measuring distances in small deep incisions

Ideal for measuring the distance from the lesser trochanter to the center of the trial femoral head during femoral sizing.

PRODUCT NO:

1430

Handle Length: 5" (12,7 cm)

Ruler Dimensions: 2.5" x .5" (6,4 cm x 1,3 cm)



Designed by Richard A. Sanders, MD

Ruler with Right Angle Handle

Designed to be used to measure the femoral head/neck length



Very helpful in minimally invasive surgery.

PRODUCT NO:



1450

Handle Length: 4.25" (10,8 cm)


Ruler Dimensions: 2.5" x .5" (6,4 cm x 1,3 cm)

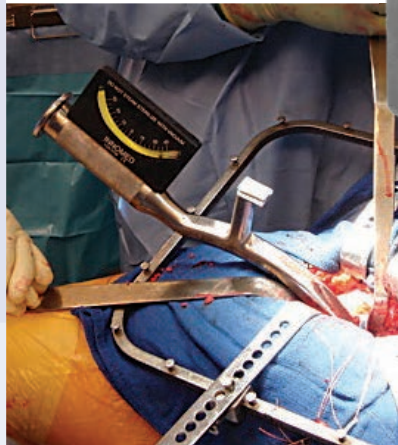

Bottom Profile with Magnets

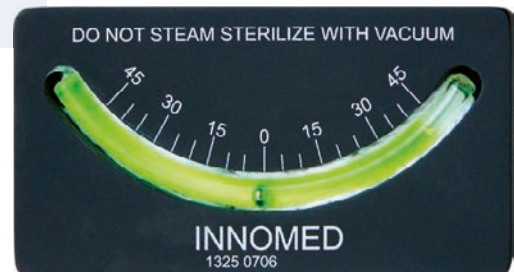

Prototype Shown

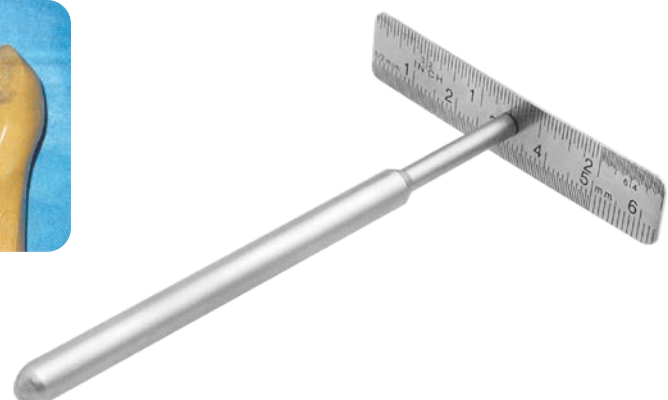

Lombardi Self-holding X-ray Magnification Marker

Helps to remove the variable of X-Ray magnification factor from the process of Orthopedic templating. The flexible, adjustable arm can help reduce patient (and technologist) embarrassment or discomfort when it is required to be positioned in a sensitive area such as the inner thigh.

Fully positionable, this orthopedic X-Ray calibration and marking device features a 1" (2,54 cm) stainless steel ball which, when properly positioned at bone level on a precise anatomical plane, will be this exact size when viewed from all angles, allowing it be used as a calibration marker in surgical planning software applications, helping to gauge the size of other components on that plane. This helps establish precise anatomical measurement.

PRODUCT NO:

2672


Base Dimensions: 11" x 5.25" (27,9 cm x 13,3 cm)

Post Height: 7" (17,8 cm)

Arm Maximum Length: 13" (33 cm)



Designed by Adolph Lombardi, MD

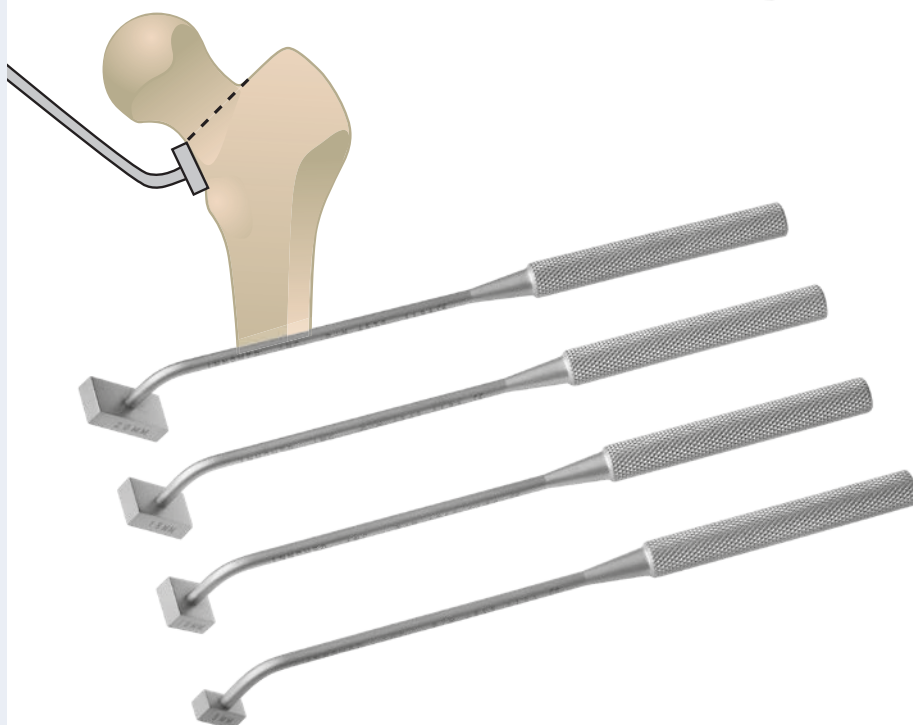

Sanders Femoral Neck Cutting Blocks

Designed to help with accurate placement of the femoral neck osteotomy in total hip surgery

Used to measure the distance from the proximal end of the lesser trochanter to the level of the femoral neck osteotomy. The desired level of the femoral neck osteotomy is determined by preoperative planning. The exact level of the femoral osteotomy helps with leg length, either maintaining equal leg length or correcting leg length discrepancies.

PRODUCT NO'S:

Overall Length: 6.5" (16,5 cm)

4555
Block: 5 x 10 mm

4565
Block: 10 x 15 mm

4560
Block: 10 x 10 mm

4570
Block: 10 x 20 mm

Designed by
Richard A. Sanders, MD



Level has magnets
on the bottom

Sterilizable Level

Steam sterilizable without vacuum for use in surgery

Helpful in hip surgery to ensure the leg is in the same position when checking leg length.

PRODUCT NO:

1180

Dimensions: 2" x .5" x .75" (5,1 cm x 1,3 cm x 1,9 cm)



Leg Length Caliper

Designed to help measure and evaluate pre- and post-THR leg length in conjunction with X-ray calibration and clinical judgement

The caliper utilizes a 5/32" (4 mm) pin in the iliac crest and a 1/8" (3,2 mm) pin in the greater trochanter. (The soft tissue is cleared away and a single drill hole is drilled in the trochanter to accommodate the distal pin, and the hole is marked with methylene blue so it can be easily found.)

Alternatively, a 7.3 mm cannulated screw that accepts a 3.2 mm pin may be used in the greater trochanter. Using the sliding caliper, the difference in leg length measurement before hip dislocation and after the THR procedure helps show the change in leg length.

A Sterilizable Level is included in the set, which helps to ensure the leg is in the same plane when initially putting the leg length caliper on and when reattaching the caliper.

PRODUCT NO'S:

1195 [Complete Set]

Includes: Caliper, Sterilizable Level, and Sterilization Case

Individual/Replacement Parts:

1195-01 [Caliper Only]



Overall Length: 4.5"-6.5" (11,4 cm-16,5 cm)

1180 [Sterilizable Level Only]

Dimensions: 2" x .5" x .75" (5,1 cm x 1,3 cm x 1,9 cm)

1025 [Sterilization Case]

Designed by Michael Koonin, MD

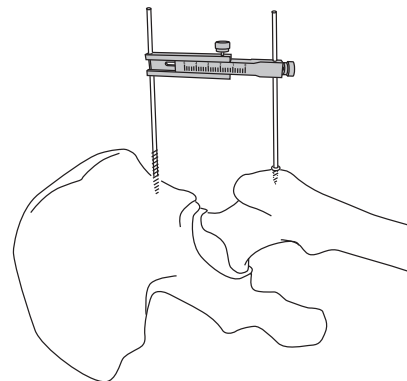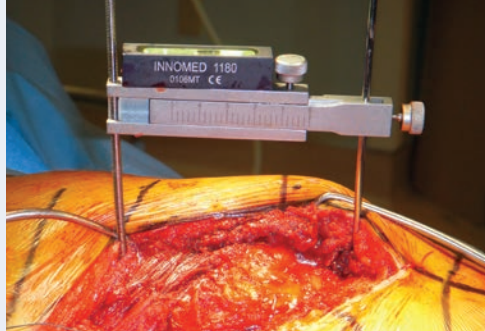

Hole for a 5/32" (4 mm) pin in the iliac crest

Locking screw for caliper

Hole for a 1/8" (3,2 mm) pin in the greater trochanter

Locking screw used on screw pin at 1st measurement to ensure level with 2nd measurement



Sterilizable Level with Bottom Magnets Included

Koonin Leg Length Caliper - Small

Designed for use in small incisions to help measure and evaluate pre- and post-THR leg length in conjunction with X-ray calibration and clinical judgement

Utilizes a 5/32" (4 mm) threaded pin (dull on the outer end) in the iliac crest and a 1/8" (3,2 mm) pin in the greater trochanter. (The soft tissue is cleared away and a single drill hole is drilled in the trochanter to accommodate the distal pin, and the hole is marked with methylene blue so it can be easily found.)

Alternatively, a 7.3 mm cannulated screw that accepts a 3.2 mm pin may be used in the greater trochanter. Using the sliding caliper, the difference in leg length measurement before hip dislocation and after the THR procedure helps show the change in leg length.



PRODUCT NO:

1196

Overall Length: 3.25-4.5" (8,3 cm-11,4 cm)



Designed by Michael Koonin, MD

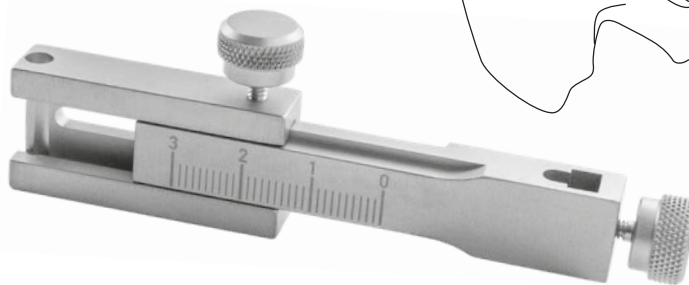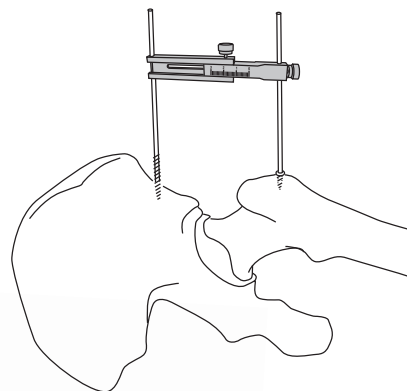

Tissue Protector

Helps protect tissue when a straight reamer is being used

Designed to be used when a straight reamer is being used in a bone canal. Very useful in minimally invasive total hip arthroplasty.



PRODUCT NO'S:

5480-01

Inside Diameter: 1,9 cm

Overall Length: 6,5" (16,5 cm)


Tube Depth: 3,875" (9,8 cm)

5480-02

Inside Diameter: 2,4 cm

Overall Length: 6,5" (16,5 cm)

Tube Depth: 3,875" (9,8 cm)

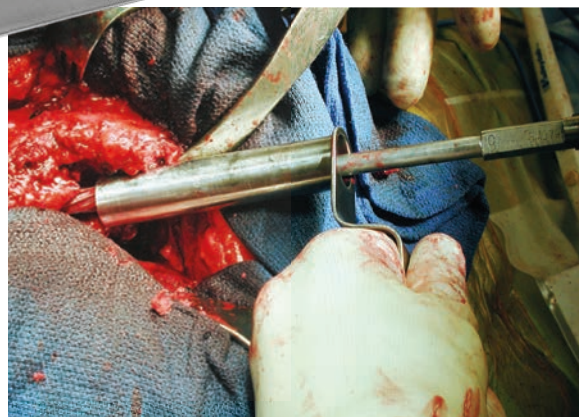

Kenerly Femoral Neck Cutting Guide

Designed for use during the anterior approach for THA to help determine the femoral neck osteotomy location




The guide is placed on the femoral neck and adjusted using the intraoperative C-arm image to visualize and compare to the pre-op templating, providing an excellent location for the initial femoral neck osteotomy

PRODUCT NO:

4590

Overall Length: 8.25" (21 cm)
Handle Length: 1.9" (4,8 cm)
Cutting Guide Bar Length: 1.22" (3,1 cm)
End of Bar to Tip Length: 3.5 mm
Shaft Angle at End: 30°
Shaft Diameter .125" (3,2 mm)

Designed by
J. Lex Kenerly, III, MD

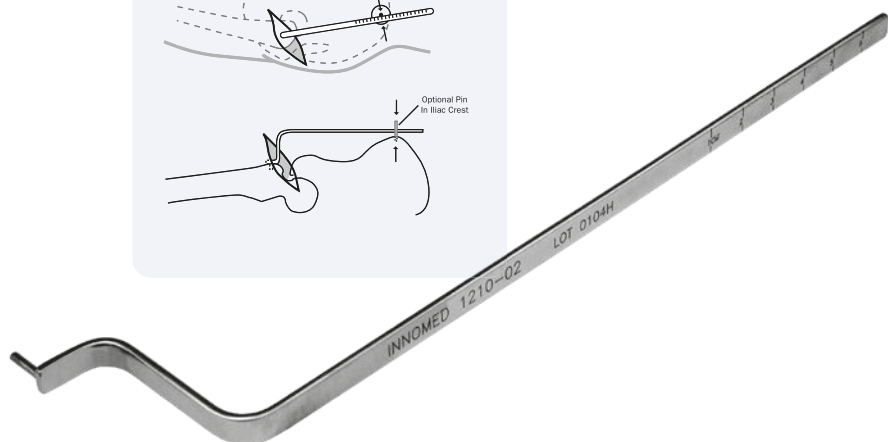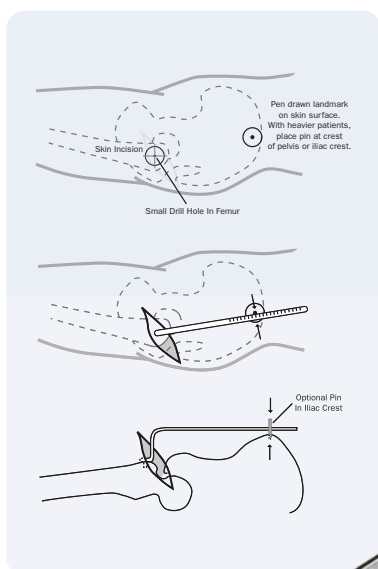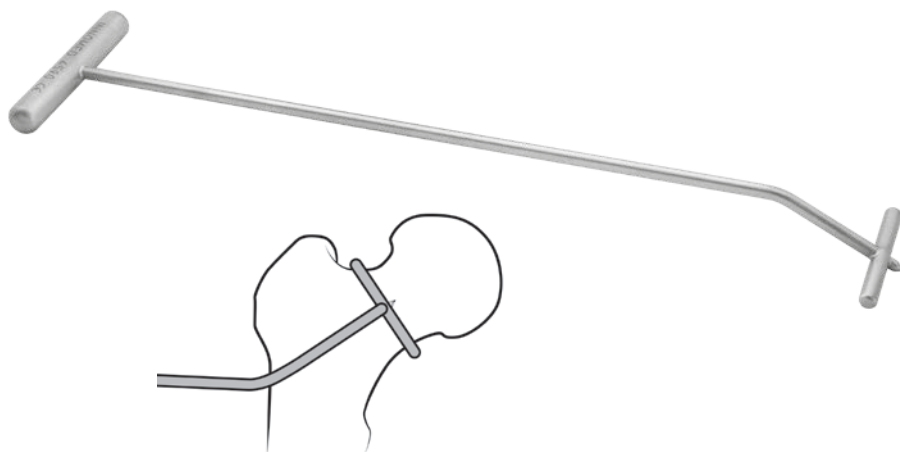

Wixson Leg Length Gauge

Used for intraoperative leg length measurement during minimally invasive total hip arthroplasty

Fits in 5/64 drill hole in trochanter underneath fascia and skin incision. Measures to a skin mark over the iliac crest with the leg supported in a standardized position (e.g. resting on a Mayo stand).



PRODUCT NO'S:

1210-02

Depth: 2" (5,1 cm)
Overall Length: 8" (20,3 cm)
Length-to-bend: 7" (17,8 cm)
Pin Length: 10 mm

1210-03

Depth: 2.75" (7 cm)
Overall Length: 8" (20,3 cm)
Length-to-bend: 7" (17,8 cm)
Pin Length: 10 mm

Designed by R.L. Wixson, MD

Canestra Hip Length Gauge

Helps determine leg length and hip offset in total hip arthroplasty, including minimally invasive techniques

Set consists of one Ruler, one Pin Insertor/Extractor Handle, one 100 mm Pin, one 130 mm Pin, and a case.

PRODUCT NO'S:

1327-00 [Set with Case]

Replacement Parts:

1327-01 [Pin – 100 mm]

1327-02 [T-Handle]
Dimensions: 8" x 5" (20,3 cm x 12,7 cm)


1327-03 [Ruler]

1327-04 [Pin – 130 mm]

1025 [Sterilization Case]

Designed by
Vince Canestra, MD

A detailed
instruction
brochure is
available on
our website.

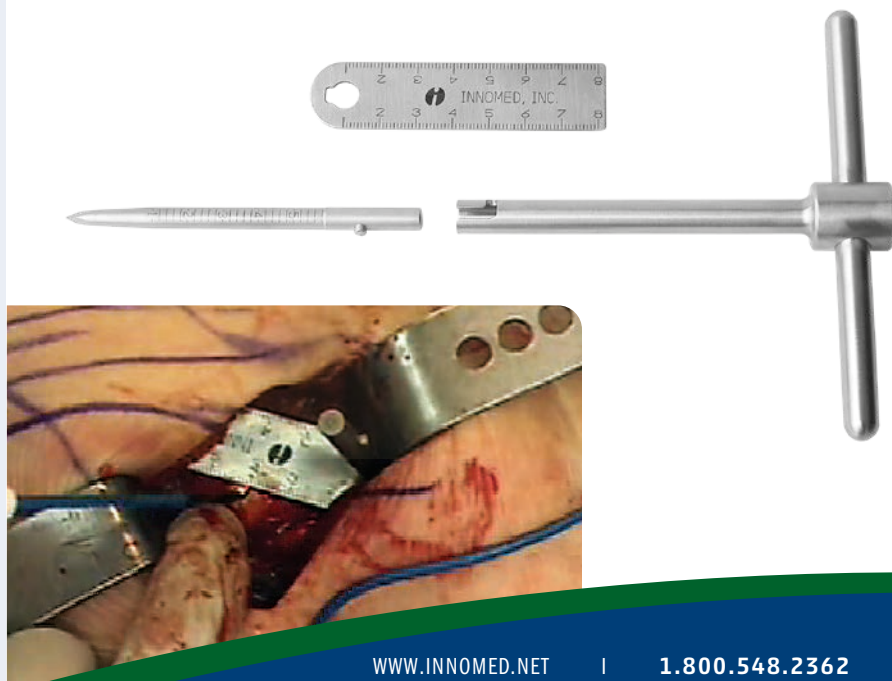

Extended Cup Positioner

Designed to help reposition an acetabular cup during total hip arthroplasty

Ultra hard titanium nitride coating helps to extend life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion.

PRODUCT NO:

5475-10

Diameter: 8 mm

Overall Length: 12.75" (32.4 cm)

Handle Length: 4.75" (12.1 cm)

Shaft Length: 8" (20.3 cm)

Designed modification by
James F. Kayvanfar, MD of an original
design by Thomas Eickmann, MD



Blair Acetabular Cup Positioner

Designed to help adjust the position of an acetabular cup


PRODUCT NO:

4159

Overall Length: 11.5" (29.2 cm)

Shaft Offset: 1" (2.54 cm)

Head Diameter: 1.18" Inside (30 mm / 1.5" Outside (38 mm)



Namba Hip Slide

Safely glides femoral heads into the acetabulum — essential for ceramic heads

Helps reduce a femoral head trial and implant into the acetabulum during total hip surgery. Manufactured of delrin to help eliminate damage to the implant. Can be steam or gas sterilized and is radiolucent. Three sizes to accommodate different diameter heads.

PRODUCT NO'S:

Overall Length: 12" (30.5 cm)

6890 For 22-40 mm heads

6891 For 40-48 mm heads

6892 For 50-60 mm heads

Designed by Robert S. Namba, MD



Doroodchi Coated Femoral Neck Mating Guide

Designed for controlled manipulation of femoral head/neck mating in SuperPATH THA approach

PRODUCT NO:


3419


Overall Length: 11.75" (29.8 cm)

Blade Width: 1.125" (29 mm)




Designed by Hamidreza Doroodchi, MD

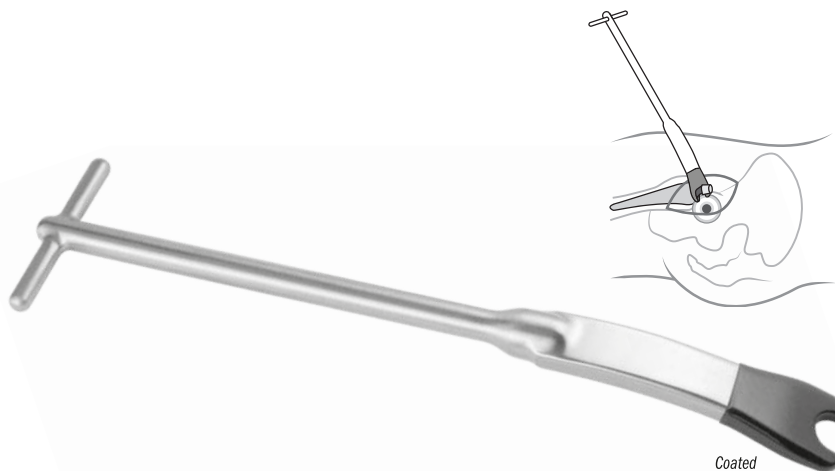

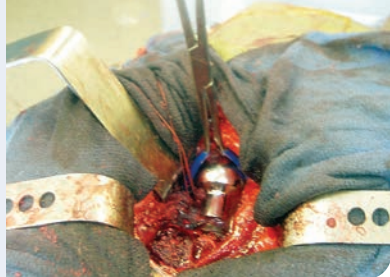

Coated

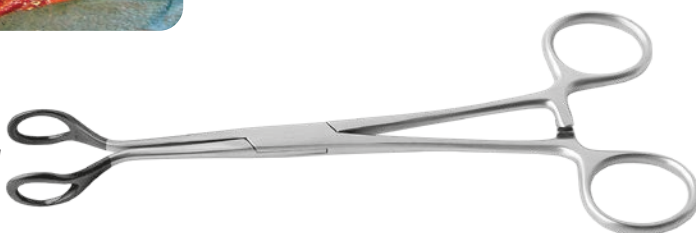

Modular Head Holder

Designed to hold 22 mm to 36 mm heads for ease of insertion in minimally invasive THR

Head holding ends are plastic coated to help eliminate any damage to the implant. Available in two lengths. Steam and gas sterilizable.

PRODUCT NO'S:


8290-01
Overall Length: 7" (17,8 cm)

8290-02
Overall Length: 9" (22,9 cm)

Designed by Byron E. Dunaway, MD
& Wayne Goldstein, MD



Coated



Taper Head Impactor

Designed to impact a modular head during minimally invasive THR

The impactor has a protective coating to interface against the implant to help prevent damage while seating the implant. Can be used with 22 mm to 36 mm heads. Steam and gas sterilizable.

PRODUCT NO:

7840
Overall Length: 12" (30,5 cm)



Designed by Byron E. Dunaway, MD & Wayne Goldstein, MD

Delrin




Offset Cup Liner Inserter

Offset to improve visualization and for mis hip surgery

PRODUCT NO'S:

5032 [32 mm]
Head Diameter: 32 mm
Overall Length: 16.25" (41,3 cm)

5036 [36 mm]
Head Diameter: 36 mm
Overall Length: 16.25" (41,3 cm)



Delrin

Curved Femoral Head Impactor

Allows for in-line femoral head impaction during minimally invasive THR

The curved offset handle allows the head impactor to be slid under the skin of a small incision, and helps provide hand-held stability and maneuverability within the wound, while the impaction platform is easily accessible outside the wound. The impaction disc is made of delrin, which helps prevent marring and scratching of components.

PRODUCT NO:

3644
Overall Length: 7.25" (18,4 cm)



Designed by Amiee Zirpel

O'Reilly Femoral Head Extractor

Designed to help remove the femoral head—during THA, MIS Direct Anterior THA, and hip fracture surgery/hemiarthroplasty


The perpendicular osteotome blades help provide purchase in osteoporotic bone, while the central osteotome provides a visual estimate of the instrument's depth of penetration to avoid acetabular injury with use during hemiarthroplasty.

The handle helps obtain rotational torque needed to rotate and dislocate the femoral head in direct anterior hip arthroplasty.

PRODUCT NO'S:	
3675 [Large]	
Overall Length: 9.5" (24,1 cm)	
Hammer Platform Diameter: 1.125" (2,9 cm)	
Width at End: 1.1" (2,8 cm)	
3674 [Small]	
Overall Length: 9.5" (24,1 cm)	
Hammer Platform Diameter: 1.125" (2,9 cm)	
Width at End: .75" (1,9 cm)	



Designed by Michael P. O'Reilly, MD
Small version designed modification by Tarun Bhargava, MD

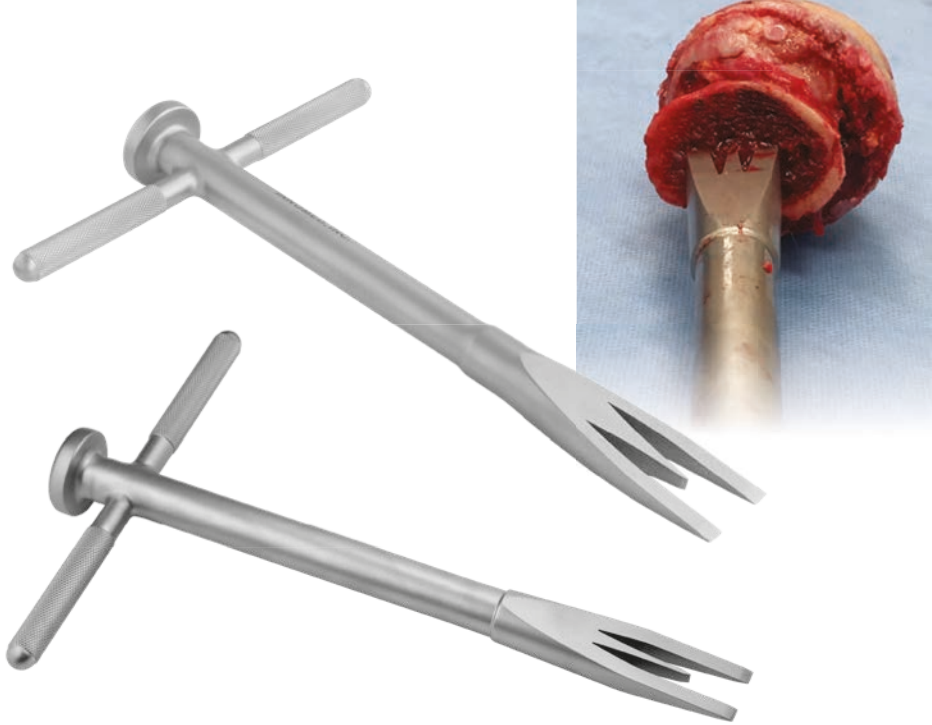


Huddleston Femoral Head Removers

Designed to help lever a femoral head out of the acetabulum in standard and anterior approach total hip replacement

PRODUCT NO'S:	
3608 [Sharp]	
Overall Length: 10.5" (26,7 cm)	
Scoop Length: 3" (7,6 cm)	
Scoop Width: 29 mm	
3609 [Dull]	
Overall Length: 10.5" (26,7 cm)	
Scoop Length: 3" (7,6 cm)	
Scoop Width: 29 mm	

Designed by H. Dennis Huddleston, MD

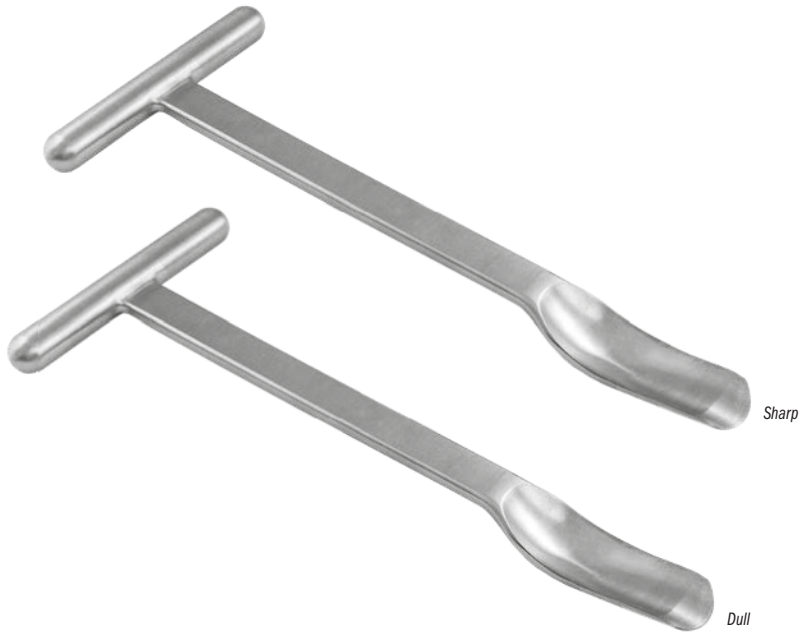

Rivero Anti-Rotation Corkscrew Femoral Head Remover

Designed to help prevent rotation while engaging a femoral head for removal

The sharp-toothed sleeve can be tapped in to help provide purchase of the femoral head, then held to help prevent rotation as the super-threaded corkscrew is turned to engage the head for removal.

PRODUCT NO'S:	
3705 [Corkscrew & Sleeve Set]	
Overall Length: 10" (25,4 cm)	
Individual Instruments:	
3705-01 [Corkscrew Only]	
Overall Length: 10" (25,4 cm)	
3705-02 [Sleeve Only]	
Overall Length: 8" (20,3 cm)	

Designed by
Dennis Rivero, MD



Rivero Extra Grip Femoral Head Removers

Used to remove the femoral head during total hip arthroplasty or fracture surgery

Quick-connect version for use with a driver.

PRODUCT NO'S:

3706 [Zimmer Hall Quick-connect]
Overall Length: 8.5" (21,6 cm)

3707 [T-Handle]
Overall Length: 8.75" (22,2 cm)



Modified by Dennis Rivero, MD

Femoral Head Removers

Used to remove the femoral head during total hip arthroplasty or fracture surgery

Quick-connect version for use with a driver.

PRODUCT NO'S:

3688 [Zimmer Hall Quick-connect]
Overall Length: 8.5" (21,6 cm)

3690 [T-Handle]
Overall Length: 8.75" (22,2 cm)



Verner Corkscrew Femoral Head Remover

Used to remove the femoral head during total hip arthroplasty or fracture surgery

Designed so the threads engage the head under power and draws the corkscrew in until the head begins to turn.

The extra long shaft keeps the power reamer out of the operative site for better visualization and improves the lever arm when pivoting the head out of the acetabulum. The grip ring allows the surgeon to pull head out of acetabulum and soft tissue envelope when disengaged from the driver.

Features a Zimmer Hall Quick-connect for use with a driver.

PRODUCT NO:

3698
Overall Length: 12.25" (31,1 cm)



Designed by James J. Verner, MD & Andy Lytle

Femoral Head Removal Clamp

Firmly locks onto a resected femoral head during total hip, hip fracture, and MIS total hip surgery

Designed to firmly lock onto a resected femoral head during total hip surgery or hip fracture. Narrow design is also useful in minimally invasive total hip surgery with limited access to the femoral head.

PRODUCT NO:

3680
Overall Length: 10.75" (27,3 cm)



Schanz Pin with Zimmer Hall Quick-connect

Used to help remove a femoral head during total hip surgery


Partial threaded pin can be used to help remove a femoral head during total hip surgery. Especially helpful in minimally invasive total hip surgery where access to the femoral head is limited. Connects with a Zimmer Hall Quick-connect.

PRODUCT NO:

3687

Overall Length: 8.625" (21,9 cm)
Shaft Length: 7.375" (18,7 cm)
Thread Length: 2.5" (6,4 cm)
Diameter: 4,5 mm

Designed by Keith Berend, MD

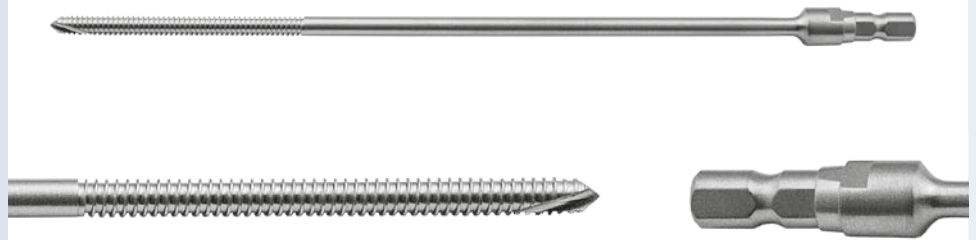

Femoral Head Removal Pin

Used to help remove a femoral head during total hip surgery

Partial threaded pin can be used to help remove a femoral head during total hip surgery. The pin is especially helpful in minimally invasive total hip surgery where access to the femoral head is limited. The pin is attached to a pin driver which clamps onto a Jacob chuck. When the pin is drilled in place, the driver is easily removed from the pin, as the pin is held by a friction ring. The head can be removed by gripping the pin by hand or by using a large pin inserter/extractor.

PRODUCT NO'S:

1310 [Pin]

Overall Length: 9" (22,9 cm)
Diameter: 5/32" (4 mm)

Optional Inserters/Extractors:

1205 [Pin Driver]

3030 [Pin Inserter/Extractor]



Pin Driver



Pin Inserter/Extractor



Angled Capsule Scissors

Angled scissors allow a greater range of capsular access

PRODUCT NO'S:

3079 [45°]

Overall Length: 9.5" (24,1 cm)
Scissor Angle: 45°

3082 [20°]

Overall Length: 10" (25,4 cm)
Scissor Angle: 20°

45° Scissors designed by
James B. Stiehl, MD




Long Bonney Tissue Forceps


Extra length—3" more than standard—allows for use in deep wound areas

PRODUCT NO:

5040

Overall Length: 10" (25,4 cm)

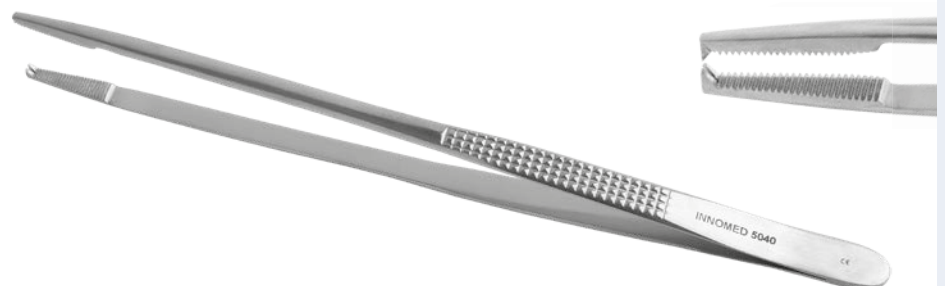





Tapered Jaw



Tapered Narrow Jaw



Square Jaw

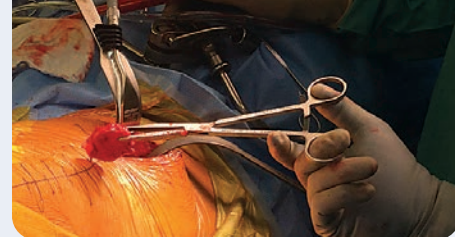

Powers Modified Kocher Clamps

Heavier design allows for a firmer grasping of bone and soft tissues

PRODUCT NO'S:

1813 [Tapered Jaw]
Overall Length: 8.25" (21 cm)
Jaw Length: 2.5" (6,4 cm)
Jaw at End: 5.2 mm x 4.1 mm
1813-01 [Tapered Narrow Jaw]
Overall Length: 8.25" (21 cm)
Jaw Length: 2.5" (6,4 cm)
Jaw at End: 5.2 mm x 3 mm
1814 [Square Jaw]
Overall Length: 8.25" (21 cm)
Jaw Length: 2.5" (6,4 cm)
Jaw at End: 6.5 mm x 5 mm

Designed by
Mark Powers, MD



Bhargava Anterior Hip Labral Grasper

Designed to help remove the labrum and soft tissues in anterior total hip surgery, and very useful in helping to remove posterior osteophytes in knee surgery

PRODUCT NO:

1776
Overall Length: 12.5" (31,8 cm)
Shaft Length: 9" (22,9 cm)
Shaft Width: 7 mm
Jaw Width at End: 4 mm
Toothed Jaw Length: 14 mm



Designed by Tarun Bhargava, MD

Clear Vision Debris Shield

Provides a degree of restriction from flying debris or liquid during surgery

Held between the surgical site and the operating personnel, the shield provides a clear undistorted view, while helping to protect the patient and personnel from possible contamination. The reamer-slotted version allows the shield to straddle a reamer shaft or drill bit, allowing the shield to be closer to the incision. The shield is autoclavable and gas sterilizable in a flat position.

PRODUCT NO'S:

Shield Dimensions: 8" x 10.25" (20,3 cm x 26 cm) (not incl. handle)
8031-01 [Without Reamer Slot]
8033-01 [With Reamer Slot]

Designed by R. Barry Sorrells, MD



Extra Long Rongeur

Helpful in minimally invasive total hip surgery by keeping hands out of the field of view

PRODUCT NO'S:

1771-01

Jaw Bite: 5 x 16 mm

Overall Length: 14" (35,6 cm)

1771-02

Jaw Bite: 8 x 16 mm


Overall Length: 14" (35,6 cm)

1771-03

Jaw Bite: 12 x 16 mm

Overall Length: 14" (35,6 cm)

MADE FOR INNOVED IN
GERMANY

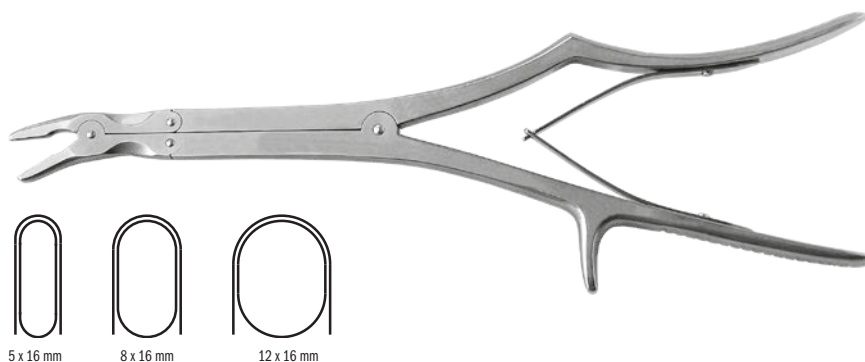

Mazzara Pistol Grip Extra Long Rongeur

Pistol Grip handle lessens hand fatigue and slippage, and allows for better visualization

PRODUCT NO:

1768-02

Jaw Bite: 8 x 16 mm

Overall Length: 12.5" (31,8 cm)

Shaft-to-End Length: 6" (15,2 cm)

Designed by James T. Mazzara, MD



Mazzara Rongeur with Pistol Grip Handle

Pistol Grip handle lessens hand fatigue and slippage, and allows for better visualization

PRODUCT NO'S:

1765-01

Jaw Bite: 5 x 14 mm

Overall Length: 10" (25,4 cm)

1765-02

Jaw Bite: 7 x 16 mm


Overall Length: 10" (25,4 cm)

1765-03

Jaw Bite: 10 x 16 mm

Overall Length: 10" (25,4 cm)

Designed by James T. Mazzara, MD

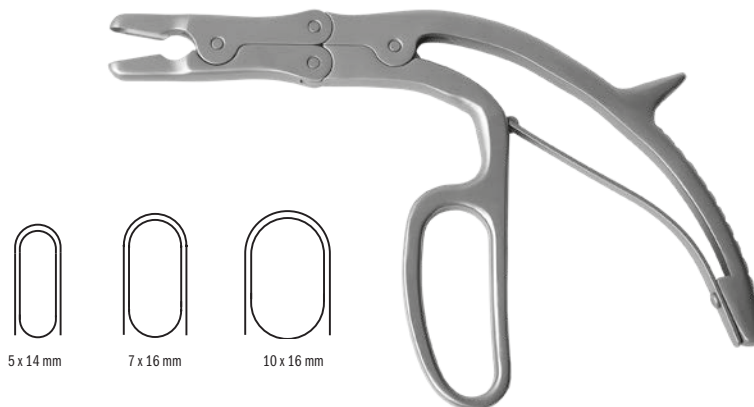

Ortho Rongeur with Easy Grip Handle

Offset handle lessens hand fatigue and slippage, and allows for better visualization

Offset handle gives better gripping power and helps reduce hand fatigue. Finger grooves help to prevent hand slippage. The offset handle also allows for better visualization. Available in three jaw bite sizes.

PRODUCT NO'S:

1780-01

Jaw Bite: 5 x 14 mm

Overall Length: 8.75" (22,2 cm)

1780-02

Jaw Bite: 7 x 16 mm

Overall Length: 8.75" (22,2 cm)

1780-03

Jaw Bite: 10 x 16 mm

Overall Length: 8.75" (22,2 cm)





Modified Rongeur with Pistol Grip Handle

A thin top cutter and deep lower cutter, with edges that are rounded off, allows the top cutter to slide into a tight space—specifically the acetabulum or the patella—while the pistol grip helps lessen hand fatigue and slippage, and allows for better visualization

PRODUCT NO:

1765


Jaw Bite Length: 18 mm

Jaw Bite Width: Tapered from 7 to 4.5 mm

Overall Length: 10" (25,4 cm)



Design modification by Morteza Meftah, MD and Ira Kirschenbaum, MD, of an original design by James T. Mazzara, MD.

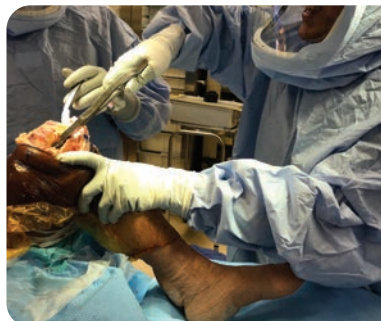

New!

NARROW, TAPERED JAW VERSION

Hannum Modified Angled Grasper

Heavy duty large bone grasper designed to help trim acetabular osteophytes – angled to ergonomically fit around the rim via the direct anterior approach

PRODUCT NO:

1775-04

Overall Length: 8.5" (21,6 cm)

Jaw Width: 11 mm

Jaw Bite Internal: 9 mm x 21 mm



Designed by Scott Hannum, MD



Jaw widths at actual size



3 mm 5 mm 8 mm

Hannum Grasper

Teeth in jaw firmly holds bone and tissue

Non-locking design can be easily gripped while allowing greater pressure to be applied.

Used for dissection(to preserve)/or removal of the anterior capsule, removal of the labrum, or other soft tissue around the acetabulum prior to cup implantation. Also used to release the capsule to expose the femur for placement of the femoral stem. Long, low profile helps facilitate working through a small incision without disrupting vision.

Available in three jaw sizes: short jaw for holding bone, medium jaw for smaller bones, and long jaw for tissue.

PRODUCT NO'S:

1775-01 [Short Jaw]

Jaw Width: 8 mm

Overall Length: 9.25" (23,5 cm)

1775-02 [Medium Jaw]

Jaw Width: 5 mm

Overall Length: 9.25" (23,5 cm)

1775-03 [Long Jaw]

Jaw Width: 3 mm

Overall Length: 9.25" (23,5 cm)

Designed by Scott Hannum, MD



Long Jaw Rongeur Shown

Mongold Capsule Knife

Designed to reach behind the femoral head to release the capsule ligament

PRODUCT NO:

4115
Overall Length: 7.75" (19,7 cm)
Blade Diameter: 2" (5,1 cm)
Blade Width: .5" (1,3 cm)



Designed by Evie Mongold, MD



Wagner Osteotome Handle

Handle is designed for easier gripping, rotational control, and use with a mallet with a standard 1/4" Lambotte osteotome

Osteotome not included.

PRODUCT NO'S:

5348 [Handle Only]
Overall Length: 5.5" (14 cm)
5348-01 [1/4" Osteotome Only]
Overall Length: 8.875" (22,5 cm)

Handle designed by
Russell Wagner, MD



Modified Lambotte Osteotomes

Designed with a striking platform, plus a cross-bar hole to help control rotational stability and assist with removal

Six sizes from 1/4" to 1-1/2" in 1/4" increments. Cross-bar and case included in set. Two smallest sizes have an 1/8" hole in which an 1/8" pin can be used as a cross bar (not included).

PRODUCT NO'S:

5350-00 [Set w/Case]
Also Available Individually:
5350-25 [1/4"]
Overall Length: 9" (22,9 cm)
Osteotome Width: .25" (6,4 mm)
5350-50 [1/2"]
Overall Length: 9" (22,9 cm)
Osteotome Width: .5" (12,7 mm)
5350-75 [3/4"]
Overall Length: 9" (22,9 cm)
Osteotome Width: .75" (19 mm)
5350-100 [1"]
Overall Length: 9" (22,9 cm)
Osteotome Width: 1" (25,4 mm)
5350-125 [1-1/4"]
Overall Length: 9" (22,9 cm)
Osteotome Width: 1.25" (31,8 mm)
5350-150 [1-1/2"]
Overall Length: 9" (22,9 cm)
Osteotome Width: 1.5" (38,1 mm)
5350-CASE [Case]
Dimensions: 12.25" x 11.25" x 1"
(31,1 x 28,6 x 2,5 cm)
5350-CB [Cross Bar]
Overall Length: 4.375" (11,1 cm)



Cement Packer & Trimmer

PRODUCT NO:

4995
Overall Length: 9.75" (24,8 cm)

Designed by Harlan C. Amstutz, MD

MADE FOR INNOMED IN
GERMANY





Chandran Bent Serrated Curette

Serrated design allows for easier removal of cancellous bone in the proximal femur in total joint arthroplasty

PRODUCT NO:

5171
Overall Length: 11.75" (29,8 cm)
Handle Length: 5.5" (14 cm)
Cup Size: 7 mm X 12 mm

Designed by Rama E. Chandran, MD



Mueller Style Hip Instruments

PRODUCT NO'S:

6865-01 [Flat Blade Osteotome]
Overall Length: 11.125" (28,3 cm)
Osteotome Width: 20 mm

6865-02 [Femoral Head Dislocation Lever]
Overall Length: 11.375" (23,8 cm)
Scoop Dimensions: 25 mm x 57 mm

6865-03 [Narrow Curved Osteotome]
Overall Length: 12" (30,5 cm)
Osteotome Width: 9 mm

6865-04 [Wide Curved Osteotome]
Overall Length: 12" (30,5 cm)
Osteotome Width: 16 mm

6865-05 [Swan Neck Curved Gouge]
Overall Length: 12" (30,5 cm)
Gouge Width: 23 mm

5350-CB [Cross Bar]



Lambotte Osteotomes with Handle

Handle allows for better control, reducing rotation during use



The handle also provides a larger striking area for use with a mallet. Stainless steel shafts available both straight and curved.

PRODUCT NO'S:

Designed by John Cherf, MD

5250-01 [Straight]
Blade Width: .25" (6,3 mm)
Overall Length: 13" (32,8 cm)
Handle Length: 4.5" (11,4 cm)

5260-01 [Curved]
Blade Width: .25" (6,3 mm)
Overall Length: 13" (32,8 cm)
Handle Length: 4.5" (11,4 cm)



Curette Ends at Actual Size

Large Bone Curettes

Designed with a 8 mm diameter shaft allowing better visualization into the medullary canal

The contoured handle is designed to keep the curette from slipping in the surgeon's hand and for better control. The Angled Large Curette is designed for use in the acetabulum or exposed bone. The 10.5" (26,7 cm) shaft is 5/16" (8 mm) in diameter and has a contoured handle.

PRODUCT NO'S:

5160 [Set with Case]

Individual Instrument Dimensions:
Overall Length: 15" (38,1 cm)
Handle Length: 4.5" (11,4 cm)

5160-01 [Angled Small]
Curette End: 10 mm X 18 mm

5160-02 [Straight Small]
Curette End: 10 mm X 18 mm

5160-03 [Angled Medium]
Curette End: 10 mm X 24 mm

5160-04 [Angled Large]
Curette End: 24 mm X 24 mm

5160-05 [Straight Medium]
Curette End: 10 mm X 24 mm

9004 [Case]



Paprosky Acetabular Spreader

Designed to distract an acetabular discontinuity


PRODUCT NO:

1879

Overall Length: 12" (30,5 cm)
Pads: 14 mm x 22 mm



Designed by Wayne Paprosky, MD

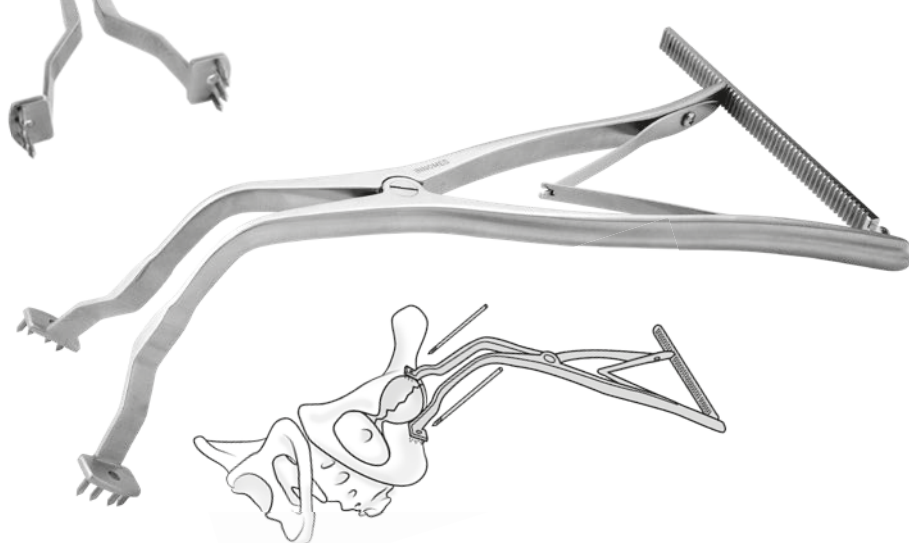

Offset Punches

Helps in the removal of hip stems

Used to help remove a hip prosthesis stem via a window in the shaft of the femur. Two sizes of offsets allow the punches to be used to tap on a distal portion of the hip stem, after a window has been made in the femur below the tip of the stem.

PRODUCT NO'S:

5125-02 [Large Offset]

Overall Length: 11" (27,9 cm)

Punch End Offset: 32 mm

Punch End Diameter: 7 mm

5125-01 [Small Offset]

Overall Length: 11" (27,9 cm)

Punch End Offset: 13 mm

Punch End Diameter: 7 mm



Browner Wire Tightener

Wire is passed through the distal arm hole and into the separate drum holes, and can then be tightened and rotated before being cut with a wire cutter

PRODUCT NO:

8251

Overall Length: 6" (15,2 cm)

Width: 3.75" (9,5 cm)

Wire Hole Diameters: .125" (3,2 mm)



Designed by Bruce D. Browner, MD



DMP Wire Tightener

Used to hand tighten a cerclage wire around a bone

Now with four wire holes — two for up to 20 gauge wires, and two for up to 18 gauge wires. T-Handle end is used to hand tighten a wire.

PRODUCT NO:

8729

Overall Length: 4.5" (11,4 cm)

Handle Width: 2.625" (6,7 cm)

End Diameter: 15 mm



Designed by DMP

Whelan Double-Ended Suture Wire Passer

Passer guide and malleable passer designed to pass suture wires around a bone


The passer guide is placed around the bone, and the thin malleable passer is inserted at the handle end and follows the grooved passer around. The suture wire (up to 18 gauge) is attached to the keyholed end of the passer, which can then be reversed out of the passer, drawing the suture wire around the bone.

PRODUCT NO'S:	
8300-00	[Set]
Also available individually:	
8300-01	[Passer Guide]
Overall Length: 8.125" (20,6 cm)	
Outside Width: 9 mm	
Inside Groove Width: 6.5 mm	
8300-02	[Passer]
Overall Length: 7.5" (19,1 cm)	
Width: 4.6 mm	
1025	[Sterilization Case]

Designed by E. J. Whelan, III, MD



Set includes Passer Guide, two Passers, and a sterilization case.

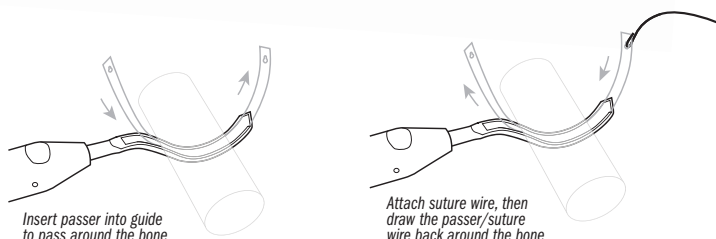

Incavo Wire Passer

Used for passing multiple cerclage wires around bone

Designed to pass multiple cerclage wires around a bone during a multiple wire wrap procedure.

PRODUCT NO'S:	
8610-01	[Small]
Overall Length: 7.5" (19,1 cm)	
Accepts Wire Up To: 4 mm (5/32")	
8610-02	[Large]
Overall Length: 8.675" (21,3 cm)	
Accepts Wire Up To: 4 mm (5/32")	

Designed by Stephen J. Incavo, MD




Femoral Extraction Instruments

Designed to help in the removal of various types of femoral implants



PRODUCT NO'S:	
S1202	[Loop Extractor with Standard Slap Hammer #3925]
S1202-01	[Loop Extractor Only]
Overall Length: 6.5" (16,5 cm)	
S1203	[J-Hook Extractor with Standard Slap Hammer #3925]
S1203-01	[J-Hook Extractor Only]
Overall Length: 4.75" (12,1 cm)	
S1204	[One-Piece Extractor with Standard Slap Hammer #3925]
S1204-01	[One-Piece Extractor Only]
Overall Length: 4.125" (10,5 cm)	
3925	[Standard Slap Hammer]
3/8"-16 Thread Gauge	
Optional:	
3935	[Extra Large Slap Hammer]
3/8"-16 Thread Gauge	

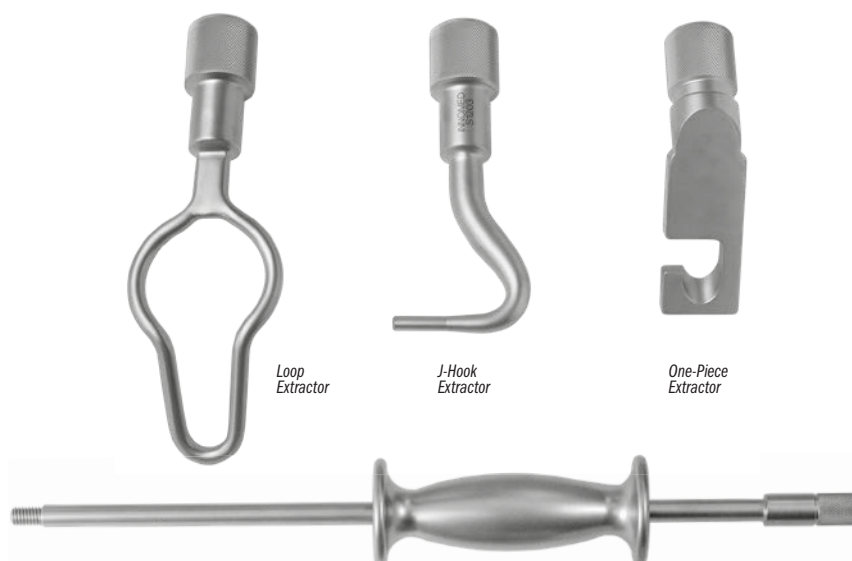


Whelan Hip Stem Extractor

Designed to lock onto and remove a femoral hip stem after the modular head has been removed

Extraction normally requires two bolts to be used to clamp onto, tighten, and extract the component. Four bolt holes, distributed evenly around the stem extractor, allow the surgeon to choose which holes will offer optimal access for placing and tightening the bolts.

PRODUCT NO'S:	
4175-00	[Complete Set]
Individual/Replacement Parts:	
4175-01	[Stem Extractor 13.5 mm]
4175-W	[Stem Extractor Wrench]
4175-03	[Replacement Bolts] Pair
3925	[Std. Slap Hammer] 3/8"-16 Thread Gauge



Easy Grip Slap Hammer

Designed to help cushion the surgeon's hand



PRODUCT NO'S:	
3926	[Slap hammer with 16" Rod]
Also available individually:	
3925-HS	[Slap hammer only]
3925-A	[16" Rod only]



Extractor Set Includes:
Stem Extractor, Wrench, (4) Bolts, Standard Slap Hammer


Whelan Extractor Strike Plate Attachment

A slap hammer alternate for extraction help


After attaching the unit to the extractor using the replaceable screw, the strike plate can be struck with the full force of a mallet to assist with component extraction.

PRODUCT NO'S:	
3605-00	[Attachment Set]
Individual/Replacement Parts:	
3605-01	[Strike Plate Unit Only] Overall Length: 16" (40,6 cm) Platform Size: 2" x 2" (5,1 cm x 5,1 cm)
3605-02	[Screws] Pair


Designed by
E. J. Whelan, III, MD

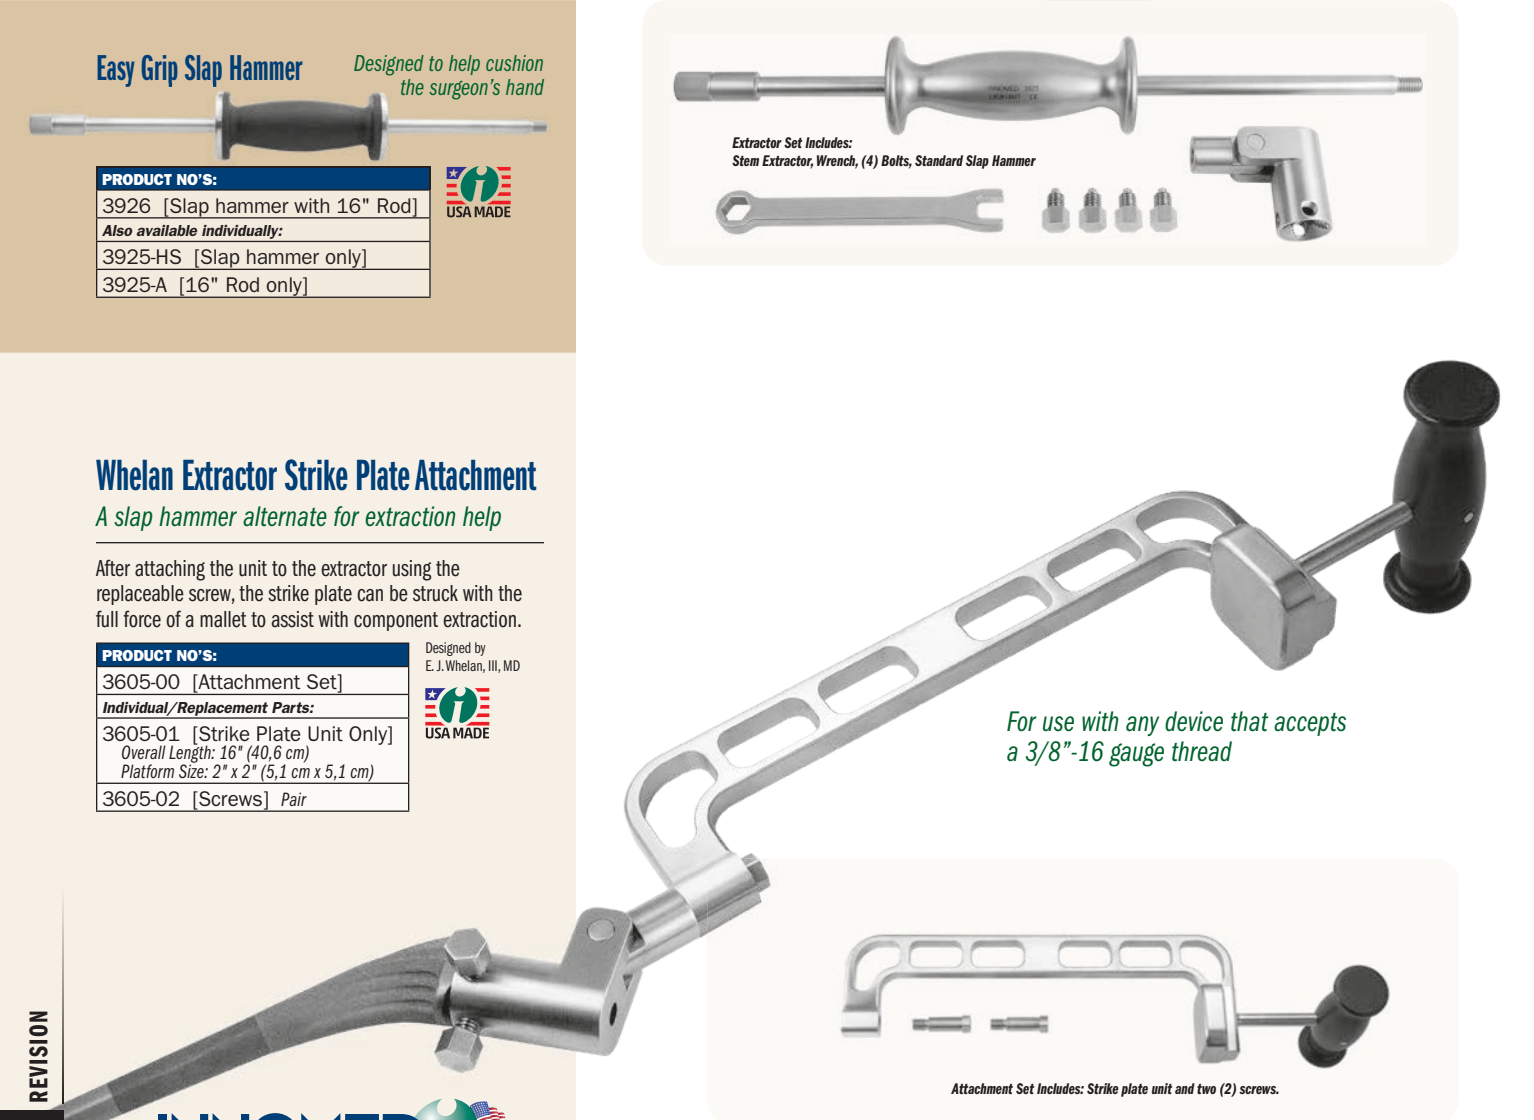

For use with any device that accepts a 3/8"-16 gauge thread

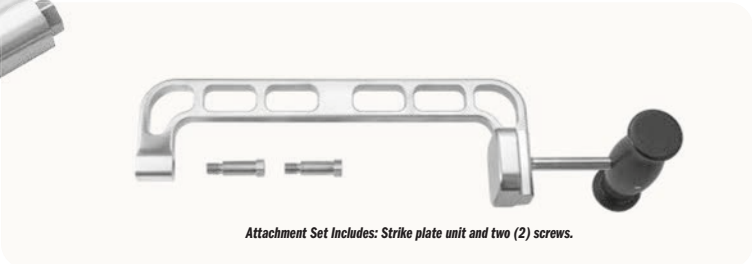

Attachment Set Includes: Strike plate unit and two (2) screws.

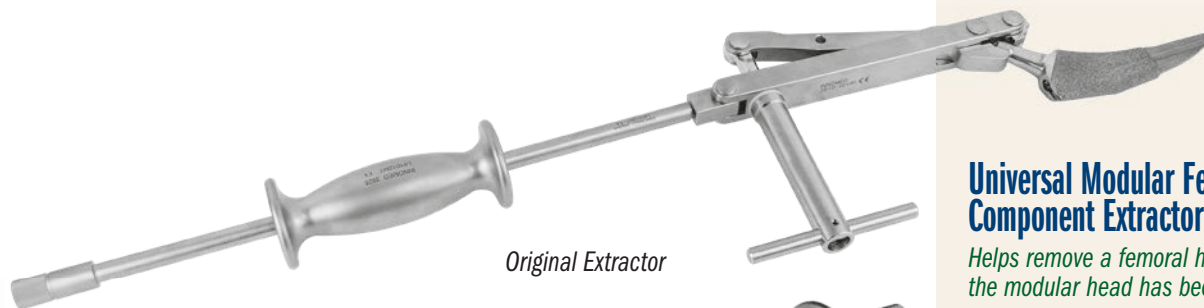

Original Extractor

Anterior Approach Extractor
Extractor with the handle
reversed designed primarily for
anterior approach

Universal Modular Femoral Hip Component Extractor

Helps remove a femoral hip stem after the modular head has been removed



Designed to clamp onto the taper of a femoral hip stem after the modular head has been removed. The extractor is equipped with a swivel block for attachment of a slap hammer. The swivel block helps keep the slap hammer in line with the angle of the femoral stem. Includes standard slap hammer, #3925.

PRODUCT NO'S:

3610 [Original Extractor with Standard Slap Hammer #3925]

3610-R [Anterior Approach Extractor with Standard Slap Hammer #3925]


Optional/Individual Parts:

3610-01 [Original Extractor Only]


3610-R-01 [Anterior Approach Extractor Only]

3925 [Standard Slap Hammer]
3/8"-16 Thread Gauge


3935 [Extra Large Slap Hammer]
3/8"-16 Thread Gauge

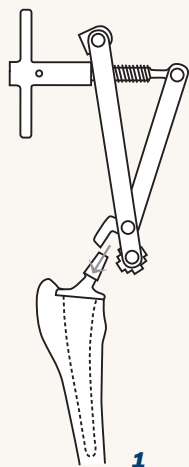


1

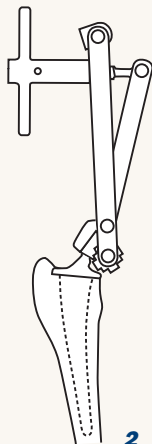

2

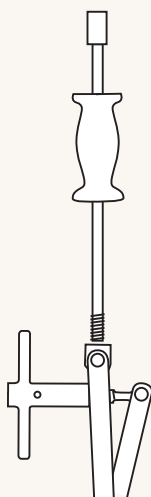

3



4

1 Open Extractor Jaws

The extractor is opened to accommodate any size taper on a modular head total hip stem.

2 Use T-Handle To Clamp Onto Taper

The taper is clamped between the rotating block and the taper anvil. Tightening the "T" handle holds a stem taper in place.

3 Attach Slap Hammer

The slap hammer is screwed into the swivel block. The slap hammer can be aligned with the stem utilizing the swivel block.

4 Use Slap Hammer To Remove Component

Extraction is carried out by the slap hammer or by utilizing a mallet on the hammer flares of the slap hammer.




Standard and Extra Large Slap Hammers

For use with any device that accepts a 3/8"-16 gauge thread

PRODUCT NO'S:

3925 [Standard Slap Hammer]
3/8"-16 Thread Gauge

3935 [Extra Large Slap Hammer]
3/8"-16 Thread Gauge

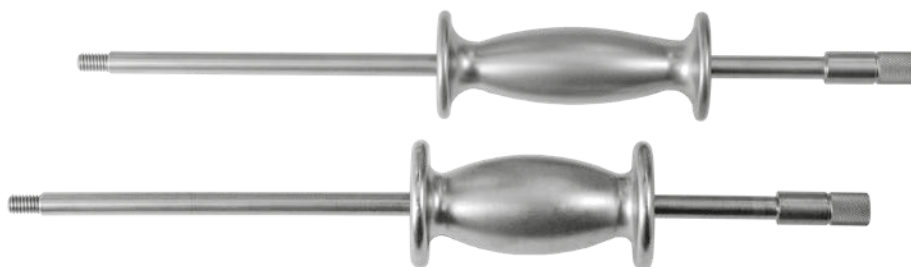

Heck Anterior Modular Hip Component Extractor with Strikeplate

Strikeplate provides additional help to remove a femoral hip stem

In this process of placing the extractor over the neck and tightening the locking screw, the upper flange surface of the strikeplate can be hit to help engagement. The inferior flange surface of the strikeplate can be hit in a vertical fashion when the femoral component is particularly well engaged. The extractor is equipped with a swivel block for attachment of a slap hammer. The swivel block helps keep the slap hammer in line with the angle of the femoral stem. Includes standard slap hammer, #3925.

PRODUCT NO'S:

3611 [Extractor w/Std. Slap Hammer #3925]


Optional/Individual Parts:

3611-01 [Extractor Only]

3925 [Standard Slap Hammer]
3/8"-16 Thread Gauge

3935 [Extra Large Slap Hammer]
3/8"-16 Thread Gauge

Designed by David Heck, MD

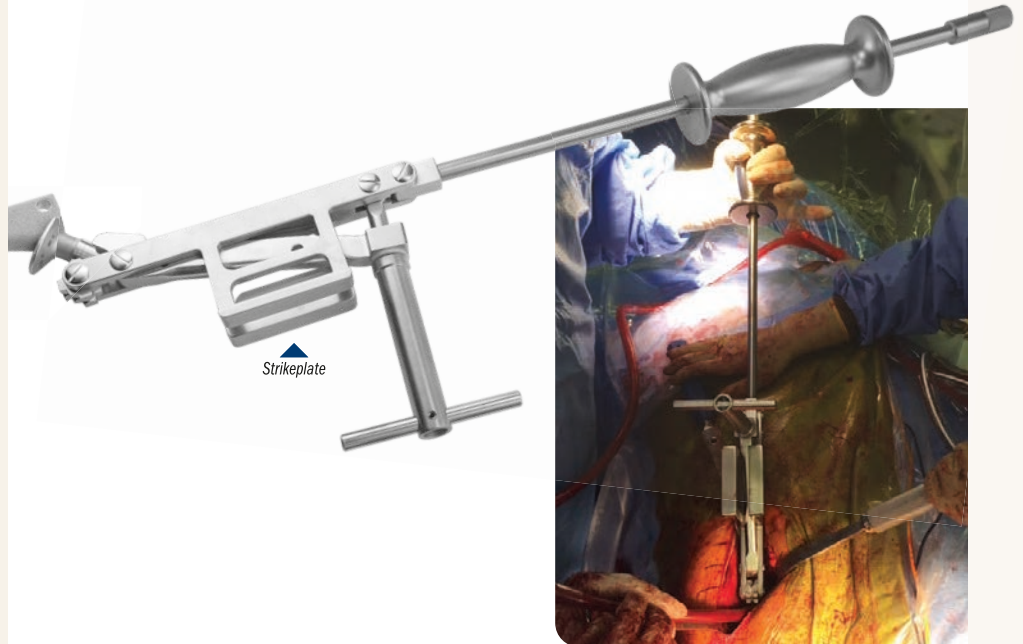

Anterior Femoral Punches

Designed with a delrin pad to help protect the femoral stem trunion while removing the femoral head during anterior approach total hip revision arthroplasty

- ▶ Three stem angles allow choice of optimal approach
- ▶ Angled punches allow for better striking force to help break the taper of the head and stem
- ▶ The delrin pad helps prevent scratching of the femoral stem trunion





PRODUCT NO'S:

8626-A [Angled Up]
Overall Length: 8.75" (22.2 cm)
Up Angle: 40°

8626-L [Left]
Overall Length: 9" (22.9 cm)
Left Angle: 40°

8626-R [Right]
Overall Length: 9" (22.9 cm)
Right Angle: 40°

Designed by Brandon Thompson, CST/CFA



Femoral Head Disengaging Punch

Designed to help protect the femoral stem trunion while removing the femoral head


The delrin pad helps prevent scratching of the femoral stem trunion. The punch angle allows for better striking force to help break the taper of the head and stem.


PRODUCT NO:

8626
Overall Length: 9" (22.9 cm)
Shaft Diameter: .5" (12.7 mm)
Punch Platform Offset Angle: 30°
Punch Platform Delrin End: 10 mm x 20 mm




Designed by Brandon Thompson, CST/CFA

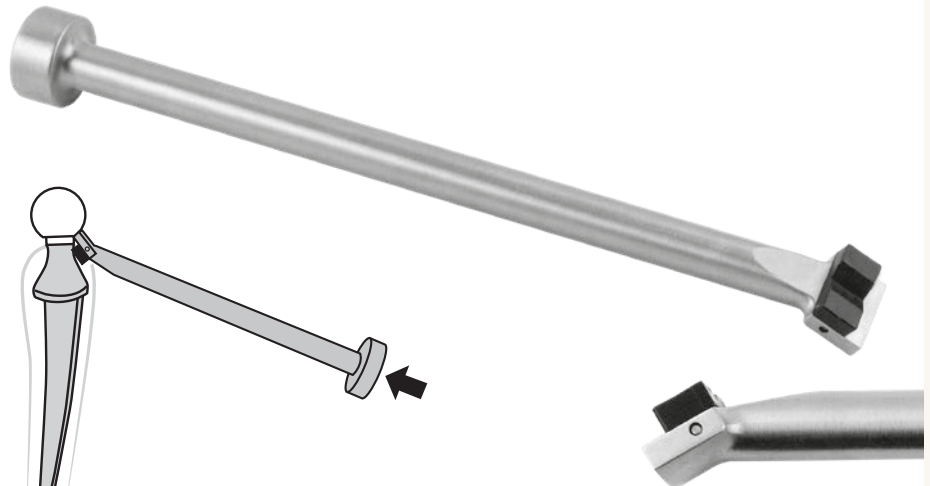


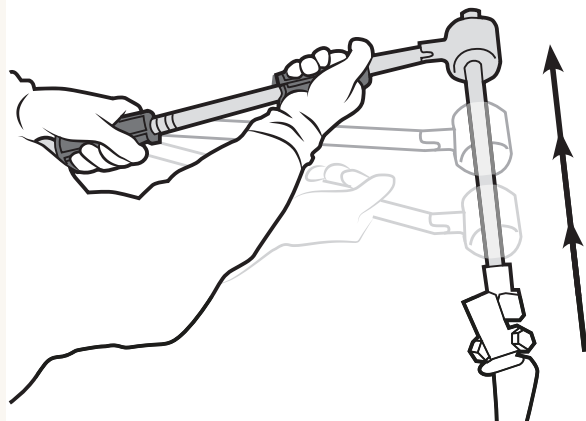

With the long Super Slap Hammer, two handed force can be used to power the drive weight from bottom to top along the entire length of the slap hammer rod

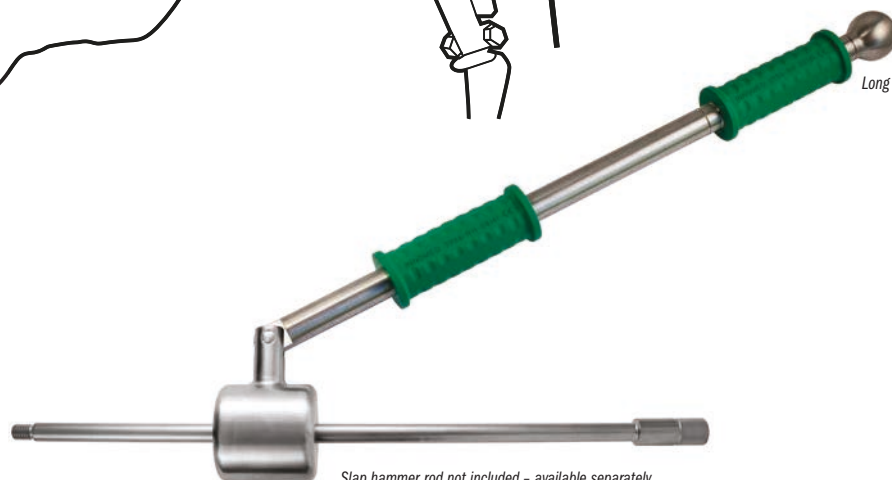

Slap hammer rod not included - available separately.

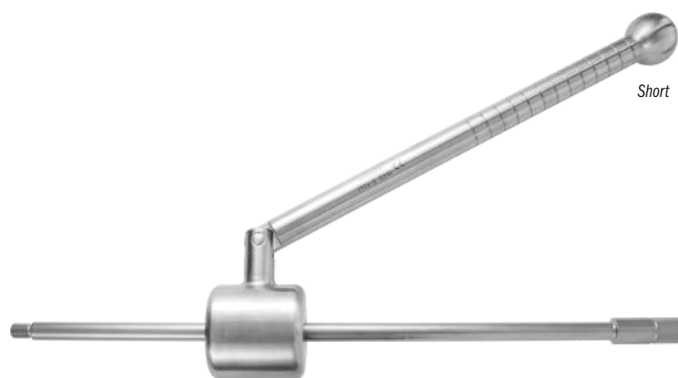

Atlatl Super Slap Hammer

Designed for when extra powerful slap hammer force is needed

Repositionable silicone grip handles are available for use with the long version of the Atlatl, and are removable for sterilization.



PRODUCT NO'S:

3924-L-00 [Long with Silicone Handles]

Overall Length: 22" (55,8 cm)

Includes (2) 3924-RH Silicone Grip Handles.

Slap hammer rod not included.

3924-L [Long without Handles]

Overall Length: 22" (55,8 cm)

Slap hammer rod not included.

3924-S [Short]

Overall Length: 16" (40,7 cm)

Slap hammer rod not included.

3924-RH [Silicone Grip Handle]

Overall Length: 4" (10,2 cm)

(One handle only with this product number)

3925-A [16" Slap Hammer Rod only]

(Rod only with this product number)



Slap hammer rod not included - available separately.

For use with a 3/8" diameter slap hammer rod, including the Innomed #3925 & #3935 slap hammers on the following extraction instruments:

Hip - Femoral Component

- 3610 Universal Modular Hip Component Extractor - Standard
- 3610-R Universal Modular Hip Component Extractor - Anterior
- 3611 Heck Anterior Modular Hip Component Extractor
- 4175-00 Whelan Hip Stem Extractor
- S1202 Femoral Extraction Instrument - Loop
- S1203 Femoral Extraction Instrument - J-Hook
- S1204 Femoral Extraction Instrument - One-Piece

Hip - Acetabular Cup/Shell/Liner

- 3638-00 Lombardi Hip Cup Liner/Shell Extractor
- 3665 Gorski Hip Cup Extraction Hook - 5.0 mm

Knee

- 3630 Tibial Knee Component Extractor
- 3920 Femoral Knee Component Extractor
- 3650 4 mm Tibia Tray Removal Hook
- 3655 8 mm Tibia Tray Removal Hook

Shoulder

- 3670 Nicholson Universal Humeral Prosthesis Extractor

General

- 3966 Large Bent Jaw OrthoVise

Easy Grip Slap Hammer

Textured silicone hammer designed to help cushion the surgeon's hand and maintain a solid grip

The textured silicone hammer helps to reduce the shock forces on the surgeon's hand during extraction procedures, and helps the surgeon to maintain a solid grip and prevent the hand from slipping.

PRODUCT NO'S:

3926 [Slap hammer with 16" Rod]

Also available individually:

3925-HS [Slap hammer only]

3925-A [16" Rod only]




Lombardi Hip Cup Liner/Shell Extractor

Used for removal of a total hip cup or liner

Expandable flanges are designed to bite into the polyethylene of a total hip cup. When the flanges have been expanded, a slap hammer is screwed into the extractor for removal. The extractor can also be used for removal of a metal hip cup shell if the shell has a groove around the rim for the flanges to lock into. Also very helpful for cemented cup extraction. Set includes standard slap hammer #3925.

PRODUCT NO:
3638-00 [Set]
Also Available Individually
3638-01 [Remover Only] Overall Length: 9.5" (24,1 cm)
3925 [Standard Slap Hammer] 3/8"-16 Thread Gauge

Designed by
Adolph V. Lombardi, MD

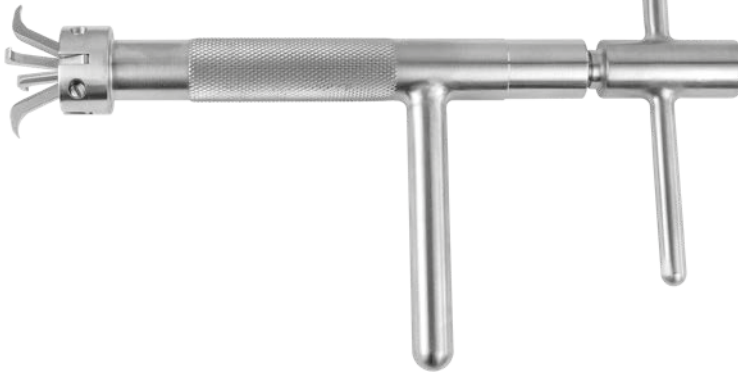

Easy Grip Slap Hammer

Designed to help cushion the surgeon's hand

PRODUCT NO'S:
3926 [Slap hammer with 16" Rod]
Also available individually:
3925-HS [Slap hammer only]
3925-A [16" Rod only]



Poly Cup Liner Removal Drill



Threaded, aggressive, drill tipped tool designed to facilitate removal of an acetabular liner

When the flat-ended drill end reaches the metal of the acetabular cup, continue drilling and the liner will become engaged in the drill flutes and back off for removal.

PRODUCT NO:
4052 Overall Length: 6" (15,2 cm)



Designed by Keith R. Berend, MD

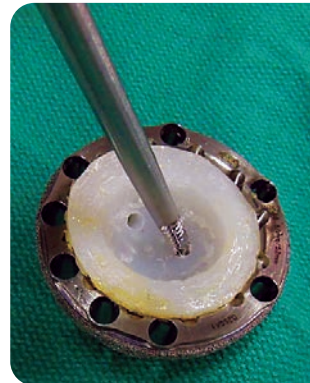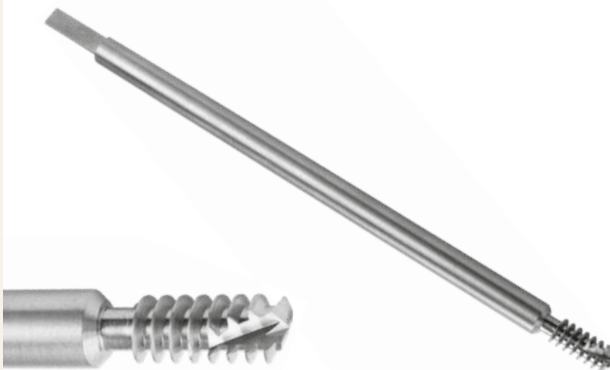

Gorski Hip Cup Extraction Hook

Helps in the removal of a hip cup

Fits into a screw hole of a hip cup after the screws have been removed and the cup loosened. The slap hammer helps to remove the cup in the angle it was inserted.

PRODUCT NO'S:
Hook for 5.0 mm Screw Holes
3665 [Hook w/Standard Slap Hammer]
3665-01 [Hook w/o Slap Hammer]
Optional:
3935 [XL Slap Hammer] 3/8"-16 Thread Gauge

Designed by Jerrold Gorski, MD



Star Metal Cup Liner Removal Impactor

Designed to help disengage the rim of a metal cup for removal

Low profile design can be used through a limited incision. Vibration from tapping the edge of the shell helps cause the liner to become disengaged for removal.

PRODUCT NO:

5014

Overall Length: 8" (20,3 cm)



Designed by Andrew M. Star, MD



Kudrna Hip Stem Taper Protectors

Used to cover and protect the hip stem taper of a femoral component – especially helpful in cup revision surgery

PRODUCT NO'S:

1151 [11/13]

1152 [12/14]

1153 [14/16]

Designed by James Kudrna, MD



Lombardi Taper Cleaner

Designed to help clean a hip stem taper of corrosive byproducts prior to placement of the new femoral head

PRODUCT NO'S:

Overall Length: 2.125" (5,4 cm)
Outside Diameter: 1" (2,54 cm)

8034 Short Taper 11/12 mm


8034-01 Long Taper 11/13 mm

8035-01 11/13 mm

8035-02 12/14 mm

8035-03 14/16 mm

Designed by
Adolph V. Lombardi Jr., MD

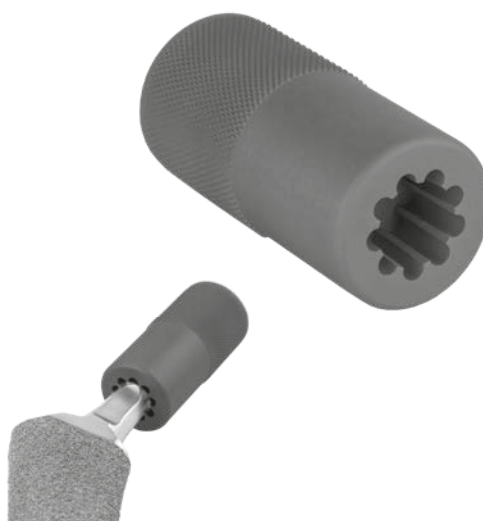


CupX Blade Contour Checking Templates

Designed for checking the contour of a CupX blade after use to evaluate arc accuracy

INDIVIDUAL CONTOUR TEMPLATES

5200-T [Complete Set]	
5200-42G 42 mm	5200-62G 62 mm
5200-44G 44 mm	5200-64G 64 mm
5200-46G 46 mm	5200-66G 66 mm
5200-48G 48 mm	5200-68G 68 mm
5200-50G 50 mm	5200-70G 70 mm
5200-52G 52 mm	5200-72G 72 mm
5200-54G 54 mm	5200-74G 74 mm
5200-56G 56 mm	5200-76G 76 mm
5200-58G 58 mm	5200-78G 78 mm
5200-60G 60 mm	5200-80G 80 mm
	5200-GR Ring






acetabular cup extraction system

Helps to quickly and precisely remove an acetabular cup with minimal loss of bone

COMPLETE INSTRUMENT SETS

5200 Complete Set - Fixed Handle
5208 Complete Set - Wrench Handle

20 Starter & 20 Finish Instruments
3 each of 5 Head sizes (22mm-36mm)
5 cases — 4 for Instruments, 1 for Heads
Includes complete set of 5200-T CupX Blade
Contour Checking Templates, plus Ring

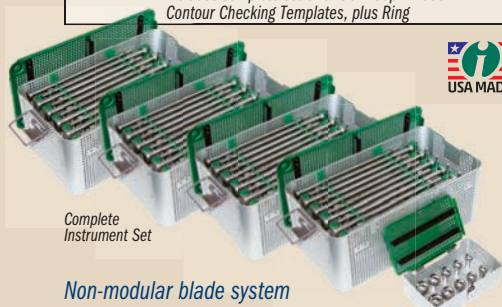

Complete Instrument Set

Non-modular blade system helps reduce both cost and surgical time, as blades don't need to be changed interoperatively

CUSTOM AND RANGED INSTRUMENT SETS

5200-01 Choice of sizes - Fixed Handle
5208-01 Choice of Sizes - Wrench Handle

5 Starter and 5 Finish Instruments
2 each of 5 Head sizes (22mm-36mm)
2 cases — 1 for Instruments, 1 for Heads
Includes CupX Blade Contour Checking Templates
for corresponding Blade Sizes Chosen, plus Ring

5200-02 42mm-50mm - Fixed Handle
5208-02 42mm-50mm - Wrench Handle

5 Starter and 5 Finish Instruments
2 each of 5 Head sizes (22mm-36mm)
2 cases — 1 for Instruments, 1 for Heads
Includes CupX Blade Contour Checking Templates
for 42 mm - 50 mm Blades, plus Ring

5200-03 52mm-60mm - Fixed Handle
5208-03 52mm-60mm - Wrench Handle


5 Starter and 5 Finish Instruments
2 each of 5 Head sizes (22mm-36mm)
2 cases — 1 for Instruments, 1 for Heads
Includes CupX Blade Contour Checking Templates
for 52 mm - 60 mm Blades, plus Ring

5200-04 62mm-70mm - Fixed Handle
5208-04 62mm-70mm - Wrench Handle

5 Starter and 5 Finish Instruments
2 each of 5 Head sizes (22mm-36mm)
2 cases — 1 for Instruments, 1 for Heads
Includes CupX Blade Contour Checking Templates
for 62 mm - 70 mm Blades, plus Ring

5200-05 72mm-80mm - Fixed Handle
5208-05 72mm-80mm - Wrench Handle

5 Starter and 5 Finish Instruments
2 each of 5 Head sizes (22mm-36mm)
2 cases — 1 for Instruments, 1 for Heads
Includes CupX Blade Contour Checking Templates
for 72 mm - 80 mm Blades, plus Ring



Custom/Ranged Instrument Set

Optional Wrench Drive Handles

Works like a socket wrench, allowing improved torque without changing positions.

Optional Large Delrin Heads*

Designed to provide tight, secure surface contact when removing larger size acetabular cups, and can also be used if the cup liner of a standard size cup is worn and must be removed. Available in diameters from 39 to 60 mm in 1 mm increments.

1 Stainless Steel Heads

In standard diameters of 22, 26, 28, 32 and 36 mm (38 mm optional).

2 Non-modular Blade System

Helps to decrease costs while increasing surgical efficiency as blades don't need to be changed interoperatively.

3 Fixed Blades in Two Lengths

Can typically be used for several procedures, then can be returned to Innomed for nominal replacement charge.

4 Shaft Alignment

The shaft is aligned directly over the head, which helps prevent the head from riding out of the cup while keeping the instrument properly centered. With proper centering, the curvature of the blades will more closely match the hemispherically-shaped outer surface of the acetabular cup when rotating, thus minimizing bone loss and creating a relatively intact acetabular recess for fitting of a new cup.

5 Handle Styles

Two handle styles to choose from—Wrench Drive or Fixed.

6 Impaction Platform

Strike with a mallet to help drive in the blade.

7 Handle Placement

Near the end of the shaft allows for better leverage and easier rotation.

Starter Blade

3

Finish Blade

6

5

7

System Rental Available On A Single Procedure Basis

Rental Details

Rental is available in several configurations:

- 4 cases with all sizes, including 2 sets of heads
- 3 cases, including 2 sets of heads
- 2 cases, including 2 sets of heads
- 1 case, including 2 sets of heads
- 1 size (starter & finish), including 2 sets of heads

Each case includes 5 Starter and 5 Finish Instruments

Rental Charges


In addition to a rental fee, there is a charge for each instrument used (not heads). Also, an additional charge applies if the used instruments are kept instead of returned. **Rental is for one surgical procedure only, and must be returned within 5 days following the procedure.**



Fully Customizable Sets

Rent or purchase — configure with as few or as many options required.

*US Patent #7,998,146 B2



ultra hard titanium nitride coating for extended blade life

Benefits of Our Titanium Nitride Coated Blades

- ▶ **Extends Blade Life...**
by increasing surface hardness
- ▶ **Prolongs Sharpness...**
with an ultra hard, heat resistant coating
- ▶ **More Wear Resistant...**
due to high lubricity of titanium nitride coating
- ▶ **Prevents Galling...**
won't chip, peel, or flake
- ▶ **Reduces Friction...**
eliminates seizing in metal-on-metal contact
- ▶ **Chemical and Corrosion Resistant**
- ▶ **Non-toxic...**
medically approved and proven

Extended blade life leads to long term savings

INDIVIDUAL FIXED HANDLE SHAFTS WITH FIXED BLADES				
New Instrument		Exchange Instrument		Blade Arc Diameter
Starter	Finish	Starter	Finish	
5200-42	5201-42	5205-42	5206-42	42 mm
5200-44	5201-44	5205-44	5206-44	44 mm
5200-46	5201-46	5205-46	5206-46	46 mm
5200-48	5201-48	5205-48	5206-48	48 mm
5200-50	5201-50	5205-50	5206-50	50 mm
5200-52	5201-52	5205-52	5206-52	52 mm
5200-54	5201-54	5205-54	5206-54	54 mm
5200-56	5201-56	5205-56	5206-56	56 mm
5200-58	5201-58	5205-58	5206-58	58 mm
5200-60	5201-60	5205-60	5206-60	60 mm
5200-62	5201-62	5205-62	5206-62	62 mm
5200-64	5201-64	5205-64	5206-64	64 mm
5200-66	5201-66	5205-66	5206-66	66 mm
5200-68	5201-68	5205-68	5206-68	68 mm
5200-70	5201-70	5205-70	5206-70	70 mm
5200-72	5201-72	5205-72	5206-72	72 mm
5200-74	5201-74	5205-74	5206-74	74 mm
5200-76	5201-76	5205-76	5206-76	76 mm
5200-78	5201-78	5205-78	5206-78	78 mm
5200-80	5201-80	5205-80	5206-80	80 mm

INDIVIDUAL WRENCH HANDLE SHAFTS WITH FIXED BLADES				
New Instrument		Exchange Instrument		Blade Arc Diameter
Starter	Finish	Starter	Finish	
5208-42	5209-42	5205W-42	5206W-42	42 mm
5208-44	5209-44	5205W-44	5206W-44	44 mm
5208-46	5209-46	5205W-46	5206W-46	46 mm
5208-48	5209-48	5205W-48	5206W-48	48 mm
5208-50	5209-50	5205W-50	5206W-50	50 mm
5208-52	5209-52	5205W-52	5206W-52	52 mm
5208-54	5209-54	5205W-54	5206W-54	54 mm
5208-56	5209-56	5205W-56	5206W-56	56 mm
5208-58	5209-58	5205W-58	5206W-58	58 mm
5208-60	5209-60	5205W-60	5206W-60	60 mm
5208-62	5209-62	5205W-62	5206W-62	62 mm
5208-64	5209-64	5205W-64	5206W-64	64 mm
5208-66	5209-66	5205W-66	5206W-66	66 mm
5208-68	5209-68	5205W-68	5206W-68	68 mm
5208-70	5209-70	5205W-70	5206W-70	70 mm
5208-72	5209-72	5205W-72	5206W-72	72 mm
5208-74	5209-74	5205W-74	5206W-74	74 mm
5208-76	5209-76	5205W-76	5206W-76	76 mm
5208-78	5209-78	5205W-78	5206W-78	78 mm
5208-80	5209-80	5205W-80	5206W-80	80 mm

INDIVIDUAL INTERCHANGEABLE DELRIN HEADS*			
5202-00	Complete Set with Case		
5202-39	39 mm	5202-50	50 mm
5202-40	40 mm	5202-51	51 mm
5202-41	41 mm	5202-52	52 mm
5202-42	42 mm	5202-53	53 mm
5202-43	43 mm	5202-54	54 mm
5202-44	44 mm	5202-55	55 mm
5202-45	45 mm	5202-56	56 mm
5202-46	46 mm	5202-57	57 mm
5202-47	47 mm	5202-58	58 mm
5202-48	48 mm	5202-59	59 mm
5202-49	49 mm	5202-60	60 mm

INDIVIDUAL INTERCHANGEABLE STEEL HEADS	
5202-22	22 mm
5202-26	26 mm
5202-28	28 mm
5202-32	32 mm
5202-36	36 mm
Optional Size:	
5202-38	38 mm

*US Patent #7,998,146 B2

INSTRUMENT AND HEAD CASES ONLY	
9014	Case for 22 Delrin Heads
9015	Case for 5 Starter and 5 Finish Blades, plus 5 Heads
9016	Case for 10 Steel Heads

Any component may be purchased individually

Instrument Exchange

Used Instruments can be returned for exchange at a nominal charge. Please call for details.

System Designed by James Kudrna, MD and Stephen Incavo, MD
Wrench Drive Handle Designed by Guido Grappiolo, MD
Delrin Heads Designed by Adolph Lombardi, MD

Flexible Ball Nose Reamer

Designed for safe and effective use in removing pedestal formation in the femoral and tibial canals

Recommended for use with a guide wire. Cannulated to allow guide wire use. Features a quick-connect end for use with a driver.


PRODUCT NO:
2628
Overall Length: 10" (25,4 cm)
Reamer Diameter: 7,5 mm



Designed by Stu Allen



PRODUCT NO:
8248 [Fixed Driver]
with Zimmer Hall Quick-connect

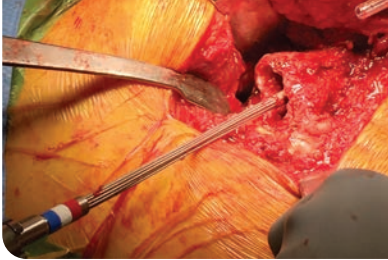

Modified Lambotte Cup Removal Osteotomes

Designed with different hemisphere of curves to match cups of different sizes

Four osteotomes with different hemispherical radii allow the osteotomes to fit next to the outer surface of different size acetabular hip cups. The handle allows for better control and provides a hammering platform.

PRODUCT NO'S:	
Overall Length: 12.75" (32,4 cm) Handle Length: 4.75" (12,1 cm)	
5240-44 Curve Radius: 44 mm	5240-52 Curve Radius: 52 mm
5240-48 Curve Radius: 48 mm	5240-56 Curve Radius: 56 mm



Modified Smith-Peterson Style Osteotomes for Acetabular Cup Removal

Multi-arch osteotomes help in removal of total hip cups

Four styles of osteotomes offer a selection for removal of total hip cups. The different curvatures help to fit next to a cups outer surface. The osteotomes have a handle for better control, plus a hammering platform end.

PRODUCT NO'S:
5280-02 [Medium] Blade Dimensions: 20 mm x 35 mm Overall Length: 11.675" (29,6 cm) Handle Length: 5" (12,7 cm)
5280-03 [Long] Blade Dimensions: 20 mm x 50 mm Overall Length: 12.25" (31,1 cm) Handle Length: 5" (12,7 cm)

Designed by Merrill Ritter, MD



Mueller-Type Cement Removal Instruments

Used for cement removal in the knee, hip, and shoulder



PRODUCT NO'S:	
S7500-00	[Complete Set with Case]
S7500-01	[Complete Set with Case and T-Handle Chuck & Key]
Individual Instruments:	
S7505	[Narrow Cement Removal Gouge, Short] 1
S7507	[Narrow Cement Removal Gouge, Long] 2
S7510	[Narrow Offset Cement Removal Gouge] 3
S7515	[Acetabular Chisel] 4
S7520	[Offset Chisel] 5
S7525	[Flared Angle Gouge] 6
S7530	[Wide Gouge] 7
S7535	["V" Splitter] 8
S7587	[Saddle Punch] 9
S7590	[Cement Splitting Osteotome] 10
S7595	[Cement Removal Osteotome, Short] 11
S7597	[Cement Removal Osteotome, Long] 12
S7540	[4.4 mm Drill] 13
S7545	[4.4 mm Drill Guide] 14
S7550	[6.4 mm Drill] 15
S7555	[6.4 mm Drill Guide] 16
S7560	[Straight Cement Removal Hook] 17
S7565	[Curved Cement Removal Hook] 18
S7570	[Cross Bar] 19
S7575	[7 mm T-Handle Conical Tap] 20
S7580	[9 mm T-Handle Conical Tap] 21
S7585	[Slotted Mallet] 22
9075	[Case Only]

T-Handle Chuck
for use with Drills

PRODUCT NO'S:	
8247-00	[T-Handle Chuck & Key]
8247-01	[T-Handle Chuck]
8247-02	[Chuck Key]

Set in Case



Narrow Cement Removal Gouge, Short

Narrow Cement Removal Gouge, Long

Narrow Offset Cement Removal Gouge

Acetabular Chisel

Offset Chisel

Flared Angle Chisel

Wide Gouge

"V" Splitter

Saddle Punch

Cement Splitting Osteotome

Cement Removal Osteotome, Short

Cement Removal Osteotome, Long

4.4 mm Drill & Grill Guide

6.4 mm Drill & Grill Guide

Straight Cement Removal Hook

Curved Cement Removal Hook


Cross Bar

7 mm T-Handle Conical Tap


9 mm T-Handle Conical Tap

Slotted Mallet

Drill & Grill Guide



Conical Tap & Mallet

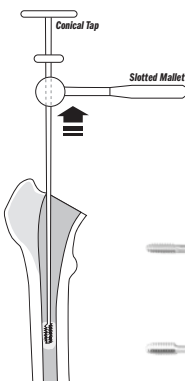

Lombardi Cement/Antibiotic Sifter

PRODUCT NO:
5215
Overall Length: 14" (35,6 cm)
Sifter Diameter: 5" (12,7 cm)

Designed by Adolph V. Lombardi Jr., MD




Desai Surgical Funnel

Helps with control and placement of bone graft or antibiotic beads

Made from surgical grade stainless steel (for sterilization).

PRODUCT NO:
8989
Overall Length: 6.25" (15,9 cm)
Handle Length: 3.25" (8,3 cm)
Funnel Diameter at Top: 3" (7,6 cm)
Funnel Flow-thru Diameter: 11 mm

Designed by Sarang Desai, DO




Surgical Spoon

Very useful for the application of methylmethacrylate bone cement

Made from surgical grade stainless steel (for sterilization purposes).

PRODUCT NO:
8209
Overall Length: 5.875" (14,9 cm)

Designed by David Scott, MD





Universal Bone Grafting/ Impacting Forceps

Bone graft can be grasped, placed & impacted without changing hands or instruments

Designed with grasping ends for delivery of bone graft. When the graft is in place, the forceps are closed, which forms the ends into an impacting punch. A striking platform forms the end of the forceps for tapping and tamping the graft. Four end diameters are available in two lengths.

PRODUCT NO'S:	
Short: 6" (15,2 cm) Length	
5010-01	1/8" (3,2 mm) Diameter End
5010-02	3/16" (4,8 mm) Diameter End
5010-03	1/4" (6,3 mm) Diameter End
5010-04	5/16" (8 mm) Diameter End
Long: 10" (25,4 cm) Length	
5050-01	1/8" (3,2 mm) Diameter End
5050-02	3/16" (4,8 mm) Diameter End
5050-03	1/4" (6,3 mm) Diameter End
5050-04	5/16" (8 mm) Diameter End

Designed by J.A. Amis, MD



Set in Storage Case

Universal Screwdriver Set

Helps eliminate the opening of multiple sterile packs when a specific size or style of screwdriver is needed

Helpful during revision total joint surgery where screws have been used, removal of bone plates, fracture fixation screws or bone graft screws. Set consists of: 7 (seven) double ended screwdriver bits – small & large single slot, cross & cruciate, 3.5 mm & 4.5 mm hex, small & large phillips, small, medium, & large star – a handle which accommodates any of the above bits, and a sterilization case.

PRODUCT NO'S:

5195 [Complete Set with Case]

Also sold individually

5195-01 [Handle]

5195-02 [Straight (single slot)]

Large: 7 x 1.5 mm, Small: 5 x 1 mm

5195-03 [Cross/Cruciate]

Large: 7 mm, Small: 6 mm

5195-04 [Hex]

Large: 4.5 mm, Small: 3.5 mm

5195-05 [Phillips]

Large: 4 mm, Small: 3.5 mm


5195-08 [Small Star: #6 & #8]

5195-06 [Medium Star: #10 & #15]

5195-07 [Large Star: #20 & #25]



Hex Bit to Torx Driver Adapter



Torx Bit to Hex Driver Adapter

New!



Set in Storage Case

Handle with two connection points

Torx/Hex Adapter Set

Designed for conversion of a 3.5 mm screwdriver

Especially helpful when an articulated, universal joint driver is needed (i.e. acetabular screws)

PRODUCT NO'S:

8003-00 [Set – One Each]

Set Includes/Available Separately:

8003-01 [Torx Bit to Hex Driver Adapter]

Overall Length: .6" (1.54 cm)

8003-02 [Hex Bit to Torx Driver Adapter]

Overall Length: .6" (1.54 cm)

Designed by Stephen M. Walsh, MD



Star Bit Driver Set

Helps eliminate the opening of multiple sterile packs when a specific size or style of star bit is needed

Helpful during revision total joint surgery. Set consists of four star bits – T10, T15, T20, & T25, a handle which accommodates any of the above bits, and a sterilization case. The drive end (A/O) is designed for easy and quick engagement with the universal instrument handle. The ergonomic, modular handle has two connection points, allowing for both straight and T-handle orientations.

PRODUCT NO'S:

5194-00 [4 Star Bits w/Handle & Case]

5194-01 [4 Star Bits w/Case only]

Also sold individually:

S0113 [Universal 4" (10.2 cm) Handle]

5194-10 [T10 with A/O End]

5194-15 [T15 with A/O End]

5194-20 [T20 with A/O End]

5194-25 [T25 with A/O End]

9003 [Case]



Universal Screw Removal Instrument System

Designed to remove solid and cannulated screws

The drive end (A/O) is designed for easy and quick engagement with the universal instrument handle.



PRODUCT NO'S:

S0010-00 [Complete System with Case]

Individual/Replacement Parts

S0113 [Universal 4" (10,2 cm) Handle]

S0128 [1.5 mm Screw Extractor]

S0116 [2.5 mm Screw Extractor]

S0130 [3.5 mm Screw Extractor]

S0117 [1.5 mm Hex Driver]

S0114 [2.5 mm Hex Driver]

S0115 [3.5 mm Hex Driver]

S0132 [4.0 mm Hex Driver]

S0133 [5.0 mm Hex Driver]

S0136 [2.5 mm Cannulated Hex Driver]

S0137 [3.5 mm Cannulated Hex Driver]

S0138 [4.0 mm Cannulated Hex Driver]

S0139 [5.0 mm Cannulated Hex Driver]

S0118 [Large Cruciform Screwdriver]

S0119 [Small Cruciform Screwdriver]

S0141 [Mini Cruciform Screwdriver]

S0120 [Single Slot Screwdriver]

S0121 [2.2 mm Trephine]

S0122 [3.2 mm Trephine]

S0123 [4.2 mm Trephine]

S0124 [4.7 mm Trephine]

S0125 [7.2 mm Trephine]

S0127 [Universal Extractor – Shaft Only]

S0127-01 [Large Extraction Bolt Body]

S0127-03 [Small Extraction Bolt Body]

S0127-04 [Extractor Wrench]


S0129 [Pick]

S0140 [Cannulated Drive Extension]

9017 [Screw Removal Case Only]

Case Dimensions: 21" x 9.5" x 2.25"

(53,4 x 24,1 x 5,7 cm)

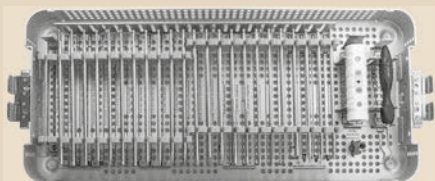

Used for removal of stripped hex screws, buried screws, partial screws with broken screw heads



Screw Extractors

Unique thread design accommodates removal of stripped screws. The instrument "locks" into the screw head and allows removal once engaged. Designed to be used in a counter-clockwise direction.

Trephines

Designed to fit over submerged screws for extraction with minimal bone loss. Extraction is enhanced by the unique tooth design. Designed to be used in a counter-clockwise direction.



Hex Drivers

Solid shaft in all standard hex sizes.

Hex Drivers

Four sizes with a cannulated shaft for easier removal of buried screws.



Universal Extractor

Designed to remove screws with heads partially or completely missing. The cone shaped head fully engages the remaining screw and optimizes the force needed for removal. The bolt is disposable and locks into place using a unique thread design. Designed to be used in a counter-clockwise direction.

Screwdrivers

Standard cruciform screwdrivers in large, small, and mini, and single slot.

Cannulated Drive Extension

Used when a longer instrument shaft is desired.




Extractor Wrench

Pick
Used to remove fragments and bone or tissue from screw head.

Universal Instrument Handle

The single handle allows the surgeon to decide which direction is most efficient and comfortable. The quick-connect release mechanism allows for quick interoperative exchange.

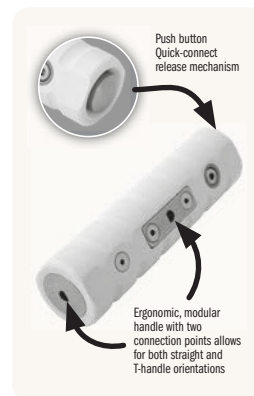

Screw/Pin Removal Locking Pliers


Unique jaw designed to solidly grip and clamp onto a screw head, broken screw, or pin for removal

PRODUCT NO:

S0142

Overall Length: 8" (20,3 cm)
Jaw Width: 4.5 mm



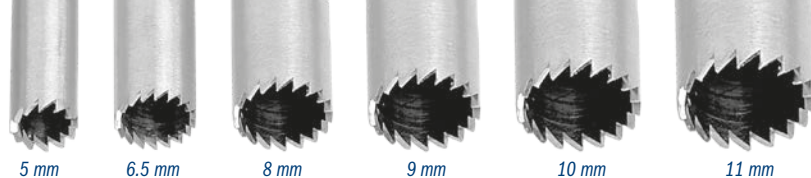

Trephine Sizes



For Screw Removal

The trephine ends are designed to fit over embedded screws for extraction with minimal bone loss. Six sizes available – internal diameters of 5 mm, 6.5 mm, 8 mm, 9 mm, 10 mm, and 11 mm. The T-handle allows for precise, controlled use.

For Core Bone Sampling

Cannulated T-handle and trephines allow use of a standard 1.6 mm (.062") threaded K-wire to help facilitate grasping and removal of a core bone sample for biopsy or core decompression. Variety of core diameters yields bone samples of sufficient size for pathology. K-wire not included.

Cheng Screw Removal and Bone Trephine Set



Six trephine sizes with reverse thread teeth designed to help with removal of screws with minimal bone loss, as well as gathering of core bone samples for biopsy or core decompression

Can be used with the T-handle or with power.

PRODUCT NO'S:	
1426-00	[Complete Set with Case]
Set Includes/Available Separately:	
1426-01	[5 mm Internal Diameter] Overall Length: 7.125" (18.1 cm)
1426-02	[6.5 mm Internal Diameter] Overall Length: 7.125" (18.1 cm)
1426-03	[8 mm Internal Diameter] Overall Length: 7.125" (18.1 cm)
1426-05	[9 mm Internal Diameter] Overall Length: 7.125" (18.1 cm)
1426-06	[10 mm Internal Diameter] Overall Length: 7.125" (18.1 cm)
1426-07	[11 mm Internal Diameter] Overall Length: 7.125" (18.1 cm)
1426-04	[Cannulated T-handle Assembly] Dimensions: 4" x 2" (10.2 cm x 5.1 cm)
1025	[Sterilization Case]
Replacement Part:	
1425-14-B-COMP	[Handle Retaining Screw]




Designed by Edward Cheng, MD

K-wire not included.

Lawton Broken Screw Extractor

Designed to help remove broken or stripped screws (1 mm-2 mm)



PRODUCT NO:	
7653-04	
Overall Length: 4" (10.2 cm)	
Handle Width: 3" (7.6 cm)	

Designed by Jeffrey Lawton, MD



Lawton Screw Extractors

Designed to help extract mini and micro fragment screws; small cannulated screws; or headless screws

PRODUCT NO'S:	
7653-00	[Set of Three with Case]
Individual Parts:	
7653-01	[1.5 mm Screw Extractor] Overall Length: 6" (15.2 cm) Handle Width: 4" (10.2 cm)
7653-02	[2.5 mm Screw Extractor] Overall Length: 6" (15.2 cm) Handle Width: 4" (10.2 cm)
7653-03	[3.5 mm Screw Extractor] Overall Length: 6" (15.2 cm) Handle Width: 4" (10.2 cm)
1025	[Sterilization Case]

Designed by Jeffrey Lawton, MD



OrthoVise™

U.S. Patent #D398,208

Made of stainless steel and designed with the option of using a slap hammer for greater adaptability.

On models equipped with attachment bolts, a slap hammer can be attached to the end of the OrthoVise™, as well as to either side of the large OrthoVise™ (except the bent jaw model).

A different size slap hammer is used for the large and small sizes of OrthoVise™, and all slap hammers are designed with a hammer plate if the additional use of a mallet is desired.



PRODUCT NO'S:

Standard

3980	[Large] Overall Length: 10" (25,4 cm) with Attachment Bolts with Large OrthoVise™ Slap Hammer (#3950)
3980-01	[Large] Overall Length: 10" (25,4 cm) with Attachment Bolts without Slap Hammer
3981	[Large] Overall Length: 10" (25,4 cm) without Attachment Bolts without Slap Hammer
3985	[Small] Overall Length: 8" (20,3 cm) without Attachment Bolt without Slap Hammer
3985-01	[Small] Overall Length: 8" (20,3 cm) with Attachment Bolt with Small OrthoVise™ Slap Hammer (#3955)
3985-T	[Small] Overall Length: 8" (20,3 cm) with Attachment Bolt without Slap Hammer

Long Nose


3965	[Large] Overall Length: 12" (30,5 cm) with Attachment Bolts with Large OrthoVise™ Slap Hammer (#3950)
3965-01	[Large] Overall Length: 12" (30,5 cm) with Attachment Bolts without Slap Hammer
3966	[Large Bent Jaw] with Attachment Bolt with Standard Slap Hammer (#3925)
3966-01	[Large Bent Jaw] without Attachment Bolt without Slap Hammer
3975	[Small] Overall Length: 9.5" (24,1 cm) without Attachment Bolt without Slap Hammer
3975-01	[Small] Overall Length: 9.5" (24,1 cm) with Attachment Bolt with Small OrthoVise™ Slap Hammer (#3955)
3975-T	[Small] Overall Length: 9.5" (24,1 cm) with Attachment Bolt without Slap Hammer

Threaded Adapters


3980-02	[Small Adapter] Changes Male End of a Slap Hammer to Female
3980-03	[Threaded Adapting Screw – Large] For use with 3965's, 3966's, 3980's, 3981
3985-03	[Threaded Adapting Screw – Small] For use with: 3975's, 3985's

Slap Hammers


3950	[Slap Hammer for Large OrthoVise] For use with 3965's, 3980's, 3981
3955	[Slap Hammer for Small OrthoVise] For use with: 3975's, 3985's
3925	[Standard Slap Hammer] For use with: 3966's

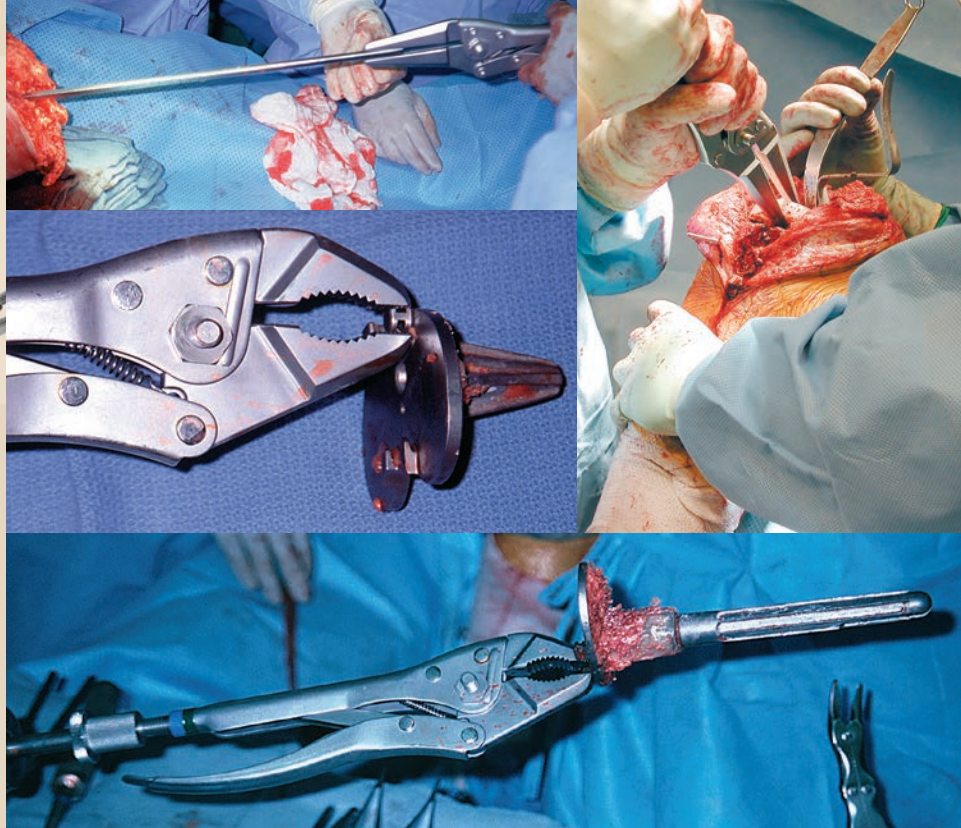

Standard

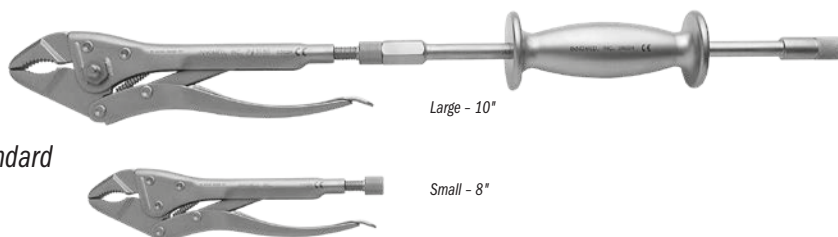

Long Nose

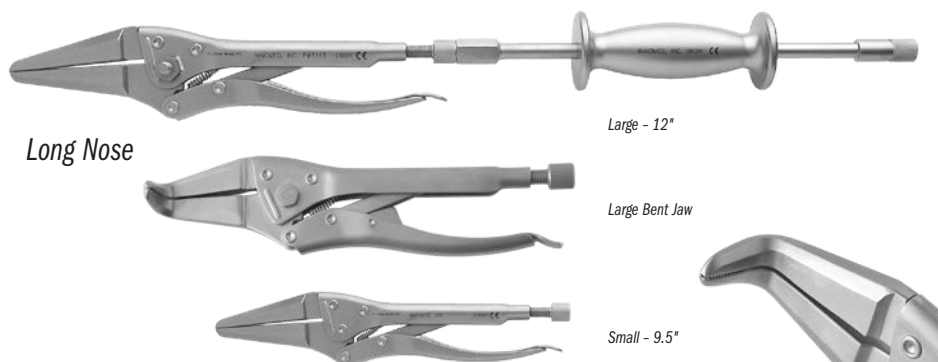

MADE EXCLUSIVELY FOR INNOMED IN GERMANY

Easy Grip Slap Hammer

Designed to help cushion the surgeon's hand



PRODUCT NO'S:

3926 [Slap hammer with 16" Rod]

Also available individually:


3925-HS [Slap hammer only]

3925-A [16" Rod only]

CANNOT be used with the 3950 & 3955 Slap Hammers



INNOMED

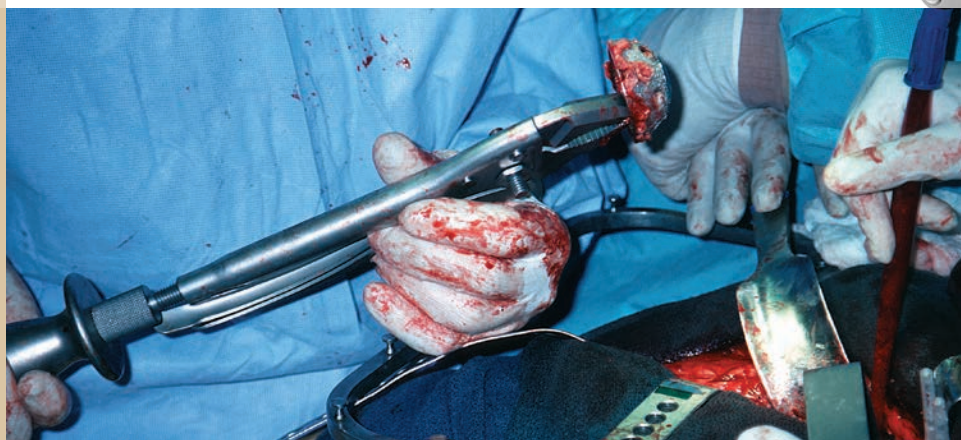



Extra Long Grasper

Designed for reaching deep into the medullary canal

PRODUCT NO:
1782
Overall Length: 15" (38,1 cm)



Long Jaw Needle Nose Pliers

PRODUCT NO:
1833
Overall Length: 7" (17,8 cm)
Jaw Length: 2.25" (5,7 cm)
Jaw Width Tapered from: 8 mm to 1.5 mm
Jaw Height Tapered from: 12 mm to 2.5 mm

MADE FOR INNOMED IN GERMANY



Screw Removal Pliers

Jaw designed to grasp onto a screw or screw head to help in removal

PRODUCT NO:
2020
Overall Length: 8 (20,3 cm)



Lawrence Revision Knee Gap Balancing Tensioner Set

Designed to help tense the medial and lateral ligaments during total knee surgery, and can help prevent impingement of a 4-in-1 block

PRODUCT NO'S:
1896-01 [Set – Left & Right]
Also available individually:
1896-01L [Left]
Overall Length: 9.25" (23,5 cm)
Pad Diameter: 1" (2,5 cm)
1896-01R [Right]
Overall Length: 9.25" (23,5 cm)
Pad Diameter: 1" (2,5 cm)

Designed by
Jeffrey M. Lawrence, MD



Flexible Osteotome System

Provides an assortment of osteotome blades for various orthopedic surgery procedures

- ▶ Sharp, flexible blades are well suited for loosening implants from cement or bony ingrowth fixation
- ▶ Various blade widths and profiles allow great flexibility to follow the implant contours
- ▶ Modular handle is made of high impact surgical stainless steel and has a quick-coupling positive locking mechanism for ease of use and quick blade changes
- ▶ Slap hammer threads into the handle and is designed to facilitate blade removal
- ▶ Optional Strike Plate can be attached to the Handle for direct striking with a mallet
- ▶ Optional Curved Chisel Blades are designed to help loosen the cement/prosthesis interval in TKA tibial tray and femoral component revisions. The curved design is useful in working around pegs & fins to get posterior cement access. Also helpful in revision of a total ankle prosthesis.

PRODUCT NO'S:

S0011-00 [Set w/Quick-Coupling Handle and Case]

S0012-00 [Set with Locking Nut Handle and Case]

Individual Instruments Included in Sets:

S1002 [Thin Osteotome Blade] 2.5" (6,3 cm) x 8 mm

S1003 [Thin Osteotome Blade] 2.5" (6,3 cm) x 10 mm

S1004 [Thin Osteotome Blade] 2.5" (6,3 cm) x 12 mm

S1005 [Thin Osteotome Blade] 2.5" (6,3 cm) x 20 mm

S1006 [Curved Thin Osteotome Blade]
2.5" (6,3 cm) x 12 mm

S1007 [Curved Thin Osteotome Blade]
5" (12,7 cm) x 20 mm

S1008 [Thin Osteotome Blade] 5" (12,7 cm) x 10 mm

S1009 [Thin Osteotome Blade] 5" (12,7 cm) x 8 mm

S1020 [Handle with Quick-Coupling End] 5" (12,7 cm)
or

S1021 [Handle with Locking Nut] 5" (12,7 cm)

S1133 [Radial Osteotome] 5" (12,7 cm) x 10 mm

S1120 [Radial Osteotome] 5" (12,7 cm) x 12 mm

S1134 [Radial Osteotome] 5" (12,7 cm) x 14 mm

S1121 [Radial Osteotome] 5" (12,7 cm) x 16 mm

S1122 [Radial Osteotome] 5" (12,7 cm) x 20 mm

S2007 [Slap Hammer] 12" (30,5 cm)

9018 [Case]

Optional Parts and Blades



PRODUCT NO'S:

S1020-SP [Strike Plate for Handle]
Diameter 1.625" (4,1 cm)

Optional Blades (Not Included in Complete Set)

S1123 [Extra Long Osteotome Blade]
7.5" (19,1 cm) x 8 mm

S1135 [Radial Osteo. Medial Curve]
6.75" (17,1 cm) x 11 mm

S1136 [Radial Osteo. Lateral Curve]
6.75" (17,1 cm) x 11 mm

S1137 [Radial Osteo. Medial Curve]
5" (12,7 cm) x 11 mm

S1138 [Radial Osteo. Lateral Curve]
5" (12,7 cm) x 11 mm

S1222 [Chisel Blade] 2.5" (6,4 cm) x 8 mm

S1223 [Chisel Blade] 2.5" (6,4 cm) x 10 mm

S1224 [Chisel Blade] 2.5" (6,4 cm) x 12 mm

S1225 [Chisel Blade] 2.5" (6,4 cm) x 20 mm

S1228 [Chisel Blade] 5" (12,7 cm) x 10 mm

S1229 [Chisel Blade] 5" (12,7 cm) x 8 mm

S1230 [Chisel Blade] 5" (12,7 cm) x 20 mm

S1231 [Chisel Blade] 5" (12,7 cm) x 12 mm

S1232 [Extra Long Chisel Blade]
7.5" (19,1 cm) x 8 mm

S1233-L [Flexible Left Curved Chisel]
2" (5,1 cm) x 8 mm

S1233-R [Flexible Right Curved Chisel]
2" (5,1 cm) x 8 mm

Medial and Lateral Curve Radial Blades designed by Henry Boucher, MD
Curved Chisel Blades designed by William McMaster, MD



Handle with Quick-Coupling End

System Includes
Choice of
Handle Style

Handle with Locking Nut



Slap Hammer



3" Thin Blades

Curved Thin Blades

5" Thin Blades

Radial Blades



Strike Plate for Handle



Extra Long 9" Osteotome Blade




Medial Curve Radial Blades



Lateral Curve Radial Blades




Curved Radial Blades are helpful
in the removal of total hip stems



Extra Long 9" Chisel Blade




1.5" Curved Chisel Blades

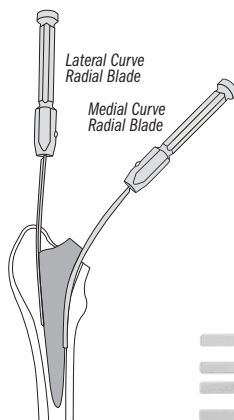


Lateral Curve
Radial Blade


Medial Curve
Radial Blade



Curved chisel design
allows working around
component pegs, fins, etc.



Bevel side away
from component

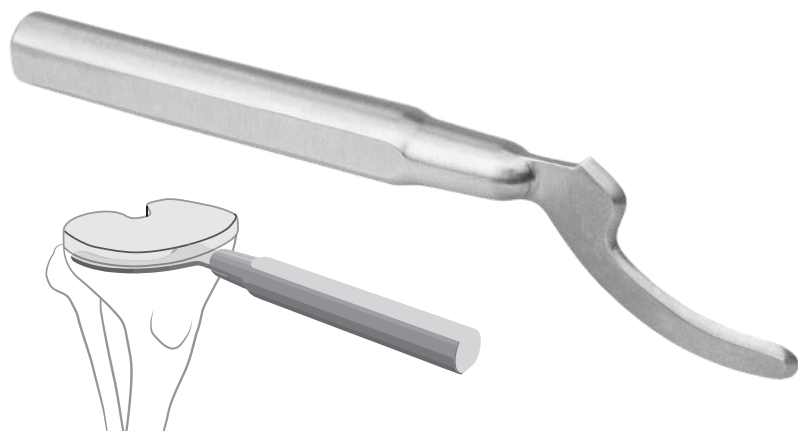

Whang Tibial Osteotome

Designed to disrupt the interface of a well fixed tibial base, specifically the lateral portion

PRODUCT NO:

5338

Overall Length: 8" (20,3 cm)

Handle Length: 4.5" (11,4 cm)


Blade Thickness: 2,5 mm

Designed by William Whang, MD



Complete Set

Two blades included in Set

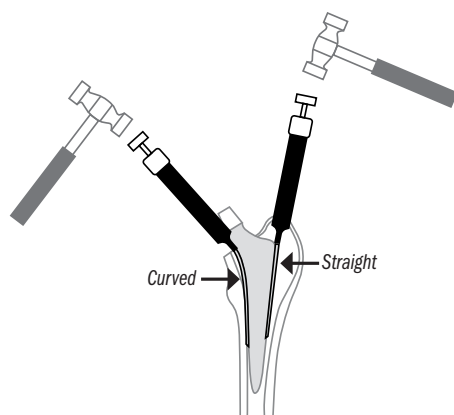

Complete Set

Two blades included in Set

PRODUCT NO'S:

5302-00 [Complete Set]

Included In Set / Replacement Parts:

5302-01 [Guide Only]

Overall Length: 5" to 8.75" (12,7 cm to 22,2 cm)

5302-02 [10 mm Curved Chisel Blade Only]

Overall Length: 4.25" (10,8 cm)

Blade Thickness: .020" (.51 mm)

3040 [Slap Hammer]

1015 [Sterilization Case]

Chisel blade features an ultra hard titanium nitride coating to help extend life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion.



Designed by E. J. Whelan, III, MD

Whelan Flexible Chisel Guide

Designed to help stabilize a chisel blade until it's within the bone prosthesis interface

Guide with sliding handle helps to stabilize a thin flexible chisel blade until it's within the bone prosthesis interface. Chisel tip lets it hug the prosthesis to help prevent perforation. Slap hammer threads into the handle and is designed to facilitate blade removal. Easily changeable disposable blades help assure sharpness.

PRODUCT NO'S:

5301-00 [Complete Set]

Individual Instruments:

5301-01 [Guide Only]

Overall Length: 5.5" to 8.5" (14 cm to 21,6 cm) w/o blade

5301-02 [Chisel Blade] Single 10 mm Blade

Overall Length: 4.625" (11,7 cm)

Blade Thickness: .020" (.51 mm)

3040 [Slap Hammer]

1015 [Sterilization Case]

Chisel blade features an ultra hard titanium nitride coating to help extend life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion.



Designed by E. J. Whelan, III, MD

Tibial Component Extractor

Universal extraction instrument clamps onto a tibial knee component for extraction

The Tibial Component Extractor is designed to lock onto a tibial component and extract in line with the stem or pegs. Two adjustable osteotomes are inserted on the underside of the component. A locking screw clamps on to the top of the extractor to secure the component. Includes standard slap hammer.

PRODUCT NO'S:

3630 [Extractor with Standard Slap Hammer]

Optional/Individual/Replacement Parts:


3630-01 [Pair of Standard Blades]
10 mm x 50 mm

3630-02 [Pair of Offset Blades]
10 mm x 50 mm, Offset 15 mm

3630-HS [Hex Screws] Pkg of 6

3925 [Standard Slap Hammer]
Thread Gauge: 3/8"-16

3935 [Extra Large Slap Hammer]
Thread Gauge: 3/8"-16

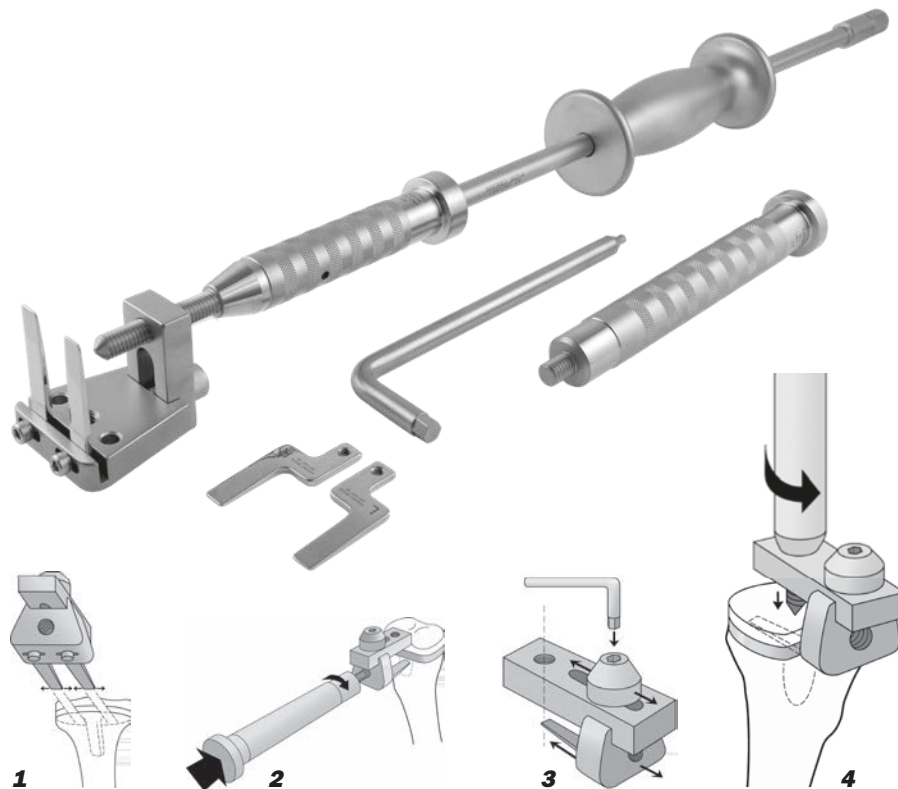

1 Adjust Blades To Fit Component

The straight or angled blades are adjusted by loosening the attached screws and sliding the blades into the desired position.

2 Drive Blades Under Component

The blades are driven under the tibial base.

3 Tighten Threaded Rod Onto Component

The site hole for the pointed, threaded rod can be aligned with the proximal surface of the tibial component by using the included hex wrench system. The pointed, threaded rod is tightened onto either a polyethylene or metal tibial component.

4 Attach Slap Hammer Assembly & Remove Component

The slap hammer assembly is threaded into the threaded rod handle for removal of the component.

Easy Grip Slap Hammer

Designed to help cushion the surgeon's hand

PRODUCT NO'S:

3926 [Slap hammer with 16" Rod]

Also available individually:

3925-HS [Slap hammer only]

3925-A [16" Rod only]



Incavo Tibial Component Revision Osteotomes

Designed to help break the posterior cement-bone interface when removing a cemented tibial TKA component

Also used to help break the posterior implant-bone interface when removing a cementless tibial TKA component.

PRODUCT NO'S:

3621-00 [Complete Set]

Set Includes:

3621-01 [Standard Osteotome]

Blade Length: 10 mm
Blade Width: 1/2" (12,7 mm)
Blade Offset: 3/4" (19,1 mm)
Overall Length: 8.5" (21,6 cm)

3621-02 [Medium Osteotome]

Blade Length: 14 mm
Blade Width: 1/2" (12,7 mm)
Blade Offset: 3/4" (19,1 mm)
Overall Length: 8.5" (21,6 cm)


3621-03 [Deep Osteotome]



Blade Length: 18 mm
Blade Width: 1/2" (12,7 mm)
Blade Offset: 3/4" (19,1 mm)
Overall Length: 8.5" (21,6 cm)

3040 [Slap Hammer]

1015 [Sterilization Case]

Designed by
Stephen J. Incavo, MD

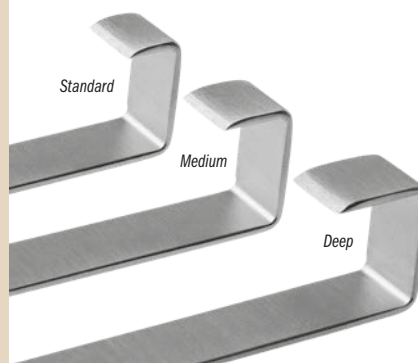

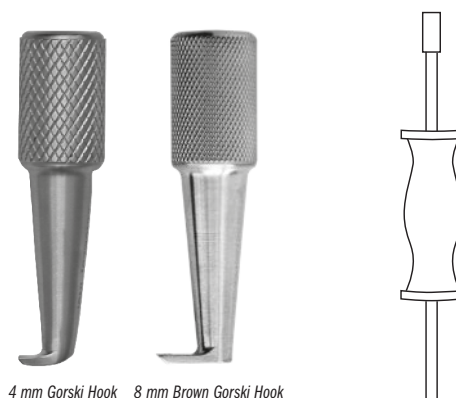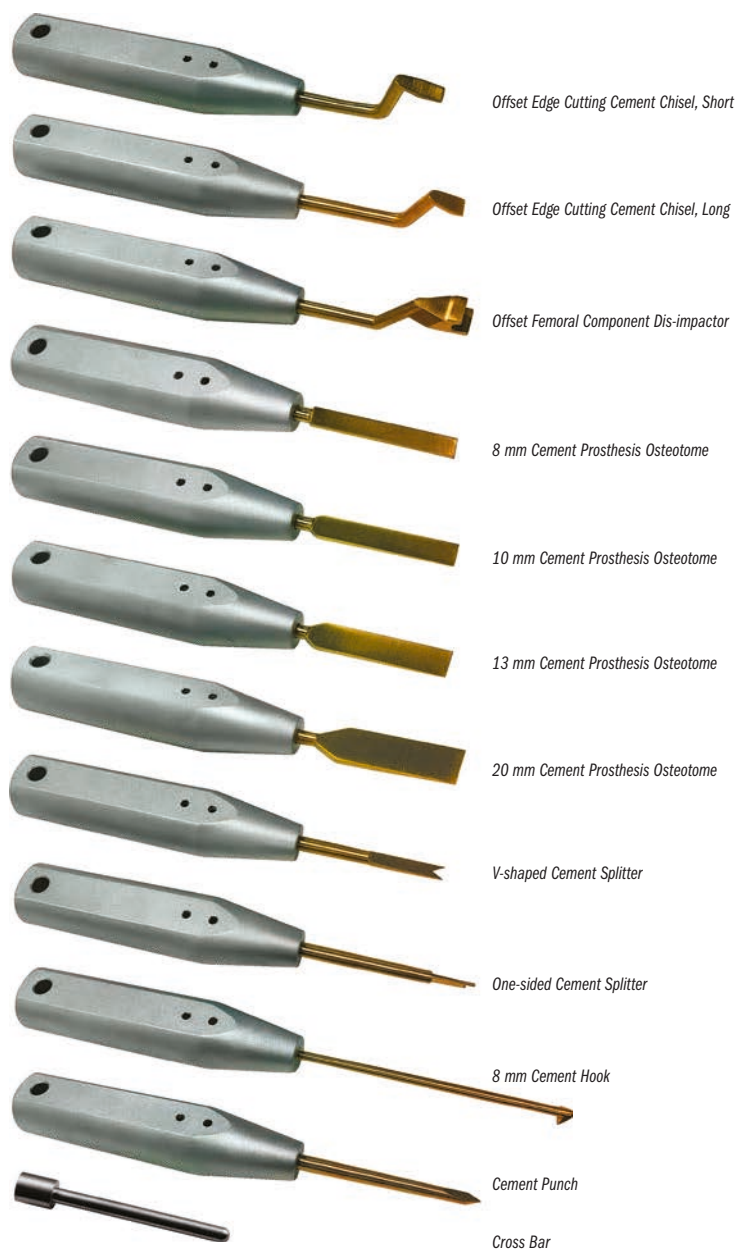

Lachiewicz Total Knee Revision Set

Used for total knee revision

PRODUCT NO'S:

3700-00 [Complete Set]

Individual Instruments:

3700-01 [10 mm Offset Edge Cutting Cement Chisel, Short]
Overall Length: 8" (20,3 cm)

3700-02 [15 mm Offset Edge Cutting Cement Chisel, Long]
Overall Length: 8.125" (21 cm)

3700-03 [Offset Femoral Comp. Disimpactor]
Overall Length: 8.75" (22,2 cm)

3700-04 [8 mm Cement Osteotome]
Overall Length: 8" (20,3 cm)

3700-05 [10 mm Cement Osteotome]
Overall Length: 8" (20,3 cm)

3700-06 [13 mm Cement Osteotome]
Overall Length: 8" (20,3 cm)

3700-07 [20 mm Cement Osteotome]
Overall Length: 8" (20,3 cm)

3700-08 [V-shaped Cement Splitter]
Overall Length: 7.5" (19,1 cm)

3700-09 [One-sided Cement Splitter]
Overall Length: 8.5" (21,6 cm)

3700-10 [8 mm Cement Hook]
Overall Length: 11" (27,9 cm)

3700-11 [Cement Punch]
Overall Length: 8.75" (22,2 cm)

3700-12 [Removal Cross Bar]
Overall Length: 4.375" (11,1 cm)

3700-CASE [Case for Set]
Dimensions: 16.25" x 13" x 1.75" (41,3 x 33 x 4,4 cm)

Designed by Paul F. Lachiewicz, MD



Tibia Tray Removal Hooks

Designed to be used with a slap hammer to remove a tibia tray during revision knee surgery

PRODUCT NO'S:

3650 [4 mm Gorski Hook with Standard Slap Hammer #3925]

3650-01 [4 mm Gorski Hook Only]

3655 [8 mm Brown Gorski Hook with Standard Slap Hammer #3925]


3655-01 [8 mm Brown Gorski Hook Only]

Optional Items:

3935 [Extra Large Slap Hammer]
Thread Gauge: 3/8"-16

Designed by Jerrold Gorski, MD

Modified 8 mm version designed by Dennis Brown, MD



Foster Cement Osteotome

Designed to help remove a UKA/TKA component

Features a large handle and striking platform.

PRODUCT NO:

5232

Osteotome Width: 6.7 mm

Overall Length: 8.5" (21.6 cm)

Handle Length: 5.75" (14.6 cm)

Designed by Scott A. Foster, MD



Eickmann Knee Revision Set

Used for total knee revision


PRODUCT NO'S:

5470-00 [Complete Set]

Individual Instruments:

5470-08 [8 mm Chisel]

Osteotome Width: 8 mm

Blade Length: 2.375" (6 cm)

Overall Length: 7.375" (18.7 cm)

5470-11 [11 mm Chisel]

Osteotome Width: 11 mm

Blade Length: 2.375" (6 cm)

Overall Length: 7.375" (18.7 cm)

5470-20 [20 mm Chisel]

Osteotome Width: 20 mm

Blade Length: 2.375" (6 cm)

Overall Length: 7.375" (18.7 cm)

5472-08 [8 mm Offset Cement Removal Chisel]

Osteotome Dimensions: 8 mm W x 12 mm L

Blade Length: 2.375" (6 cm)

Overall Length: 7.375" (18.7 cm)

5474-06 [6 mm Notched Cement Removal Chisel]

Osteotome Width: 6 mm

Blade Length: 2.625" (6 cm)

Overall Length: 7.375" (18.7 cm)

5475-08 [8 mm Implant Remover]

Diameter: 8 mm

Blade Length: 2.625" (6 cm)

Overall Length: 7.375" (18.7 cm)

5470-CASE [Case Only]



Designed by Thomas Eickmann, MD

Bozeman Cement Trimmer

Combines the two most common cement trimming tools into one

The blunt blade tip end helps with separation of the trimmed cement. The angled curette end helps gather the trimmings. The thin shank and angled curette can reach into tight spaces such as the back of the implants to remove excess cement. The titanium nitride coated ends help eliminate metal transfer.

PRODUCT NO:

5245

Overall Length: 8.5" (21.6 cm)

Designed by Daniel M. Gannon, MD



Curved Cement Osteotome

For use in the femoral notch during removal of a knee femoral component

Can be used to help separate the prosthesis/bone or prosthesis/cement interface. The curve of the osteotome allows it to be used in the femoral notch of a femoral component.


PRODUCT NO:

5220

Overall Length: 6.75" (17.1 cm)

Handle Length: 3" (7.6 cm)

Blade Width: 6.8 mm

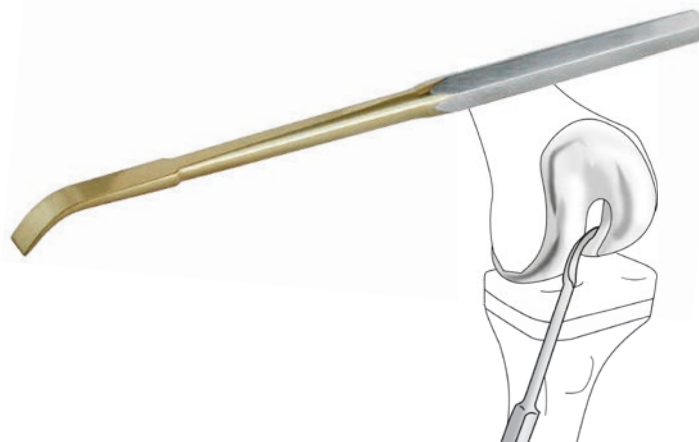

Femoral Component Extractor

Universal extraction instrument clamps onto a femoral knee component for extraction

A standard set of jaws is used for slotted and unslotted femoral components. Features a round tightening wheel which allows the surgeon to easily tighten the jaws without using a separate socket wrench. The tightening wheel can be easily removed for replacing the jaws. The copolymer prosthesis stabilizing block allows access to the block tightening wheel. Includes standard slap hammer.

PRODUCT NO'S:


3920 [Extractor w/Std. Slap Hammer #3925]

Optional/Individual/Replacement Parts:

3920-SJ [Pair of Standard Jaws]

3925 [Standard Slap Hammer]
Thread Gauge: 3/8"-16

3935 [Extra Large Slap Hammer]
Thread Gauge: 3/8"-16

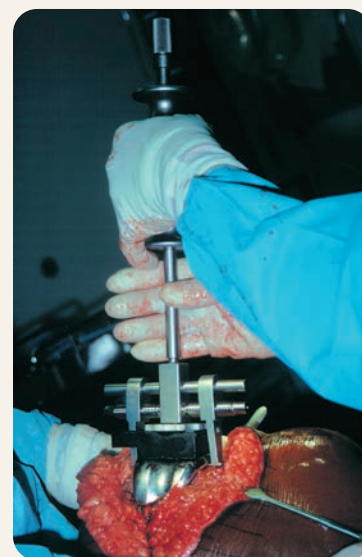

Easy Grip Slap Hammer

Designed to help cushion the surgeon's hand



PRODUCT NO'S:

3926 [Slap hammer with 16" Rod]

Also available individually:

3925-HS [Slap hammer only]

3925-A [16" Rod only]



Boynton Punch

Helpful in removing trial, femoral and revision total knee components





The flange end fits onto the flange of a femoral knee component or trial.

PRODUCT NO'S:

5120-01 [Standard]
Overall Length: 11.75" (29,8 cm)
Shaft Diameter: 9.5 mm

5120-02 [Offset]
Overall Length: 11.75" (29,8 cm)
Shaft Diameter: 9.5 mm
Punch End Offset: 6 cm

Designed by L. Boynton, MD

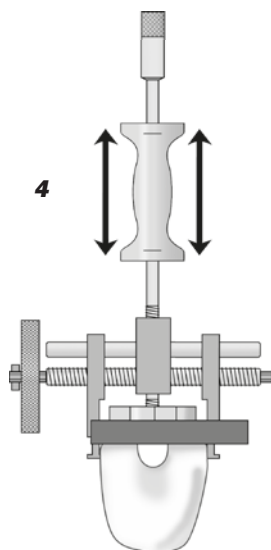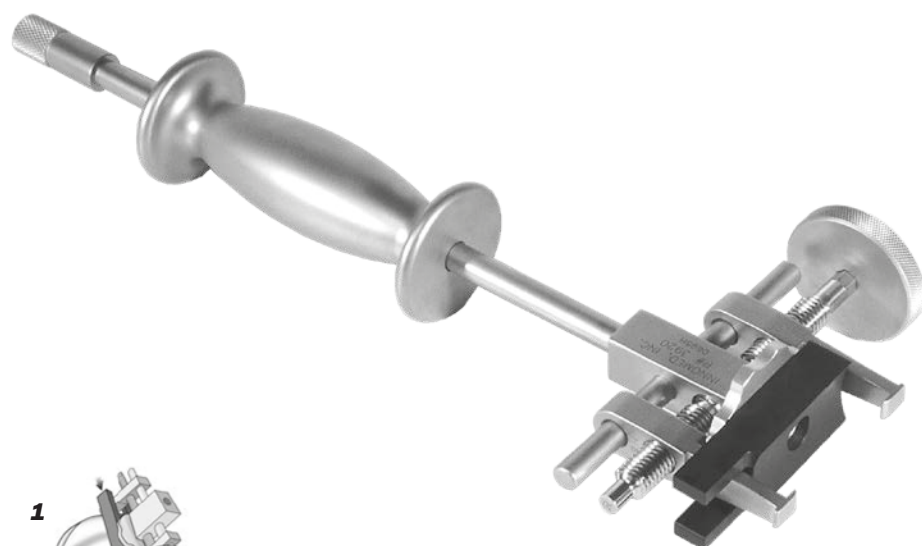

1 Attach Jaws To Component

The jaws are tightened against the femoral component with the socket wrench or tightening wheel.

2 Stabilize The Component

The delrin stabilizing insert is tightened against the femoral component by rotating the thumbwheel.

3 Attach Slap Hammer Assembly

The slap hammer assembly is threaded into the extractor body.

4 Use Slap Hammer Assembly To Remove Component

The slap hammer is also designed with a hammer flare for optional use with a mallet.



Cherf Leg Holder

Supports the lower extremity for prepping before knee or hip surgery

Useful for all lower extremity procedures and is particularly helpful for supporting the leg with the patient positioned in the lateral position. By holding the foot/ankle in an externally rotated position, the knee can be locked into extension which helps eliminate the need for manual support.

May also be used to support the limb for surgical patients in the supine position such as for knee and foot/ankle procedures.

PRODUCT NO'S:


2270

Replacement Parts:

4150-PD3 [Set of 3 Small Pads]



Designed by John Cherf, MD

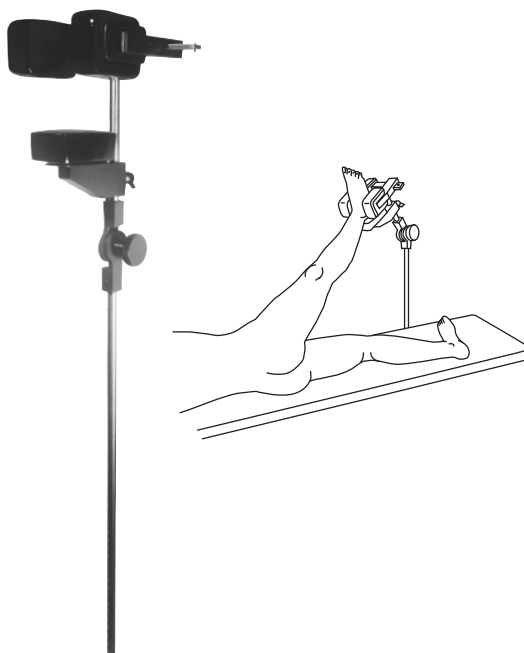

Capello Patient Positioner

Provides stable positioning of a patient during hip procedures

Optional two-piece board construction allows for easier use and storage. Includes: Board, Gel Pad, (4) 6" Radiolucent Pegs, (4) 9" Radiolucent Pegs, (2) Stabilizing Clamps, (2) Table Clamps. All gel pads, pegs and peg height extensions can be used with existing peg boards. The board is also available in a one-piece design. The pegs are radiolucent.

PRODUCT NO'S:

4090 [Set with 2-Piece Board]

4095 [Set with 1-Piece Board]

Optional & Replacement Parts:

4090-PB [2-Piece Positioning Board]

4095-PB [1-Piece Positioning Board]

4090-06 [6" (15,2 cm) Radiolucent Peg]

4090-08 [9" (22,9 cm) Radiolucent Peg]

4090-SC [Stabilizing Clamp]


4090-01 [Large Gel Pad]

4090-EXT [Peg Extension]

4090-02 [Peg Gel Pad]

9120 [Table Clamp]

Designed by William Capello, MD

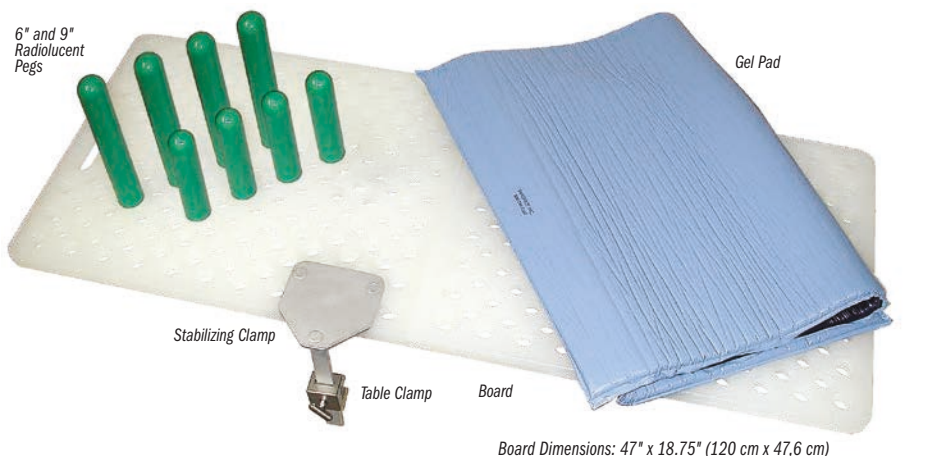

Two-piece board design with interlocking board pieces for easy handling

Also available in a one-piece design



Optional Peg Pad

Optional Peg Extension

Large Patient Peg Board Positioner Post Assembly

Especially helpful with large patients where reaching the a.s.i.s. is needed for stabilization

PRODUCT NO'S:

4150-10P [Complete Set]

Assembly Set Includes:

4090-03 [Post Assembly Adapter]


4150-10B [10" (25,4 cm) Post with 2 Pads]

4150-EXT [2" (5,1 cm) Spacer with 4" (10,2 cm) Knob]

4150-EXT4 [4" (10,2 cm) Spacer with 6" (15,2 cm) Knob]

NOTE: The peg board positioner is available separately and is not included with this assembly set.

Designed by Paul Ramsey, MD

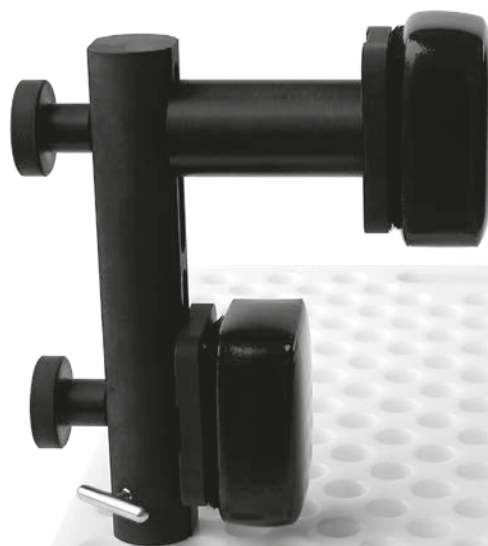

Post Assembly Adapter


Thornberry Hip Positioner

Designed to be adjustable yet sturdy, and is especially helpful when stabilizing a large patient during total hip and revision surgery

The Thornberry Hip Positioner is designed to attach directly to the operating table utilizing existing table clamps, or the Innomed #2595 Table Clamps, which are not included.

The upper arm assembly can be adjusted for height. Both arms include a push-button to allow the pad platform to swivel and lock into any of three fixed positions. The tall 18" post also includes a push-button to allow the post/arms unit to swivel and lock into any of three fixed positions.

The complete unit is autoclavable except for the foam pads. The pads are made of semi-dense foam to help prevent pressure points and are sealed with a washable coating. The coating also helps to lessen the possibility of skin breakdown.

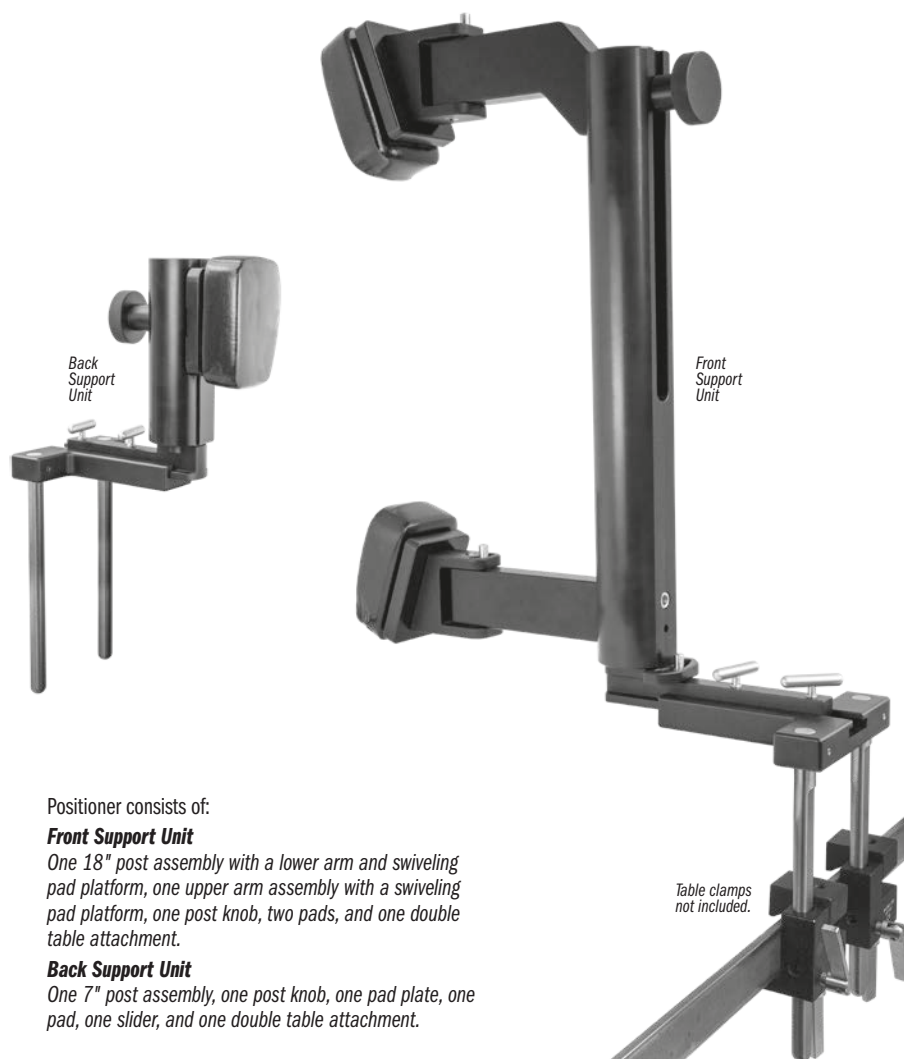

Positioner consists of:

Front Support Unit


One 18" post assembly with a lower arm and swiveling pad platform, one upper arm assembly with a swiveling pad platform, one post knob, two pads, and one double table attachment.

Back Support Unit

One 7" post assembly, one post knob, one pad plate, one pad, one slider, and one double table attachment.



It may be necessary to place the Double Table Attachment(s) 180°—sticking out from the table—to accommodate the large patient, as shown at above.

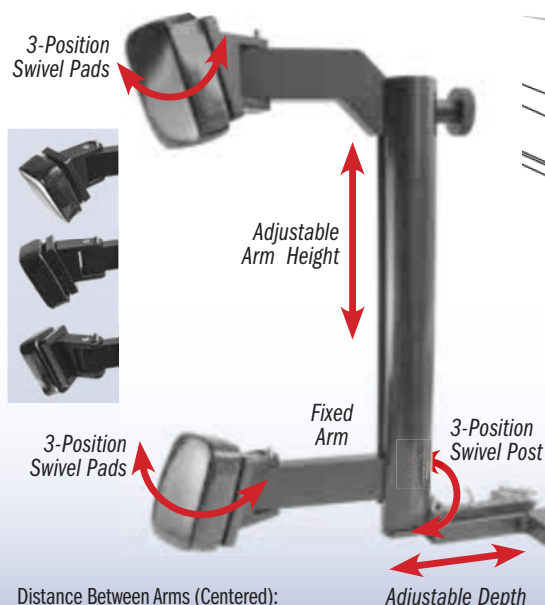

Distance Between Arms (Centered):
8.5" (21,6 cm) Minimum,
17.25"(43,8 cm) Maximum

PRODUCT NO'S:

4160-00 [Complete Set]

Items Included in Set:

4160-07 [7" (17,8 cm) Back Support Post]

4160-18 [18" (45,7 cm) Post w/Fixed Lower Arm]

4160-AA [Adjustable Upper Arm]

4160-DTA [Double Table Attachment]

Two (2) included with set; One (1) only with this number

4160-PB [Post Knob]

Two (2) included with set; One (1) only with this number

4150-P [Pad Plate for Back Support]

4150-PD3 [Set of Three (3) Pads]

4150-S [Back Support Slider]

Optional Items:

2595 [Table Clamp] One only with this number

Designed by Robert L. Thornberry, MD



Wixson Hip Positioner

Provides stable positioning of a patient during hip surgery



The Wixson Hip Positioner is used for stable positioning of a patient during total hip and revision surgery. It is designed to be placed on top of the operating table.

The base plate is rubber-backed to reduce slipping on the table. The uprights can easily be slid in and out of the multiple slots in the plate for desired positioning and locked into position with the locking bolt. The complete upright assembly is radiolucent.

The upright pads and the base plate pad are made of semi-dense foam to help prevent pressure points and are sealed with a washable coating. The coating also helps to lessen the possibility of skin breakdown.

The hip positioner consists of: One 10" post with double pads, one 6" post with a single pad, one 20" base plate, one base plate pad, two 2" spacers, one 4" knob, and one 6" knob.

The spacers and longer knobs are supplied for use with larger patients: use one spacer with the 4" knob, or combine the two spacers to use with the 6" knob.

The pad assembly can be adjusted for additional height and width. The upright posts are modular. The complete unit is radiolucent and autoclavable except for the foam pads.

PRODUCT NO'S:

4050



Optional & Replacement Parts:

4150-C	[2" (5,1 cm) Spacer]
4150-C4	[4" (10,2 cm) Spacer]
4150-EK	[4" (10,2 cm) Knob] For use with 2" Spacer
4150-EK4	[6" (15,2 cm) Long Knob] For use with two 2" Spacers or one 4" Spacer
4150-EK6	[8" (20,3 cm) Long Knob] For use with one 2" Spacer and one 4" Spacer
4150-EXT	[2" Spacer with 4" Knob]
4150-EXT4	[4" Spacer with 6" Knob]
4150-EXT6	[4" and 2" Spacer with 8" Knob]
4150-O6	[6" (15,2 cm) Post]
4150-O8	[8" (20,3 cm) Custom Post]
4150-O9	[9" (22,9 cm) Custom Post]
4150-O10	[10" (25,4 cm) Post]
4150-O12	[12" (30,5 cm) Custom Post]
4150-O14	[14" (35,6 cm) Custom Post]
4150-PD3	[Set of 3 Small Pads]
4050-LPD	[Large Pad]
4050-BP	[20" (50,8 cm) Wide Baseplate]
4050-BP24	[24" (61 cm) Custom Wide Baseplate]

Designed by R.L. Wixson, MD



Baseplate Dimensions: 20" x 11.25" (50.8 cm x 28,6 cm)

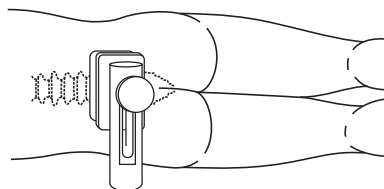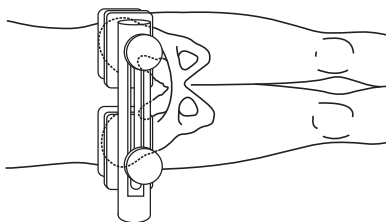

Optional Hip Positioner Parts:

14" (35,6 cm) Custom Post



12" (30,5 cm) Custom Post



9" (22,9 cm) Custom Post




8" (20,3 cm) Custom Post



4" (10,2 cm) Spacer



2" (5,1 cm) Spacer

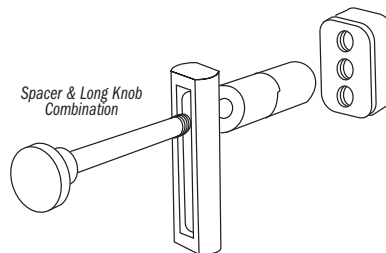

8" (20,3 cm) Knob



6" (15,2 cm) Knob



4" (10,2 cm) Knob



Multi-Adjustment Hip Positioner

Provides stable positioning of a patient during hip surgery

Multi-adjustment arms allow the positioner to be adjusted to fit all sizes of patients. Extra attachment allows for more versatility of placement. Especially helpful with large patients where reaching the a.s.i.s. is needed for stabilization.

PRODUCT NO'S:

4030

Replacement Parts:

4150-PD2 [Set of 2 Small Pads]



Stulberg Hip Positioner

Provides stable positioning of a patient during hip surgery



The Stulberg Hip Positioner is used for stable positioning of a patient during total hip and revision surgery. It is designed to attach directly to the operating table utilizing the existing table adapters.

The upright pads are made of semi-dense foam to help prevent pressure points and are sealed with a washable coating. The coating also helps to lessen the possibility of skin breakdown.

The hip positioner consists of: One 10" post assembly with double pads and one 6" post assembly with a single pad, two 2" spacers, one 4" knob, one 6" knob, and two table attachments.

The spacers and longer knobs are supplied for use with larger patients: use one spacer with the 4" knob, or combine the two spacers to use with the 6" knob.

The pad assembly can be adjusted for additional height and width. The upright posts are modular. The complete unit is radiolucent and autoclavable except for the foam pads and the storage case.

PRODUCT NO'S:

4150-00

Optional & Replacement Parts:

4150-C [2" (5,1 cm) Spacer]

4150-C4 [4" (10,2 cm) Spacer]

4150-EK [4" (10,2 cm) Knob]

For use with 2" Spacer

4150-EK4 [6" (15,2 cm) Long Knob]

For use with two 2" Spacers or one 4" Spacer

4150-EK6 [8" (20,3 cm) Long Knob]

For use with one 2" Spacer and one 4" Spacer

4150-EXT [2" Spacer with 4" Knob]

4150-EXT4 [4" Spacer with 6" Knob]

4150-EXT6 [4" and 2" Spacer with 8" Knob]

4150-06 [6" (15,2 cm) Post]

4150-08 [8" (20,3 cm) Custom Post]

4150-09 [9" (22,9 cm) Custom Post]

4150-10 [10" (25,4 cm) Post]

4150-12 [12" (30,5 cm) Custom Post]

4150-14 [14" (35,6 cm) Custom Post]

4150-PD3 [Set of 3 Small Pads]

4150-TA [Table Attachment]

9002 [Storage Case]

Designed by S. David Stulberg, MD



Wixson/Stulberg Anterior Trunk Support


Helps protect the chest and shoulders from slumping forward during total hip surgery

PRODUCT NO:


4110




Designed by R.L. Wixson, MD and S. David Stulberg, MD

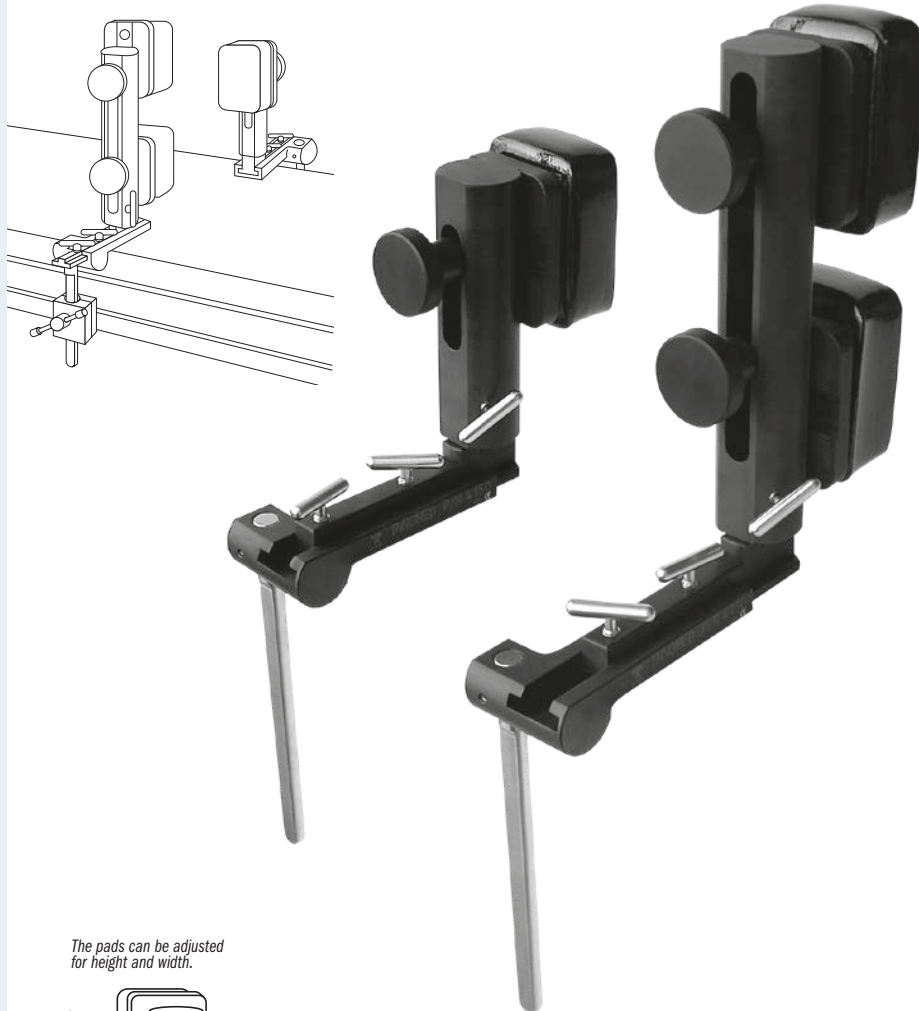



The pads can be adjusted for height and width.

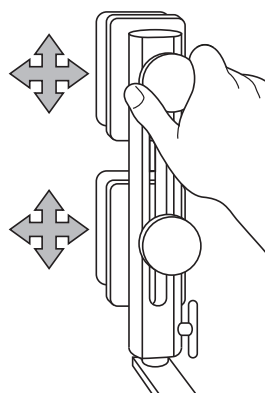

The upright assembly can be rotated and locked in place.



The upright assembly adjusts by a sliding track to accommodate various sized patients. It is locked in the sliding track by tightening one or two locking bolts.

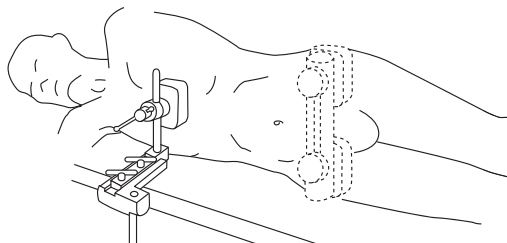

Berger Block Positioner

Designed for lower extremity positioning with dual height options

PRODUCT NO'S:

2750-00 [Berger Block Positioner Set]

Dimensions with Pads:

4.75" x 6.75" x 8" (12,1 cm x 17,1 cm x 20,3 cm)

Set Includes / Available Individually:

2750-01 [Block Positioner Only]

Dimensions: 4.125" x 6.125" x 8" (10,5 cm x 15,6 cm x 20,3 cm)

2750-P [Block Positioner Pad Only]

[Block Positioner Brown Strap Only]

(2) Included in Set

Optional Items:

2750-S [Block Positioner Brown Strap] **Pkg of 10**



Designed by Richard Berger, MD



Use in Hip Surgery

Use in Knee Surgery



Sanders Extremity Positioning Tubes

Designed to support the knee and ankle during lower extremity surgery

The 6" tube lifts the knee off the operating table and allows for approximately 30° of knee flexion. Very useful for closure of total knee incisions, supporting fractures of the distal femur, and tibia plateau fractures. The 4" tube elevates the foot and ankle for ankle fracture surgery. The tubes are made of aluminum, allowing them to be autoclaved. They help eliminate the need for rolled sheet bolsters.

PRODUCT NO'S:

2740-01 [Small]

Diameter: 4" (10,2 cm)

Width: 8" (20,3 cm)

Designed by Richard A. Sanders, MD

2740-02 [Large]

Diameter: 6" (15,2 cm)

Width: 8" (20,3 cm)



Sanders Tube Holder

Designed to help stabilize the Sanders Extremity Positioning Tubes (#2740-01 & -02)

The tube holder will help stabilize the tubes when used for lower extremity positioning for lower extremity surgery. Also, by using the tubes with the Stulberg Sliding Bolster (#2730 - see page 82), the knee can be placed in less flexion during the initial incision and wound closure.

PRODUCT NO:

2740-03

Dimensions: 8" x 4" x 1.625" (20,3 x 10,2 x 4,1 cm)



Designed by Richard Sanders, MD



Stulberg Sliding Bolster

Helps eliminate the need for a sand bag during total knee surgery

The base plate is attached to the table and the sterile sliding bolster is placed on top of the sterile drape. The bolster can be adjusted for different angles of knee flexion during surgery.


PRODUCT NO:

2730

Base Dimensions:

20" x 10.5" (50,8 cm x 26,7 cm)

Designed by S. David Stulberg, MD

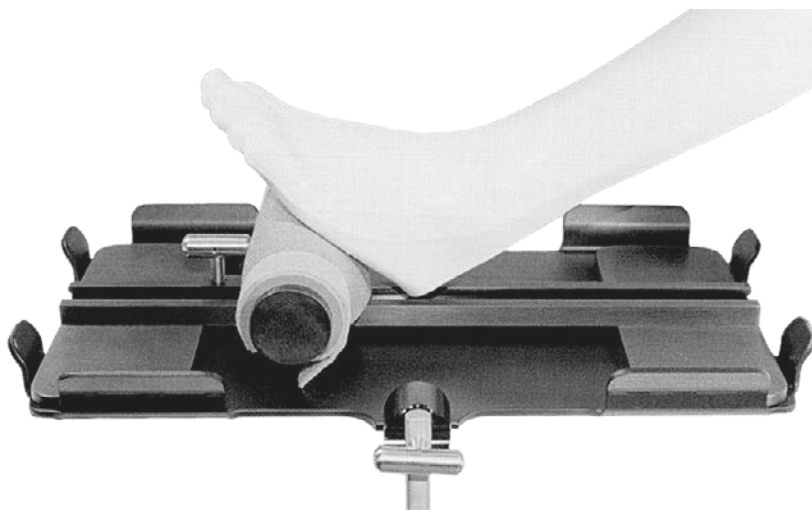



Adjustable Knee & Tibial Positioner

Adjustable design allows for use in procedures around the knee such as tibial nailing, tibial condyle plating, patella fracture fixation, supracondylar fracture plating, supracondylar fracture nailing, and total knee replacement

Radiolucent. Steam sterilizable.

PRODUCT NO'S:

2770-00 [Set]

Includes Positioner, Pad, and Two Short Straps

Individual / Replacement Parts

2770-01 [Positioner]

Overall Length (Folded): 28" (71,1 cm)

Overall Length (Flat): 54.75" (139 cm)

Maximum Triangle Height: 14" (35,6 cm)

Width: 5.5" (14 cm)

Thickness (Folded): 1.8" (4,6 cm)

Thickness (Flat): .75" (1,9 cm)

2770-P [Silicone Pad]

Dimensions: 12" x 5.5" (30,5 cm X 14 cm)

2590-S [Short Straps] *Pkg of 10*

Designed by Ashutosh Chaudhari, MD



Fromm Femur & Tibia Triangles

Used for femur and tibia positioning during nailing, repairs and fractures

Designed to position and hold the femur and tibia during intramedullary nailing of the tibia, ligament repairs and extremity fractures. Allows knee to be flexed greater than 90° to allow reaming and nail insertion without displacing fracture. The triangles are available in four heights: 8.5", 11", 14", and 16". The three smaller triangles are designed to fit inside the larger triangle for storage. They are supplied with an autoclavable silicone cushioning pad and velcro* straps. The triangles are radiolucent and gas or steam sterilizable.

PRODUCT NO'S:

2760-00 [Set of 3] *Angles: Top 30°, Two Bottom 75°*

2760-01 [11"] *Base: 6" (15,2 cm), Height: 11" (27,9 cm)*

2760-02 [14"] *Base: 7" (17,8 cm), Height: 14" (35,6 cm)*

2760-03 [16"] *Base: 9" (22,9 cm), Height: 16" (40,7 cm)*

Sold Separately – Not In Set:

2760-XS [8.5"] *Base 5" (12,7 cm), Height: 8.5" (21,6 cm)*

Replacement Parts:

2760-P [Silicone Pad]

2760-S [Straps] *Package of 18*

8120-SP [Straps for XS] *Package of 10*


Designed by S.E. Fromm, MD.

Extra Small Triangle designed by S.E. Fromm, MD & Kenneth Merriman, MD.


*Velcro® is a registered trademark of the Velcro Companies.



Tibial Nailing




Retrograde Femoral Nailing




Retrograde Femoral Nailing

Triangle holds femur reduced (prevents sagging)



Tibia Reduced For:

- Open Reduction and Internal Fixation (ORIF)
- Application of uni- or multi-plane external fixator
- Knee ligament repairs and/or reconstruction



Robb Leg Positioner

Provides stable positioning of the knee during surgery



Slotted base allows the leg to be easily flexed or extended during knee surgery. Slots are also designed to allow the foot piece to be rotated. The unit can be sterilized by either gas or steam sterilization. Supplied with sterilizable table clamp which can be clamped over the sterile drape to the O.R. table side bar. Three (3) Sterile Pads/Wraps are included with each new purchase.

PRODUCT NO'S:

Base Dimensions: 21" x 11" (53,4cm x 27,9cm)

2630-11 [Leg Positioner w/Aluminum Footpiece]

Optional & Replacement Parts:

2630-FP [Aluminum Footpiece Only]


2629-00 [Case of 10 Sterile Pads/Wraps]

2595 [Table Clamp]

Designed by William Robb, MD



Sterile Pad/Wrap

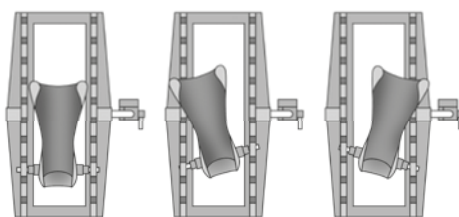

Patient Self Stress Assembly Set

Designed to help position a patient for X-ray evaluation to help determine candidacy for Unicompartamental Knee Arthroplasty



Used to help obtain a valgus stress view radiograph that will show a corrected medial compartment to test the functionality of the lateral compartment, with visualization of the patella in a true AP position and a flat tibial plateau.

PRODUCT NO'S:

2741-00 [Set]

Individual Positioners:

2741-01 [Triangle Positioner]



Dimensions: 24" x 9" x 9" (61 cm x 23 cm x 23 cm)


2741-02 [Contoured Cube]

Dimensions: 11" x 9" x 6" (28 cm x 23 cm x 15,2 cm)




Designed by Kyle Cook, RTR and David Mauerhan, MD

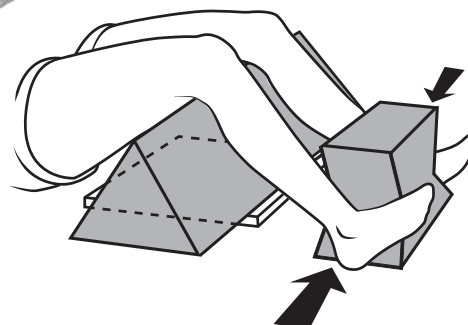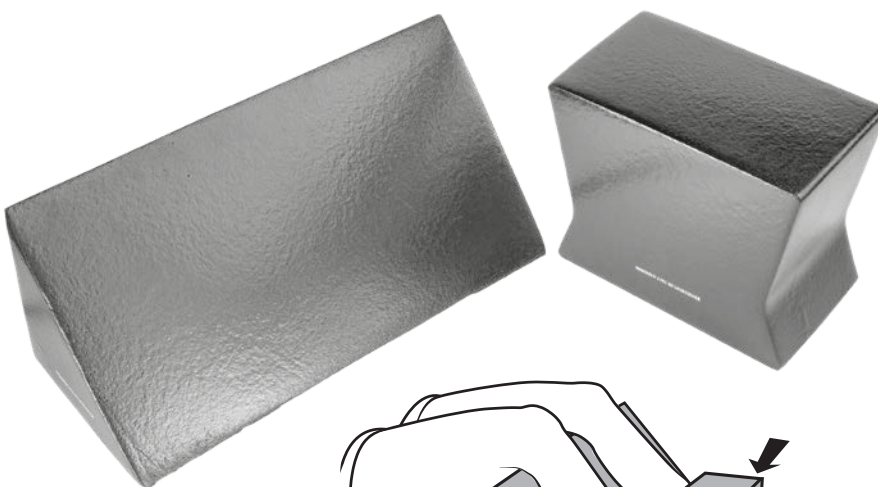


Tilt Bar

Loosening the Tilt Bar allows the knee to be tilted in either direction. Tightening the bar locks the Yoke System in the desired position.

Ratchet

The Ratchet allows the Yoke Assembly to be moved in a precise gradual manner, the length of the Track. For faster adjustments, downward pressure on the Ratchet Handle releases the Yoke Assembly which then can be easily slid the length of the Track.

Rotation Bar

Loosening the Rotation Bar allows the knee to be rotated in either direction. Tightening the bar locks the Yoke System in the desired direction.




Compatible with the Innomed's Stulberg & Robb Leg Positioners

**Stulberg Leg Positioner**

Provides stable positioning of the knee during surgery

Allows the leg to be manipulated into the desired position and securely locked in place. It has the necessary adjustments to tilt, rotate, and flex or extend the knee. Extension/flexion adjustments can be made with quick release of the ratchet. In use, the base plate is clamped onto the operating table with the vertical side bar. The base plate is then draped and the sterile support plate lowered into the base plate. The patient's foot is wrapped into the foot support with a sterile bandage (additional padding may be used for thin tibias). The complete unit is steam and gas sterilizable. Three (3) Sterile Pads/Wraps are included with each new purchase.

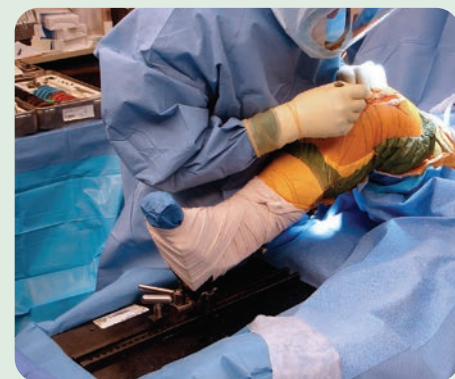**PRODUCT NO'S:**

Base Dimensions: 20" x 10.5" (50,8 cm x 26,7 cm)

2620-10 [Leg Positioner w/Aluminum Footpiece]

Optional & Replacement Parts:

2620-FP [Aluminum Footpiece Only]

2629-00 [Case of 10 Sterile Pads/Wraps]

Designed by S. David Stulberg, MD

**Knee Positioner Sterile Protective Pad & Wrap**

Disposable, latex-free sterile foam pad and cohesive wrap helps protect patient from pressure sores, abrasions and possible neurological impairment while securing foot into the boot

PRODUCT NO'S:

2629-00 [Case of 10 Sets - 1 Pad/Wrap per Set]

2629-L [1 Set - 1 Pad & 1 Wrap]



Hyperflex Foot Positioner Assembly

Designed to help secure the foot for positioning of the knee in the hyperflex position

PRODUCT NO'S:

2589-00 [Complete Assembly]
Overall Length: 19" (48,3 cm)

Individual/Replacement Parts:

2589-01 [Foot Positioner]
Overall Length: 18" (45,7 cm)

2590-B [Positioner Bar]
Overall Length: 19" (48,3 cm)


2730-P [Pad & Two Straps]

4150-PS [Post Screw]

Optional Parts:

2590-S [Black Straps] Pkg of 10

Designed by Morteza Meftah, MD and Ira Kirschenbaum, MD

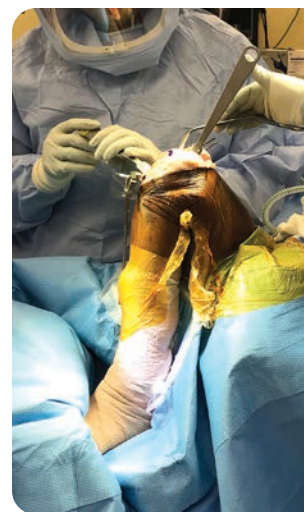

Stanton Arthroscopic Leg Holder

Designed to securely hold legs of various sizes for arthroscopic surgery

- ▶ Sliding leg holder can be adjusted for small calves or to accommodate large thighs
- ▶ Locking pin prevents sides from spreading apart
- ▶ Strap can be placed high or low through the slots in the side plates to accommodate large/small limbs
- ▶ Strap is strongly secured with a toothed clamp
- ▶ Support rod, when clamped into a standard table clamp, helps to prevent rotation

PRODUCT NO'S:


4045
Dimensions: 16.5" L x 8.5" H x 3.5" W
(42 cm L x 21,6 cm H x 8,9 cm W)
Fits Legs: From 4" to 11" (10 cm to 28 cm)

Replacement Parts

4045-S [Strap]

Overall Length: 28" (71,2 cm)

Designed by
John Stanton, MD

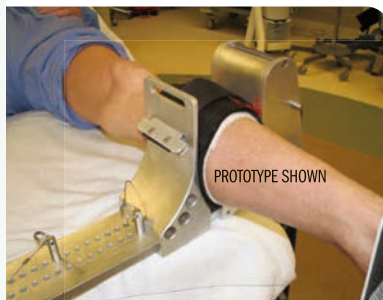

George Arthroscopic Knee Positioner

Provides lateral and superior support which allows valgus stress to open the medial compartment

Shape does not squeeze the thigh, making the need for a thigh tourniquet optional. If desired, the unit can easily be rotated out of the way without disrupting the sterile field. Using with a standard operating table clamp, the unit can easily be raised or lowered to accommodate all thigh sizes.

PRODUCT NO'S:





2735
Overall Height: 22" (55,9 cm)
Post Height: 12" (30,5 cm)
Pad Width: 3" (7,6 cm)

Replacement Parts

2735-P [Pad]

Designed by Michael S. George, MD



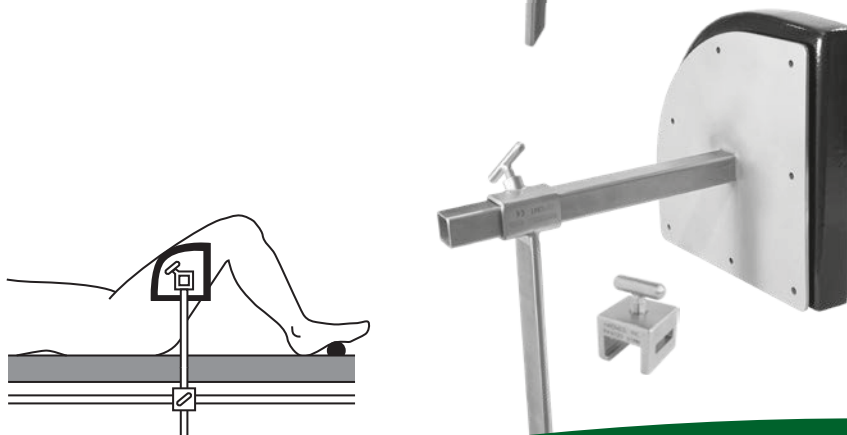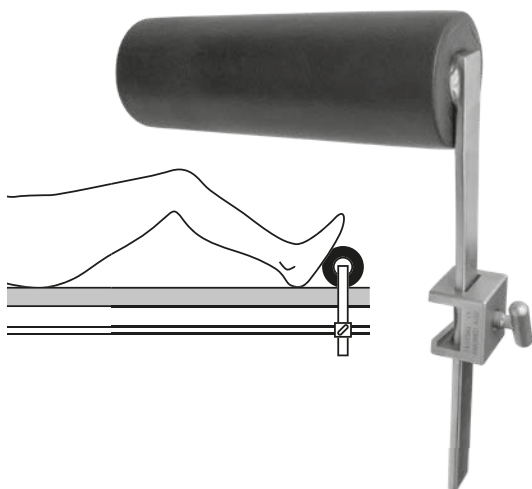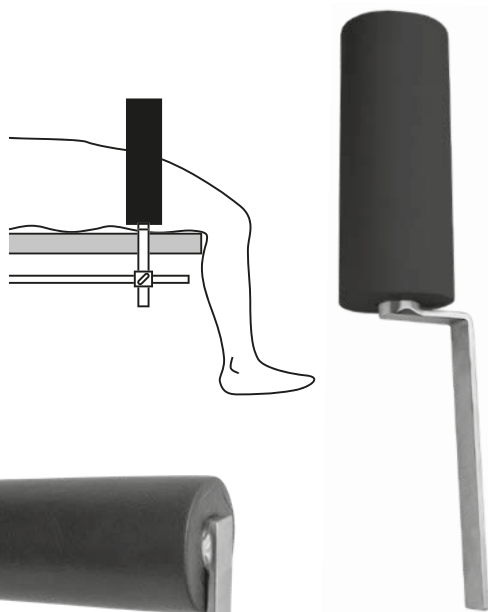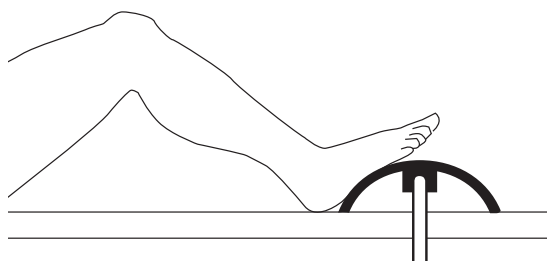

Kirschenbaum Foot Positioner

Helps eliminate the use of sand bags under the drape during total knee surgery

The foot rest is dome shaped for optimal foot contact and positioning the leg in flexion, and can be rotated. The unit can be used under the drape by attaching it to a standard table attachment or it can be sterilized for use on top of the drape. It can be attached to the table with the optional sterilizable table clamp. Supplied with a removable, sterilizable silicone foot pad.

PRODUCT NO'S:	
2590	[Foot Positioner – Long] 15.5" x 6" (39,4 cm x 15,2 cm)
2591	[Foot Positioner – Short] 9.5" x 6" (24,1 cm x 15,2 cm)
Optional & Replacement Parts:	
2590-P	[Large Replacement Pad] 16" x 9" (40,7 cm x 22,9 cm)
2591-P	[Small Replacement Pad] 9.5" x 9.25" (24,1 cm x 23,5 cm)
2595	[Optional Table Clamp]



Designed by Ira Kirschenbaum, MD

Leg Stabilizer

Useful in arthroscopic knee surgery to hold the leg in position

Helps to open up the knee joint when pressure is applied to the lower leg. Sterilizable table clamp included.

PRODUCT NO'S:	
8840	Overall Length: 18.5" (47 cm) Handle Length: 9.25" (23,5 cm) Pad Diameter: 3" (7,6 cm)
Replacement Parts:	
9120	[Table Clamp]
8840-P	[Pad]

Designed by Gregory Fanelli, MD



Modified 90° Leg Stabilizer

Useful in total knee surgery to hold the leg in position

PRODUCT NO'S:	
2725	Post Height: 11.375" (28,9 cm) Pad Length: 9" (22,9 cm) Pad Diameter: 3" (7,6 cm)
Replacement Parts:	
9120	[Table Clamp]
8840-P	[Pad]

Sterilizable table clamp included.

Designed by Gregory Fanelli, MD



Durham Leg Positioner


Placed against the thigh, helping to hold the leg upright in knee surgery

Supplied with a sterilizable table clamp. The pad is made of semi-dense foam to help prevent pressure points and is sealed with a washable coating.

PRODUCT NO'S:	
4105	
Replacement Parts:	
9120	[Table Clamp]
4105-P	[Pad]

Designed by Al Durham, MD



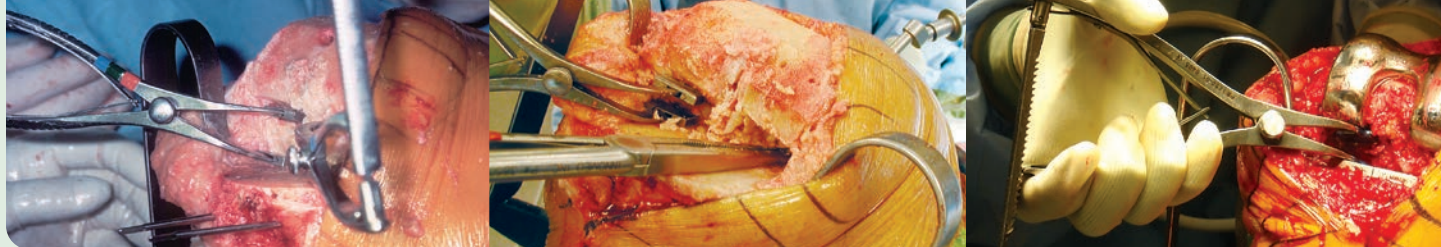

Calibrated Femoral Tibial Spreaders

A wide unobstructed view of the posterior compartment is possible. Osteophytes on the posterior condyles of the femur and tibia can be seen and removed.

Designed to remain in position, with the femur and tibia separated, without the need of an assistant, and to minimize crushing the bone, even if osteoporotic



PRODUCT NO'S:

SMALL

1850 [Small w/Grooved Pads]
Overall Length: 7" (17,8 cm)
Pads: 23 x 12 mm
Opens to 39 mm

1850-D [Small w/Diamond Cut Pads]
Overall Length: 7" (17,8 cm)
Pads: 23 x 12 mm
Opens to 39 mm

1850-LR [Small with Grooved Pads and Locking Mechanism] **New!**
Overall Length: 7" (17,8 cm)
Pads: 23 x 12 mm
Opens to 39 mm

1850-01 [Small w/Coated Pads]
Overall Length: 7" (17,8 cm)
Pads: 18 x 15 mm
Opens to 39 mm

1865 [Small w/Round Pads]
Overall Length: 7" (17,8 cm)
Pads: 25 x 25 mm
Opens to 39 mm

1865-LR [Small with Round Pads & Locking Mechanism] **New!**
Overall Length: 7" (17,8 cm)
Pads: 25 x 25 mm
Opens to 39 mm



Small - 7"

Small with Grooved Pads

Small with Coated Pads

Small with Round Pads

New!
Locking ratchet mechanism helps prevent accidental release, and provides for controlled adjustment and easy release



Small with Grooved Pads and Locking Mechanism



Small with Round Pads and Locking Mechanism

PRODUCT NO'S:

MEDIUM

1855 [Medium w/Grooved Pads]
Overall Length: 10" (25,4 cm)
Pads: 23 x 14 mm
Opens to 50 mm

1855-D [Medium w/Diamond Cut Pads]
Overall Length: 10" (25,4 cm)
Pads: 23 x 14 mm
Opens to 50 mm

1855-SL [Medium w/Speed Lock & Grooved Pads]
Overall Length: 10" (25,4 cm)
Pads: 23 x 14 mm
Opens to 50 mm

1866 [Medium w/Round Pads]
Overall Length: 10" (25,4 cm)
Pads: 25 x 25 mm
Opens to 50 mm



Medium - 10"

Medium with Grooved Pads

Medium with Speed Lock & Grooved Pads

Medium with Round Pads

Speed lock modification designed by Nasim A. Rana, MD

PRODUCT NO:

LARGE

1860 [Large w/Grooved Pads]
Overall Length: 12" (30,5 cm)
Pads: 25 x 16 mm
Opens to 65 mm



Large - 12"

Large with Grooved Pads

Locking Ratchet Mechanism Version

Helps prevent accidental release, and provides for controlled adjustment and easy release.

Speed Lock Version

Helps allow precise control and prevent unintended release.

Coated Pad Version

Helps protect component surfaces when implants are in place, and are slightly contoured to add stability against the curved articulating implant surfaces.



Grooved Pads

Diamond Cut Pads

Coated Pads



Lawrence Revision Knee Gap Balancing Tensioner Set

Designed to help tense the medial and lateral ligaments during total knee surgery, and can help prevent impingement of a 4-in-1 block

PRODUCT NO'S:

1896-01 [Set – Left & Right]

Also available individually:

1896-01L [Left]

Overall Length: 9.25" (23,5 cm)
Pad Diameter: 1" (2,5 cm)

1896-01R [Right]

Overall Length: 9.25" (23,5 cm)
Pad Diameter: 1" (2,5 cm)




Designed by Jeffrey M. Lawrence, MD



Four Pad Configurations Available

Scott Femoral Tibial Tensor/Spreader

Used before determining femoral component rotation to help properly tense the medial and lateral ligaments and help assure a stable, balanced flexion gap

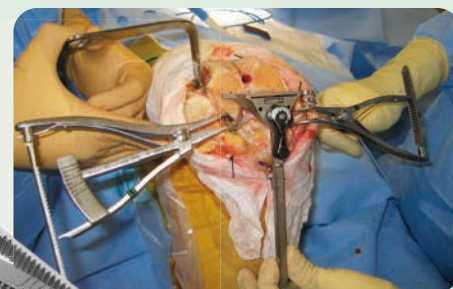

An important part of surgical technique during total knee arthroplasty is the establishment of a symmetric balanced flexion gap. This can be achieved by tensing the medial and lateral ligaments

with laminar spreaders and rotating the femoral component until a rectangular space is formed. The calibrated Tensor/Spreader allows the surgeon to choose a reproducible amount of tension across the medial or lateral flexion space.

In the varus knee, any medial release necessary to balance the knee in extension is performed first. In the valgus knee, the flexion gap can be balanced before the extension gap if the lateral retinaculum (not the lateral collateral ligament) is all that needs releasing to correct the deformity.

The spreader can be used before or after tibial preparation and also during revision surgery after a well-aligned tibial platform has been established.

PRODUCT NO'S:

1995 [Narrow Fixed Pads]

Overall Length: 7" (17,8 cm)

Blade Width: 7 mm

Opens to: 40 mm

1996* [Wide Fixed Pads]

Overall Length: 7" (17,8 cm)

Pads: 22 mm x 13 mm

Opens to: 40 mm

1997 [Wide Block Pads]

Overall Length: 7" (17,8 cm)

Pads: 23 mm x 12 mm

Opens to: 40 mm

1998 [Round Pads]

Overall Length: 7" (17,8 cm)

Pads: 25 mm x 25 mm

Opens to: 40 mm

Designed by Richard Scott, MD*

*Pad Modification for Wide Fixed Pad Designed by Raymond H. Kim, MD

Surgical technique available on our website.

US Patent #8,162,951 B2



Narrow Fixed Pads

Wide Fixed Pads

Wide Block Pads

Round Pads

Original with narrow pads, designed to be used before making the femoral and tibial cuts.

Three wide pad styles, designed for use after the cuts have been made.



Lombardi Gap Balancing Femoral Tibial Spreader with Easy Release Locking Mechanism

Designed to help separate the femur and tibia during total knee procedures, with the pads being parallel when measured at 20mm of separation

Locking ratchet mechanism helps prevent accidental release, and provides for controlled adjustment and easy release.

PRODUCT NO'S:

1878-LR [Large]

Overall Length: 9.625" (24,4 cm)
Pads: 22 mm x 13 mm
Opens to 45 mm

1877-LR [Small]

Overall Length: 7" (17,8 cm)
Pads: 22 mm x 13 mm
Opens to 35 mm

Spreader designed by
Adolph V. Lombardi Jr., MD.

Locking mechanism designed by
Munish C. Gupta, MD




Parallel
at 20 mm

Lombardi Gap Balancing Femoral Tibial Spreader

Designed to help separate the femur and tibia during total knee procedures, with the pads being parallel when measured at 20 mm of separation

The calibrated handle of the spreader helps to accurately gauge the gap, and makes it possible for two spreaders to be used to assist in balancing ligaments.



PRODUCT NO'S:

Horizontal Grooved Pads

1878 [Large]

Overall Length: 9.25" (23,5 cm)
Pads: 22 mm x 13 mm
Opens to 50 mm

1877 [Small]

Overall Length: 7" (17,8 cm)
Pads: 22 mm x 13 mm
Opens to 35 mm

Diamond Cut Pads

1878-D [Large]


Overall Length: 9.25" (23,5 cm)
Pads: 22 mm x 13 mm
Opens to 50 mm

1877-D [Small]

Overall Length: 7" (17,8 cm)
Pads: 22 mm x 13 mm
Opens to 35 mm



Designed by Adolph V. Lombardi Jr., MD

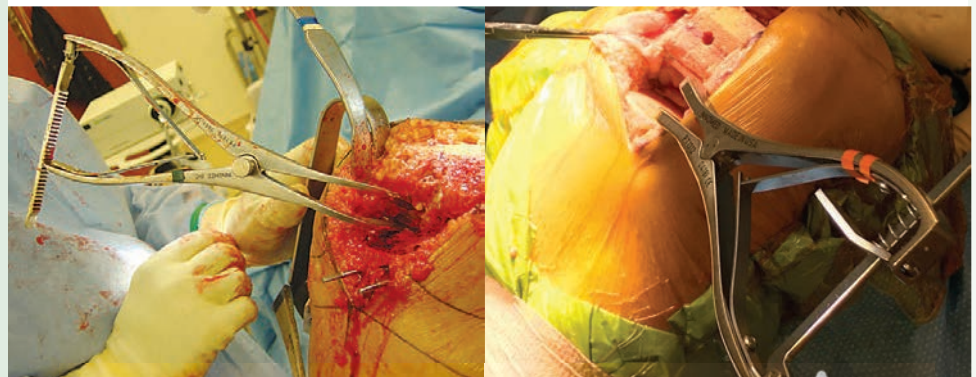

Femoral Tibial Coated Spreader Bar

Designed to separate the femur and tibia when implant components are in place

The end is coated to help protect from scratching component surfaces.

PRODUCT NO:

1820

Overall Length: 13" (33 cm)
Coated Surface: 4" (10,2 cm)
Blade Width: 13 mm





Lombardi Femoral Tibial Spreader with Easy Release Locking Mechanism


Locking ratchet mechanism helps prevent accidental release, and provides for controlled adjustment and easy release

Thin pads help to separate the femur and tibia during total knee procedures

PRODUCT NO'S:

1875-LR [Large]
Overall Length: 9.625" (24,4 cm)
Pads: 22 mm x 13 mm
Opens to 45 mm


1876-LR [Small]
Overall Length: 7" (17,8 cm)
Pads: 22 mm x 13 mm
Opens to 35 mm

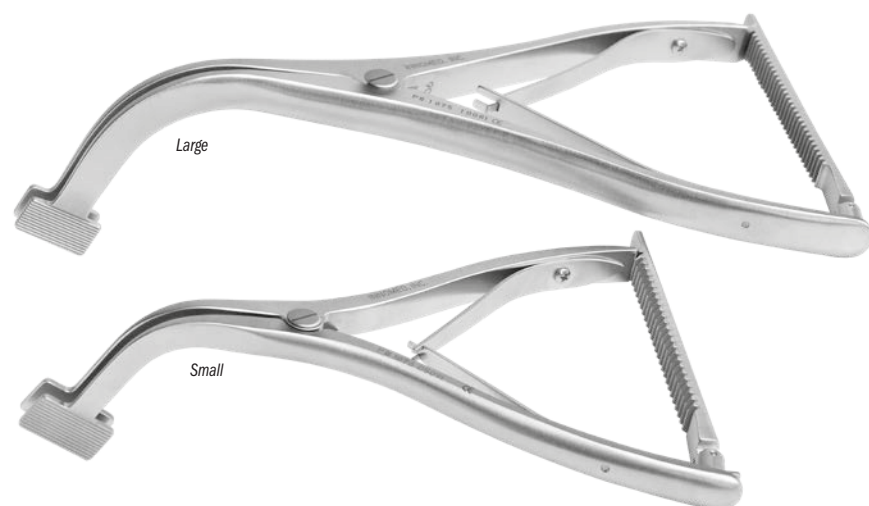

Lombardi Femoral Tibial Spreader

Thin pads help to separate the femur and tibia during total knee procedures

The calibrated handle of the spreader helps to accurately gauge the gap, and makes it possible for two spreaders to be used to assist in balancing ligaments.



PRODUCT NO'S:

Horizontal Grooved Pads

1875 [Large]
Overall Length: 9.25" (23,5 cm)
Pads: 22 mm x 13 mm
Opens to 50 mm


1876 [Small]
Overall Length: 7" (17,8 cm)
Pads: 22 mm x 13 mm
Opens to 35 mm

Diamond Cut Pads

1875-D [Large]
Overall Length: 9.25" (23,5 cm)
Pads: 22 mm x 13 mm
Opens to 50 mm

1876-D [Small]
Overall Length: 7" (17,8 cm)
Pads: 22 mm x 13 mm
Opens to 35 mm

Designed by Adolph V. Lombardi Jr., MD

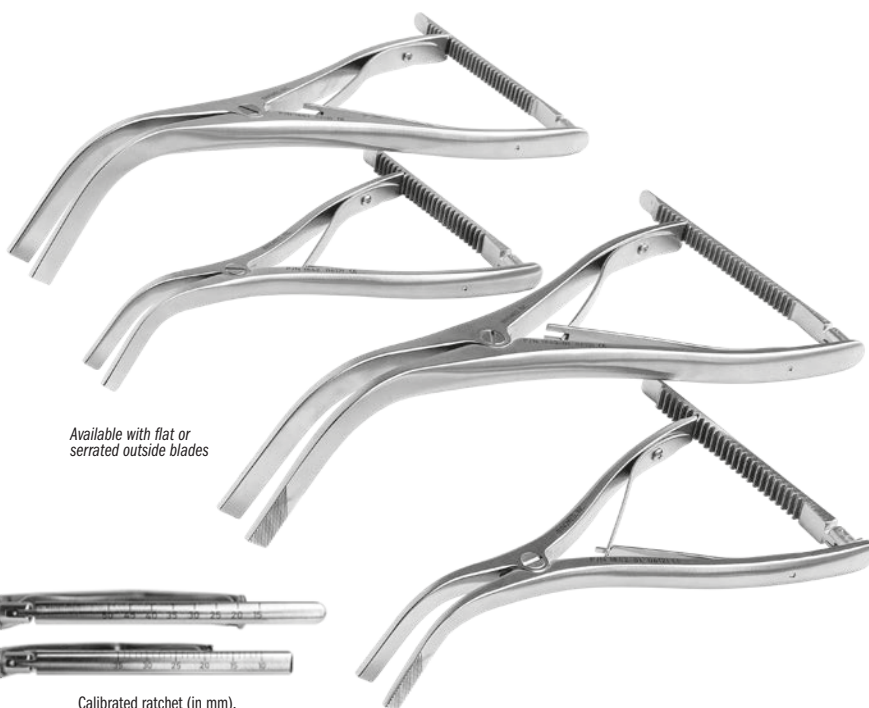

Ortho Self-Retaining Retractors

Used to separate the femur and tibia during knee replacement procedures, where the calibrated design can help to balance ligaments

- Features a no-teeth design, available with flat or serrated outside blades
- Can also be used for spine surgery where the calibrated ratchet can be used to help accurately measure the size of an opening - useful in procedures to help assess bone graft needs.
- Also useful in foot & ankle surgery



PRODUCT NO'S:

Flat Outside Pads

1842 [Small Flat]
Overall Length: 6.5" (16,5 cm)
Blade Width: 7 mm
Blade Thickness: 1.68 mm

1843 [Medium Flat]
Overall Length: 9.25" (23,5 cm)
Blade Width: 10 mm
Blade Thickness: 1.68 mm

Serrated Outside Pads

1842-01 [Small Serr.]
Overall Length: 6.5" (16,5 cm)
Blade Width: 7 mm
Blade Thickness: 1.68 mm

1843-01 [Medium Serr.]
Overall Length: 9.25" (23,5 cm)
Blade Width: 10 mm
Blade Thickness: 1.68 mm

Trans-sulcus Angle Guide

Helps establish the trans-sulcus line

A line is drawn down the deepest part of the trochlear sulcus (Whiteside line) with a marking pen or cauter. The post on the guide is inserted into the hole in the femur made for an intra-medullary alignment guide. The trans-sulcus angle guide is then rotated until the line on the guide lines up with the Whiteside line. A line is then drawn along the bottom of the guide.

PRODUCT NO:

1160

Dimensions: 2.25" x .75" (5,7 cm x 1,9 cm)
Post Depth: 1.5" (3,8 cm)

Designed by
Richard Scott, MD



Line is drawn
along bottom of guide



Sorrells Tibia Protector Plates

Designed to protect the surface of the tibia


PRODUCT NO'S:

1130 [Large] 7,5 cm x 4,5 cm

1135 [Small] 6,5 cm x 4 cm



Designed by R. Barry Sorrells, MD

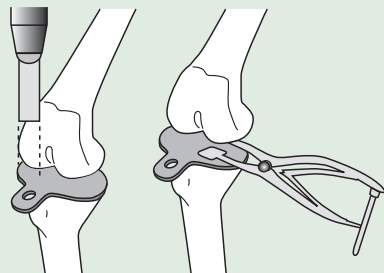

Meftah PCL Protector

Designed to help protect the posterior cruciate ligament in cruciate retaining total knee surgery during the proximal tibial cut

The PCL Protector can be used efficiently right before the tibial cut. It is curved distally so that it can put over the PCL from the top/posterior side and with a few taps, the fanned blade can get around the PCL and into the bone (not more than 5 mm) and "cover" the PCL. The protector is left in place until the tibial cut is made with a saw, which would hit the protector instead of the PCL if it gets too close.



PRODUCT NO:

3221

Overall Length: 8" (20,3 cm)



Designed by Morteza Meftah, MD

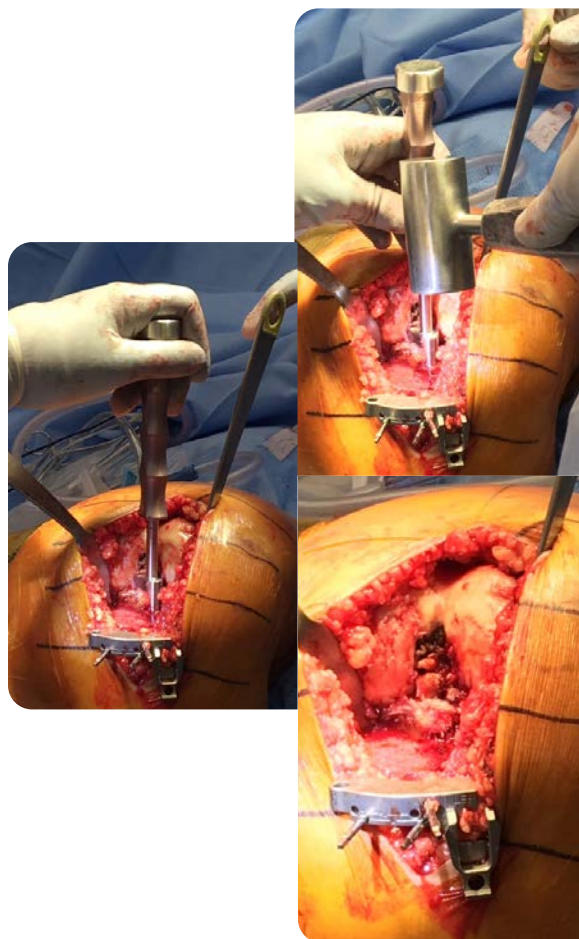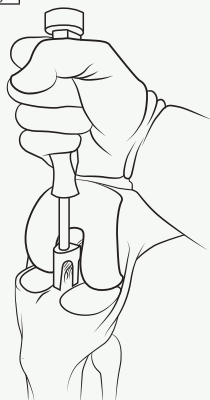

New!



Durham Curved Osteotome

Increased angle useful for posterior osteophytes of the femoral condyle and the humeral head, as well as anterior acetabular osteophytes

PRODUCT NO:

4950

Overall Length: 9" (22,9 cm)

Handle Length: 5" (12,7 cm)

Osteotome Width: .625" (1,6 cm)



Designed by Alfred A. Durham, MD



Wide Offset Osteotome

Designed to remove osteophytes from the posterior femoral condyles during knee arthroplasty


PRODUCT NO:

4920

Blade Width: 18.5 mm

Overall Length: 9" (22,9 cm)

Designed by Paul Lotke, MD
& Adam Rosen, DO

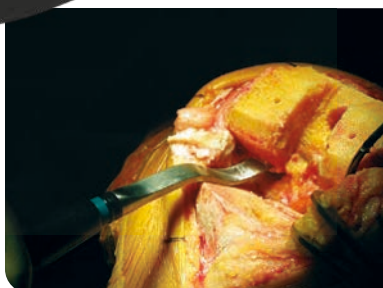

Lotke Offset Osteotome

Designed to remove osteophytes from the posterior femoral condyles during knee arthroplasty

PRODUCT NO:

4935

Blade Width: 13 mm

Overall Length: 9" (22,9 cm)

Designed by Paul Lotke, MD



Dennis Offset Osteotome

Designed to remove osteophytes from the posterior femoral condyles during knee arthroplasty

PRODUCT NO:

4935-W

Blade Width: 18.5 mm

Overall Length: 9" (22,9 cm)


Designed by Douglas Dennis, MD
& Paul Lotke, MD



Self-Retaining Knee Retractor System

*Helps free assisting personnel
while providing excellent exposure*

The Knee Retractor System holds retractors utilizing Velcro® straps. This helps eliminate obstruction of the surgeon's operative area and frees assisting personnel. Five retractor styles are available; straps are available in two lengths. Retractors and straps are autoclavable. The Retractors can be used singularly or in combination.

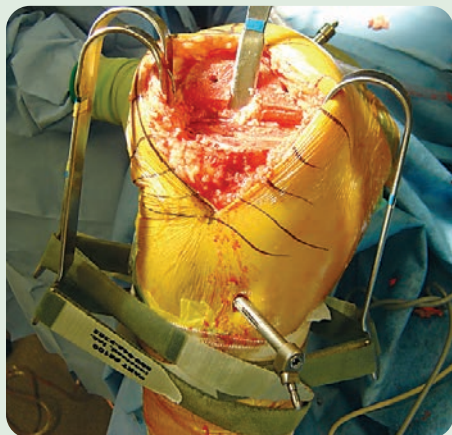

Designed by S. David Stulberg, MD



MIS Modified Wide PCL Retractor with Strap

PRODUCT NO:

3515

Overall Length: 10" (25,4 cm)
Blade Width Above Prongs: 34 mm
Prong Width: 8.5 mm | 17 mm Gap | 8.5 mm



Wide PCL Retractor with Strap

PRODUCT NO:

3525

Overall Length: 10" (25,4 cm)
Blade Width Above Prongs: 57 mm
Prong Width: 8.5 mm | 17 mm Gap | 8.5 mm



Single Prong Collateral Ligament Retractor with Strap

PRODUCT NO:

6650

Overall Length: 8.25" (21 cm)
Blade Width: 14 mm



Long Prong Collateral Ligament Retractor with Strap

PRODUCT NO:

6630

Overall Length: 8" (20,3 cm)
Overall Blade Width: 21 mm
Prong Width: 4.5 mm | 12 mm Gap | 4.5 mm



Stubbs Short Prong Collateral Ligament Retractor with Strap

PRODUCT NO:

6640

Overall Length: 8" (20,3 cm)
Blade Width Above Prongs: 27 mm
Prong Width: 4.8 mm | 3.4 mm Gap | 4.8 mm

Designed by B. Stubbs, MD

Strap

PRODUCT NO'S:


Packages of 10

8100-P [Long Strap-Femur]

8120-P [Short Strap-Tibia]



Velcro® is a registered trademark of Velcro U.S.A.

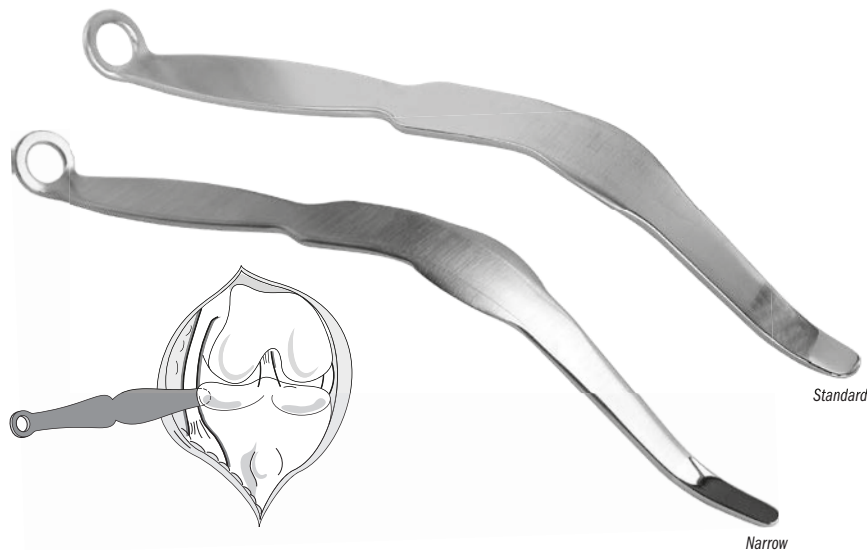

Concave Total Knee Retractor

Retracts soft tissue away from the femur and tibia

Used during total knee surgery to retract soft tissue away from the femur and tibia. The blade is designed to curve around the distal femur and tibia plateau.

PRODUCT NO'S:

6720 [Standard]
Overall Length: 9.625" (24,4 cm)
Blade Width: 15 mm

6720-01 [Narrow]
Overall Length: 9.625" (24,4 cm)
Blade Width: 9 mm



Bolanos Modified Chandler Retractor

Used for retracting tissue away from the bone

PRODUCT NO:

3222
Overall Length: 7.5" (19,1 cm)
Blade Width at Widest: 1" (2,54 cm)



Designed by Alberto Bolanos, MD

Chandler Retractors

Used for retracting tissue away from the bone, and helpful for posterior exposure of the tibia in MIS surgery

Allows the surgeon to retract soft tissue away from bone, and can be used for hip and knee surgery. The handle is contoured away from the field of view and working area. Available in three blade sizes: 5/8", 3/4" and 1".

The OrthoLucent™ version is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

PRODUCT NO'S:

3220-01 [5/8" (15,9 mm)]
Overall Length: 9.125" (23,5 cm)
Blade Width: 16 mm

3220-02 [3/4" (19 mm)]
Overall Length: 9.125" (23,5 cm)
Blade Width: 19 mm

3220-04 [1" (25,4 mm)]
Overall Length: 9.125" (23,5 cm)
Blade Width: 25.4 mm

3220-02R* [OrthoLucent™] 3/4" (19 mm)
Overall Length: 9.125" (23,5 cm)
Blade Width: 19 mm



Modular Weights

Used to help hold retractors in place

PRODUCT NO'S:

3430-01 1.5 lbs. (.68 kg)

3430-02 2.0 lbs. (.91 kg)

3430-03 2.5 lbs. (1.13 kg)
with attaching hook



MIS Utility Knee Retractor

Used interchangeably for medial exposure, lateral exposure and to assist in posterior exposure for the tibia

Helps to keep hands out of the field of view while providing retraction in minimally invasive knee surgery.

PRODUCT NO:

3220-03
Overall Length: 9" (22,9 cm)
Blade Width: 16 mm

Designed by William Robb, MD



Rosen Knee Tibial Retractor

Designed for total knee and revision total knee replacements using posterior stabilized knee components

The posterior build-up on the retractor allows the surgeon to more easily translate the tibia forward for better visualization after femoral notch preparation.


PRODUCT NO:

2830

Overall Length: 12.5" (31,8 cm)



Designed modification by Adam Rosen, DO of original design by Christopher M. Meckel, MD

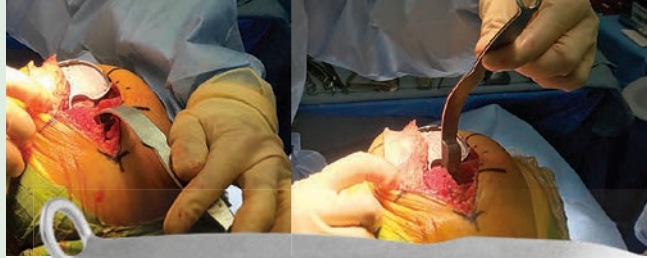

Manzary Proximal Tibial Stabilizing Knee Retractor

Designed to help subluxing the tibia anteriorly in posterior stabilizing total knee replacement, helping to expose the proximal surface for preparation

PRODUCT NO:

4531

Overall Length: 12.75" (32,4 cm)


Blade Width: 1.5" (3,8 cm)

Block Dimensions: .8" x 1.5" x .5"

(2 x 3.8 x 1.25 cm)



Design modification by Mojib Manzary, MD, FRCS of original design by D. Kevin Lester, MD, and Christopher M. Meckel, MD

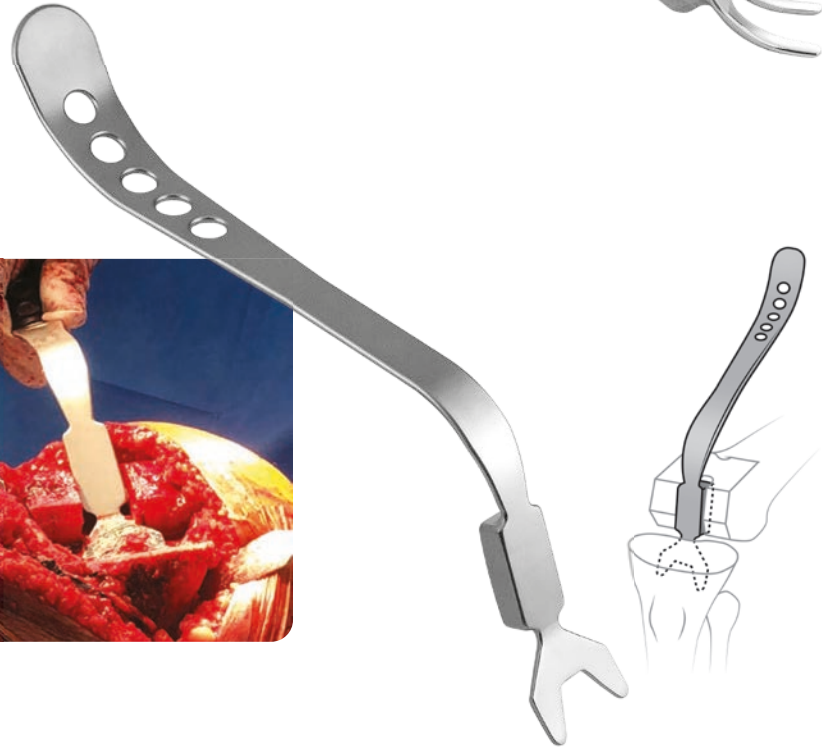

Lester Proximal Tibial TKA Retractor

Helps expose the cut surface of the tibia to allow sizing, preparation and cleansing during TKA

Also helps protect the posterior knee soft tissue structures from injury.

PRODUCT NO:

4699

Overall Length: 12" (30,5 cm)

Depth from Bend: 5" (12,7 cm)

Blade Width: 1.5" (38 mm)

Designed by D. Kevin Lester, MD



Meckel Posterior Stabilizing Knee Retractor

Designed to provide enhanced anterior translation of the tibia when doing posterior stabilized total knee replacement

The 15 mm deep blade section of the retractor is used to lever the tibia forward (by resting the tip on the posterior tibia and the middle blade section block levering off the distal femur) after the box cut has been made in the distal femur.

PRODUCT NO:


4538

Overall Length: 10" (24,5 cm)

Blade Width: 20 mm

Blade Depth: 15 mm

Designed by Christopher M. Meckel, MD

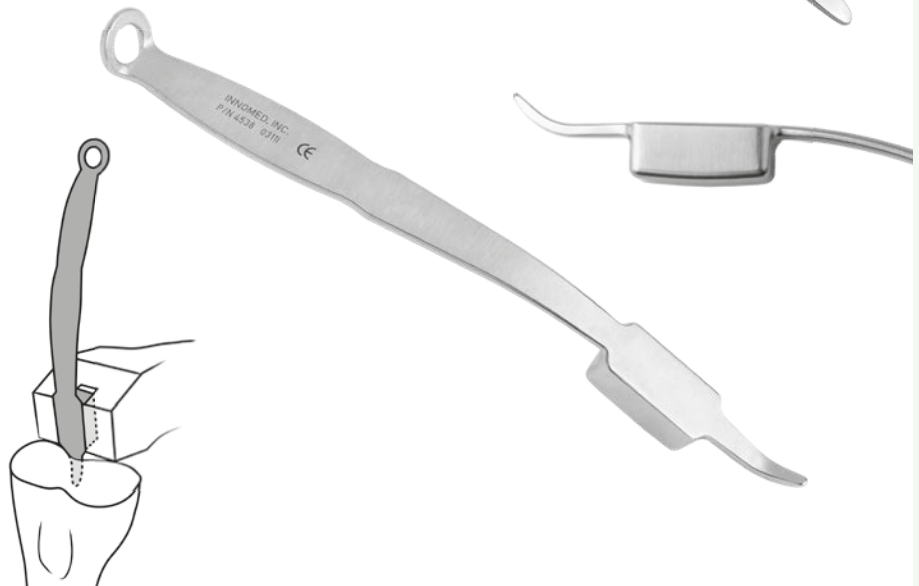




Standard



Coated Standard



OrthoLucent™ Standard

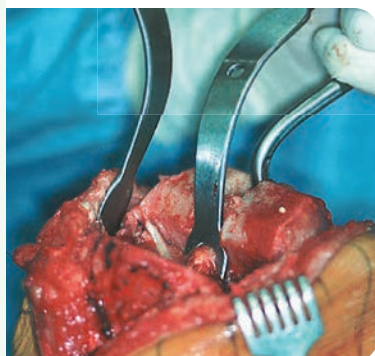

Wide Prong

Wider prongs
offer better stability

Mayo Wide Prong
with Ergonomic Handle

New!



PCL Retractors

Designed to straddle the cruciate ligament

Designed to straddle the cruciate ligament and lie in the femoral condylar notch, allowing the surgeon to retract the tibia away from the femur for better access. The handle is contoured away from the surgeon's field of view. Modular weights can be used to help hold the retractor in place.

The **OrthoLucent™** Standard PCL can be safely used to look behind the knee when the component(s) are in place without metal transfer or marring component surfaces when contact is made. It is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, and can be steam sterilized.

The **Coated** Standard PCL includes a special protective coating, applied to the areas of the instrument that may come into contact with component surfaces, to help prevent from marring the articulating surfaces.

PRODUCT NO'S:

2820 [Standard]
Overall Length: 9.875" (25,1 cm)
Prong Width: 5 mm | 10 mm Gap | 5 mm

2820-C [Coated Standard]
Overall Length: 9.875" (25,1 cm)
Prong Width: 5 mm | 10 mm Gap | 5 mm

2820-R* [OrthoLucent™ Standard]
Overall Length: 9.875" (25,1 cm)
Prong Width: 5 mm | 10 mm Gap | 5 mm


2825 [Wide Prong]
Overall Length: 9.875" (25,1 cm)
Prong Width: 8,5 mm | 11 mm Gap | 8,5 mm

2825-01 [Mayo Wide Prong with Ergonomic Handle]
Overall Length: 11" (27,9 cm)
Prong Width: 8,5 mm | 11 mm Gap | 8,5 mm

New!

Mayo Wide Prong designed by Joseph Mayo, MD.
handle designed by Munish C. Gupta, MD.

* MADE EXCLUSIVELY
FOR INNOMED IN
SWITZERLAND

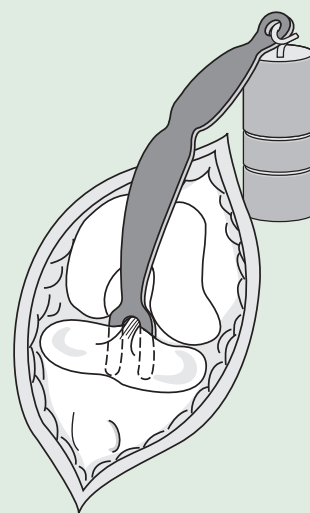

MIS PCL Retractor

PRODUCT NO:

6203
Overall Length: 12.5" (31,8 cm)
Handle Length: 6" (15,2 cm)
Blade Width: 15 mm



Designed by S. David Stulberg, MD

Wide PCL Retractor

Helps expose the proximal tibia for better surface access

Designed to expose the proximal tibia during total knee surgery for better access to the articulating surfaces. The handle is contoured to allow the surgeon a clear field of view of the operating area. Modular weights can be used to help hold the retractor in place.

PRODUCT NO:

3520 [Standard]

Overall Length: 10" (25,4 cm)
Blade Width Above Prongs: 57 mm
Prong Width: 8.5 mm | 17 mm Gap | 8.5 mm

3525 [With Velcro Strap Slots]

Overall Length: 10" (25,4 cm)
Blade Width Above Prongs: 57 mm
Prong Width: 8.5 mm | 17 mm Gap | 8.5 mm



Designed by S. David Stulberg, MD



MIS Modified Wide PCL Retractor

PRODUCT NO'S:

3510 [Standard]

Overall Length: 10" (25,4 cm)
Blade Width Above Prongs: 34 mm
Prong Width: 8.5 mm | 17 mm Gap | 8.5 mm

3515 [With Velcro Strap Slots]

Overall Length: 10" (25,4 cm)
Blade Width Above Prongs: 34 mm
Prong Width: 8.5 mm | 17 mm Gap | 8.5 mm



Designed by S. David Stulberg, MD



"S" Total Knee Retractors

Helps protect the collateral ligaments and popliteal structures while providing excellent visualization within the knee joint

The design is self-retaining and can be used singularly and in pairs. For cruciate sparing or sacrificing prosthetic designs.



PRODUCT NO'S:


3720-00 [Wide Blade]

Overall Length: 6" (15,2 cm)
Blade Width: 20 mm

3720-01 [Narrow Blade]

Overall Length: 6" (15,2 cm)
Blade Width: 10 mm

Designed by R. Barry Sorrells, MD

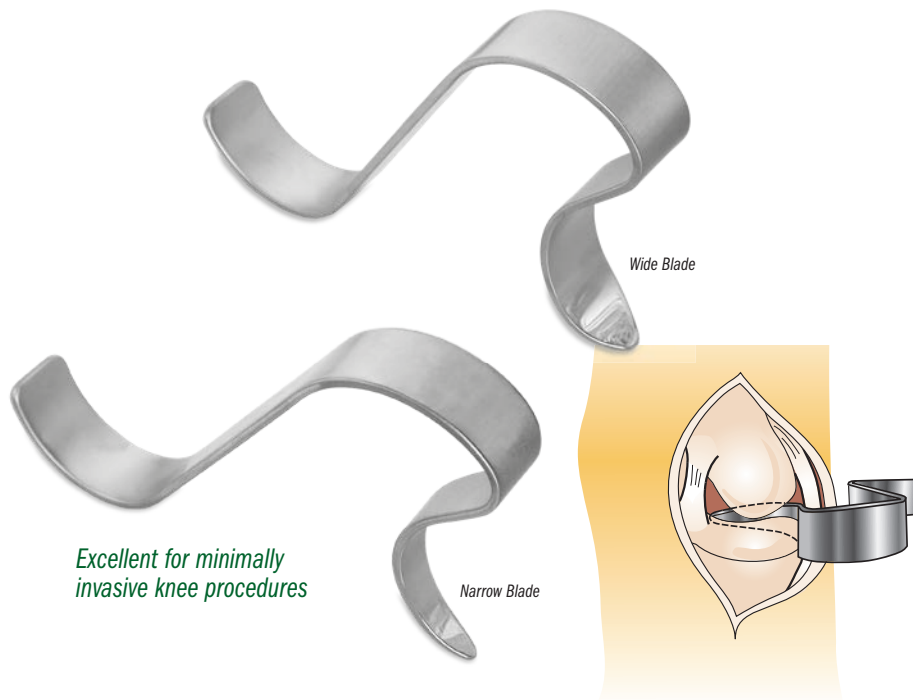

Wide Blade

Narrow Blade

Excellent for minimally invasive knee procedures



Posterior Condylar Osteophyte Retractor

Designed to provide exposure of the posterior condyle to gain access to posterior condylar osteophytes during unicompartmental and total knee arthroplasty

PRODUCT NO:

3730

Overall Length: 11.75" (29,8 cm)
Depth From 90° Bend: 3" (7,6 cm)
Length from 45° Bend: 1" (2,54 cm)
Blade Width: 1" (25,4 mm)

Designed by Andrew Glassman, MD



Booth Knee Retractor


Designed to help protect the tibial surface and to tighten the collateral ligaments and to help assess the rotation of the femur

PRODUCT NO:

6580

Overall Length: 11.75" (29,8 cm)
Handle Length: 10.5" (26,7 cm)
Blade Depth: 2.75" (7 cm)
Blade Width: 2" (5,1 cm)

Designed by Robert E. Booth, Jr., MD

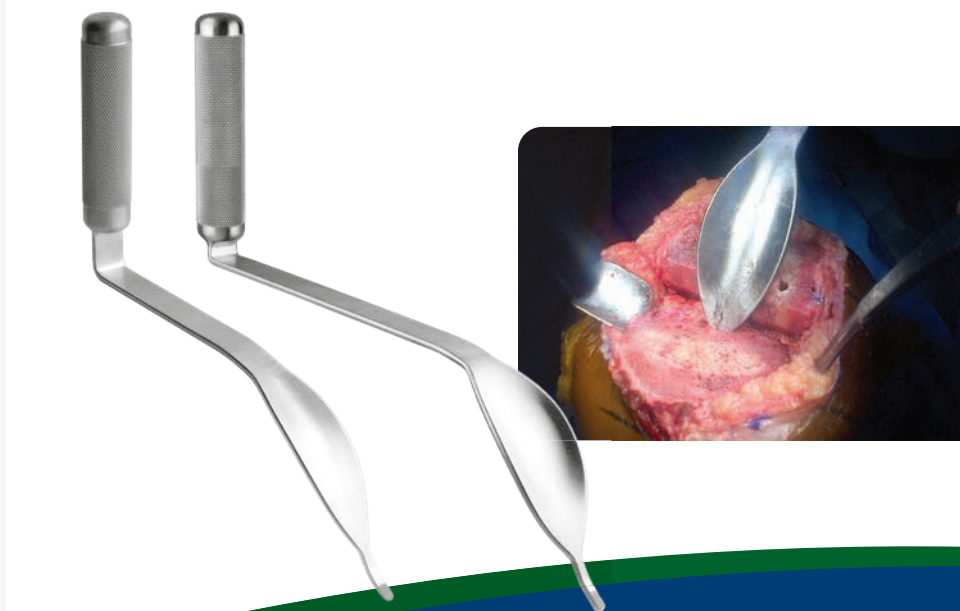

Harwin Modified Cobra Retractor

Designed for use during total hip and knee surgery

In total knee surgery, the wide blade of the large retractor spans the prepared box and helps bring the tibia forward. The small retractor helps with retraction of the medial and lateral structures, where the wide, concave blade provides added exposure over standard bent Hohmann retractors. The serrated tip helps improve stability.

PRODUCT NO'S:

6143 [Large]

Overall Length: 14.75" (37,5 cm)
Blade Width: 43,2 mm
Tongue: 25 mm x 5 mm

6143-01 [Small]

Overall Length: 12.5" (31,8 cm)
Blade Width: 30 mm
Tongue: 25 mm x 5 mm

Designed by Steven F. Harwin, MD, FACS



Bargo Femoral Lift

Designed to distract the distal femur up and away from the proximal tibia during TKR to help expose the popliteal fossa and access the soft tissues for meniscal excision

Particularly useful when using a 3D printed cutting block, where drilled access to the intramedullary canal (to help lift the femur) is unavailable.

PRODUCT NO:

3649


Overall Length: 6.75" (17.1 cm)

Handle Offset: 3.5" (8.9 cm)

Handle Length: 5" (12.7 cm)

Lift Pad: 2" x 1.675" (51 mm x 41 mm)

Designed by Lonnie Bargo, CSFA

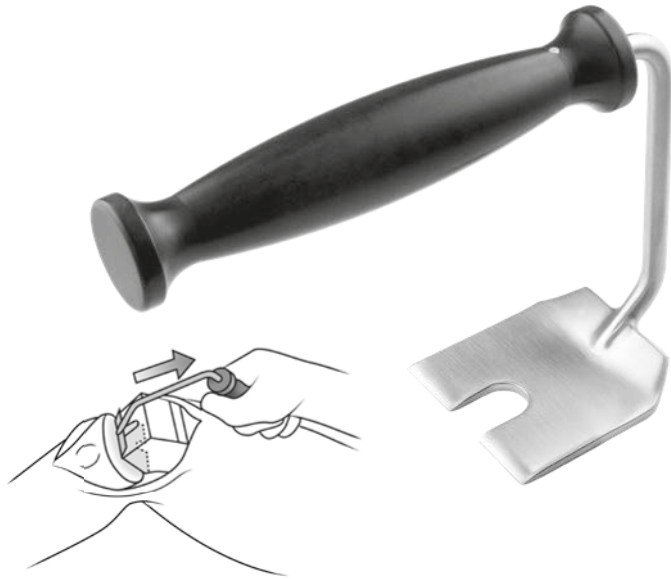

Distal Femur Distractor

Helps distract the distal femur away from the proximal tibia

Inserted into a predrilled hole in the distal femur. The bent handle allows the femur to be distracted away from the tibia. The intramedullary rod portion is fluted.

PRODUCT NO'S:

4220-00 [Standard Handle]

Overall Length: 12.75" (32.4 cm)


Rod Offset from Handle: 4.5" (11.4 cm)

4220-01 [Upward Bent Handle]

Overall Length: 17.5" (49.6 cm)

Rod Length from Bend: 12.75" (32.4 cm)

Rod Offset from Handle: 4.5" (11.4 cm)

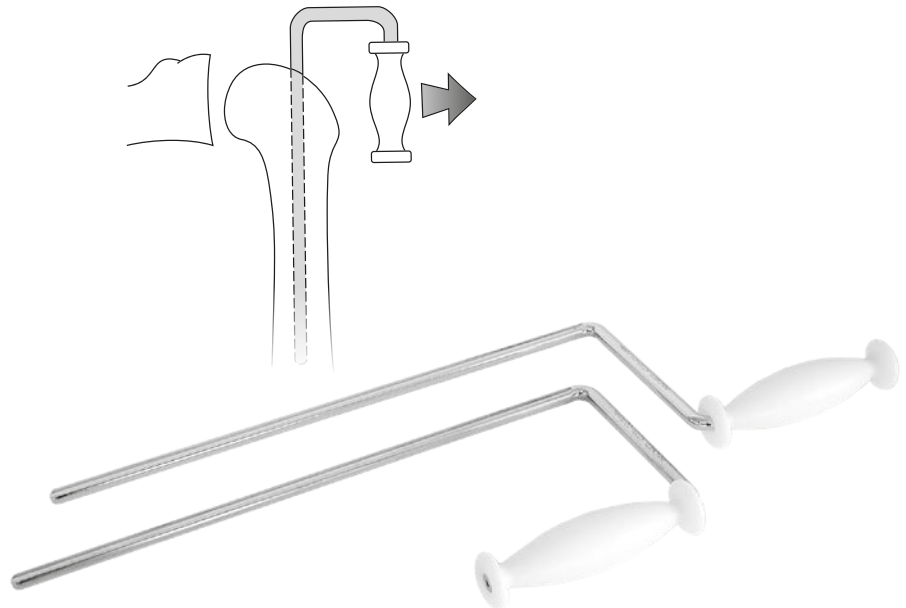

Anterior Femoral Condylar Retractor


PRODUCT NO:

3405

Overall Length: 5" (12.7 cm)

Blade Width at Widest: 45 mm

Designed by S. David Stulberg, MD

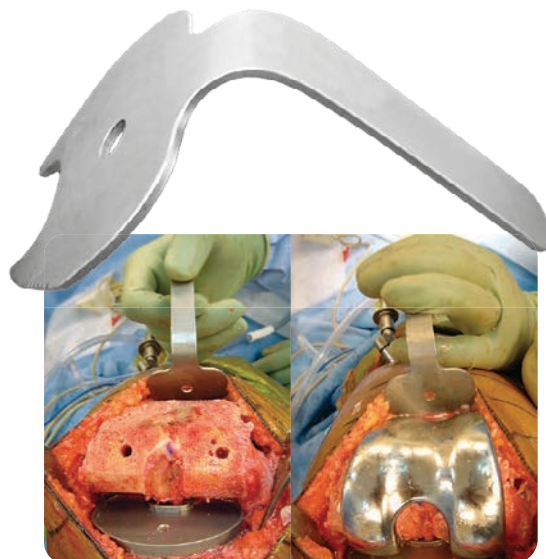

Narrow Right Angle Retractor

Designed for soft tissue retraction

PRODUCT NO:

C1011

Overall Length: 8.5" (21,6 cm)


Handle Length: 6.75" (17,1 cm)

Blade Depth: 4.5" (11,4 cm)

Blade Width: .375" (1 cm)



New!

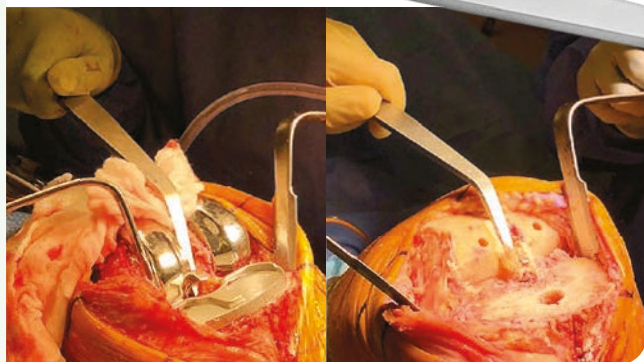

Chandran Tibial Knee Retractor

Designed for use in TKR, the hook on the front of the blade acts as a stop to help prevent the retractor from deep penetration behind the tibia


PRODUCT NO:

4533

Overall Length: 10.5" (26,7 cm)

Depth from Bend: 3" (7,6 cm)

Designed by Rama E. Chandran, MD

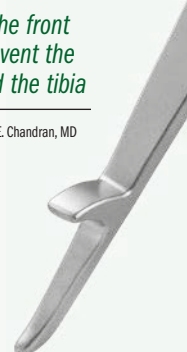

45° Knee Retractors

Designed for use around the knee

PRODUCT NO'S:

6290-00-075 [Large]

Overall Length: 9.125" (23,2 cm)

6290-00-076 [Small]

Overall Length: 7.875" (20 cm)

6290-00-077 [Medium]

Overall Length: 9.125" (23,2 cm)


6290-00-078 [Medium Straight]

Overall Length: 9.125" (23,2 cm)



Bent Hohmann Retractors—Narrow

Helps retract tissues at the margins of the joint

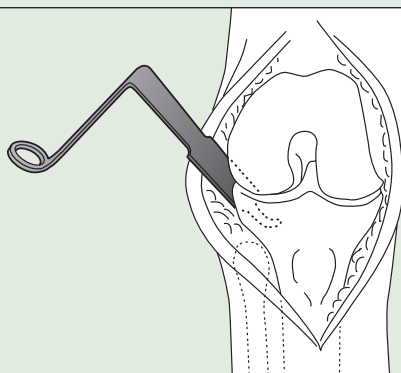

Useful for retracting tissues at the margins of the joint. Can be passed over the margins of the joint and held in place with weights or by hand.

The OrthoLucent™ version is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

PRODUCT NO'S:

7110

Overall Length: 9.75" (23,8 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 19 mm
Depth from Bend: 4.75" (12,1 cm)

7110-R* [OrthoLucent™ Narrow]

Overall Length: 9.75" (23,8 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 19 mm
Depth from Bend: 4.75" (12,1 cm)

7110-01 [Extra Long Handle]

Overall Length: 11.5" (29,2 cm)
Handle Length: 10" (25,4 cm)
Blade Width: 19 mm
Depth from Bend: 4.75" (12,1 cm)

7111 [With Extra Grip Tip]

Overall Length: 9.75" (23,8 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 19 mm
Depth from Bend: 4.25" (10,8 cm)

7115 [Short-tipped Narrow]

Overall Length: 8.625" (21,9 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 19 mm
Depth from Bend: 4.4" (11,2 cm)

7115-01 [Short-tipped
Extra Long Handle]


Overall Length: 11" (27,9 cm)
Handle Length: 10" (25,4 cm)
Blade Width: 19 mm
Depth from Bend: 4.25" (10,8 cm)

7115-03 [Extra Deep]

Overall Length: 12.125" (31,1 cm)
Handle Length: 9.75" (24,8 cm)
Depth from Bend: 6.25" (15,9 cm)
Blade Width: 19 mm



Short-tipped designed by Carl DiRaimondo, MD
Extra Grip Tip design modification by Alfred A. Durham, MD

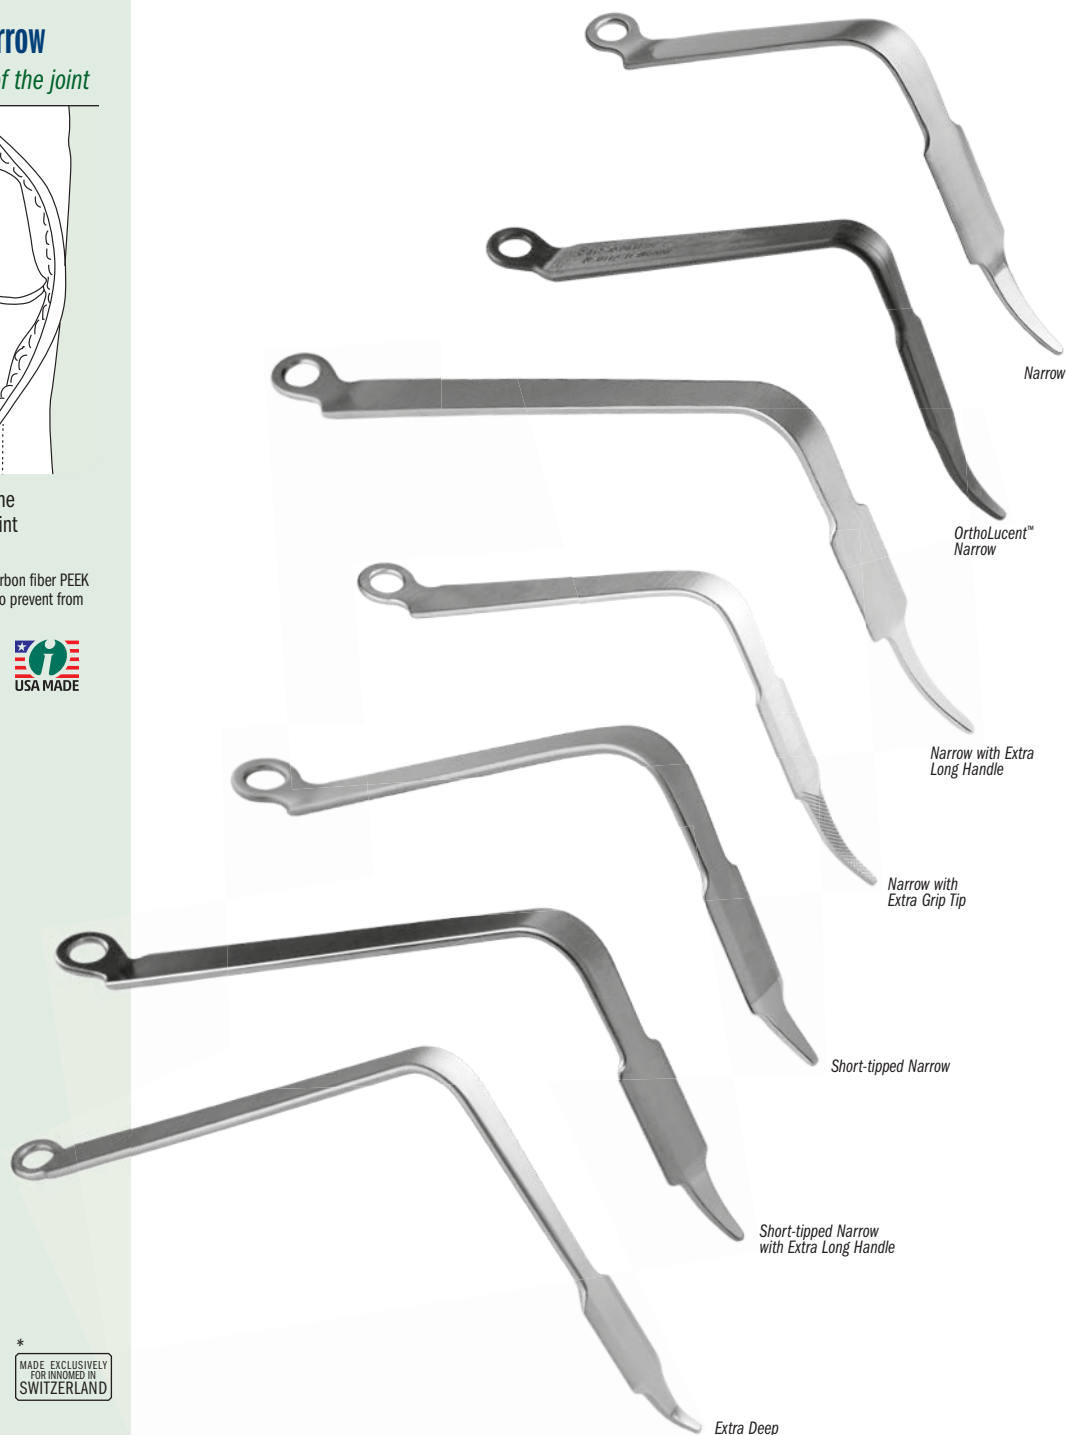

Narrow

OrthoLucent™
Narrow

Narrow with Extra
Long Handle

Narrow with
Extra Grip Tip

Short-tipped Narrow

Short-tipped Narrow
with Extra Long Handle

Extra Deep

Bent Hohmann Retractors—Wide

Helps retract tissues at the margins of the joint

PRODUCT NO'S:

6590

Overall Length: 9.375" (23,8 cm)
Handle Length: 7" (17,8 cm)
Blade Width: 41 mm
Depth from Bend: 4.75" (12,1 cm)


6590-01 [Extra Long Handle]

Overall Length: 11" (27,9 cm)
Handle Length: 9" (22,9 cm)
Blade Width: 41 mm
Depth from Bend: 5.5" (14 cm)



Wide

Wide with
Extra Long Handle

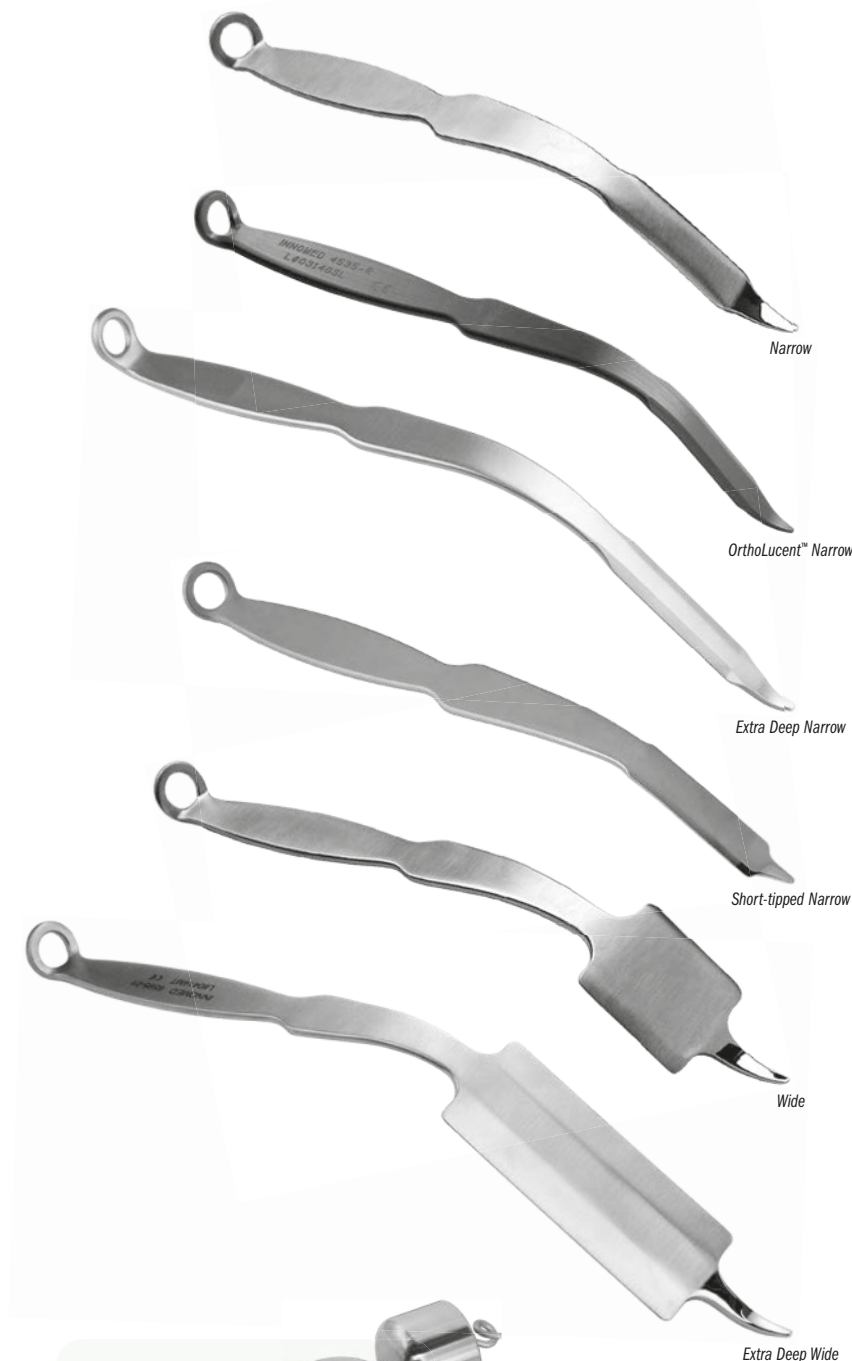

Modular Weights

Used to help hold retractors in place



PRODUCT NO'S:	
3430-01	1.5 lbs. (.68 kg)
3430-02	2.0 lbs. (.91 kg)
3430-03	2.5 lbs. (1.13 kg) with attaching hook



Modified Hohmann Retractors

Handle is contoured to allow better leverage and visualization

Useful for retracting tissues around the bone.
Can be held in place with weights or by hand.

The OrthoLucent™ version is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

PRODUCT NO'S:

4535 [Narrow] Overall Length: 10" (25,4 cm) Blade Width: 14 mm
4535-R* [OrthoLucent™ Narrow] Overall Length: 10" (25,4 cm) Blade Width: 18 mm
4535-01 [Extra Deep Narrow] Overall Length: 11.625" (29,5 cm) Blade Width: 16.4 mm
4545 [Short-tipped Narrow] Designed by Carl DiRaimondo, MD Overall Length: 9.5" (24,1 cm) Blade Width: 14 mm
6595 [Wide] Overall Length: 10" (25,4 cm) Blade Width: 42.5 mm
6595-01 [Extra Deep Wide] Overall Length: 11.5" (29,2 cm) Blade Width: 42.5 mm



Wetzell Modified Hohmann Retractor

The long point is designed to be placed around, on, or through a bony structure and then levered back to retract tissue

The handle is contoured to allow better leverage and visualization. Can be held in place with weights or by hand.

PRODUCT NO:

4539 Overall Length: 10" (25,4 cm) Blade Width: .85" (21,5 mm)
--



Designed by Robert Wetzell, MD and Todd McKinley, MD

Roose Utility Knee Retractor

Used for retraction of the soft tissues laterally or medially and for anterior translation of the tibia during tibial prosthetic insertion

The curvature and width are designed for retraction of soft tissues and excellent visualization of bone structure.


PRODUCT NO:

4532

Overall Length: 9" (22,9 cm)

Blade Width (above tip): 14 mm

Designed by Paul Roose, DO

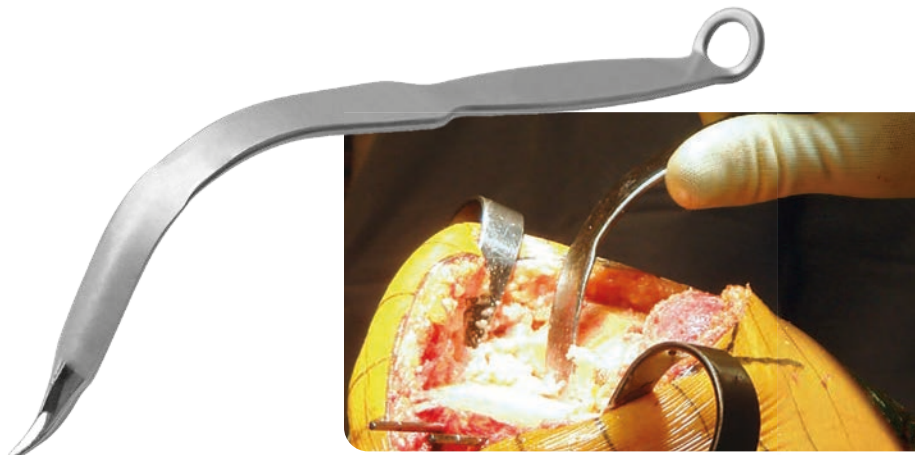

Collateral Ligament Retractor

Helps protect the lateral collateral ligament while exposing the proximal tibia


Used during total knee surgery and is inserted between the lateral collateral ligament and bone to protect the ligament and expose the proximal tibia. The dual prongs keep the retractor from rocking and assist in the insertion. The retractor is bent so that it is out of the way of the operating surgeon.

PRODUCT NO:

6620

Overall Length: 8" (20,3 cm)

Prong Width: 5 mm | 11 mm Gap | 5 mm

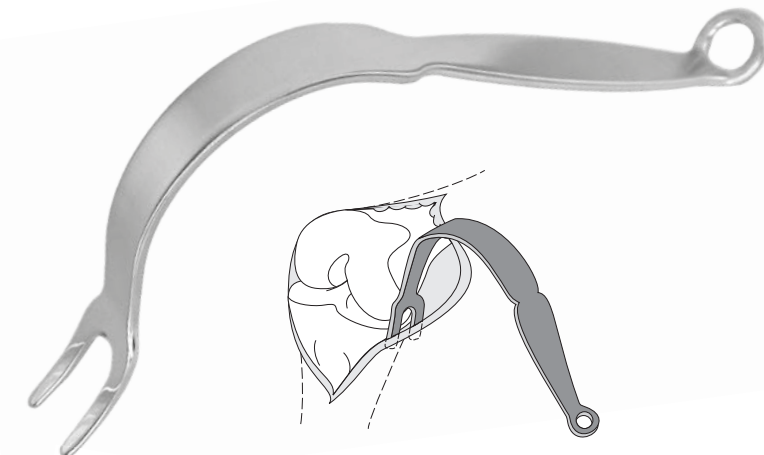

MIS Patella Retractor

PRODUCT NO:

3220-05

Overall Length: 9" (22,9 cm)

Patella Pad Width at Widest: 22 mm

Lower Blade Width at Widest: 16 mm



Designed by William Robb, MD



AORI Patellar Retractor

Designed to enhance total knee exposure


Has a deep basket and two rows of teeth to grab and hold to the lateral side of the patella. The curved handle provides a fulcrum so that the applied force will both displace and evert the patella from the femur. Retractor is placed after a routine midline, midvastus, or medial para patellar surgical approach to the knee. Once the patella is everted the retractor is applied to the lateral border of the patella.

PRODUCT NO:

4690


Overall Length: 7" (17,8 cm)

Prong Width: 10 mm | 22 mm Gap | 10 mm

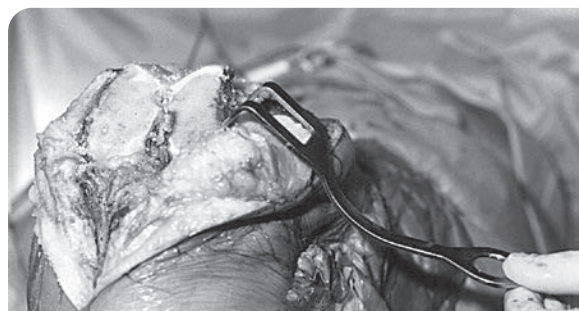 Designed by
Gerard A. Engh, MD


Modified TKA Retractor Set

Designed for soft tissue retraction, the reduced phalange allows for ease of placement in the lateral gutter, and helps avoid contact with the lateral condyle



PRODUCT NO'S:

3219-00 [Set]

Also available individually:

3219-L [Left]

Overall Length: 10" (25,4 cm)


Prong Length: 20 mm

3219-R [Right]

Overall Length: 10" (25,4 cm)

Prong Length: 20 mm

Designed by Robert Wubben, MD,
with modification by David Ott, MD

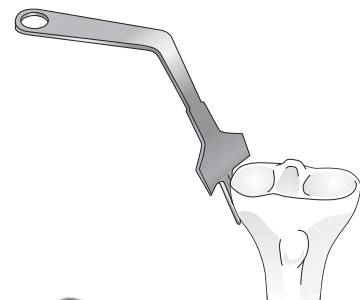

Wubben Lateral Fat Pad Retractor for TKR

Designed to hold soft tissues when inserting the TKR

PRODUCT NO:

3218

Overall Length: 10" (25,4 cm)

Blade Width: 41 mm

Designed by Robert Wubben, MD



Baldwin Lateral Soft Tissue Retractors

Designed to hold back the fat pad and soft tissues during total knee arthroplasty

The fenestrated paddle helps hold back the fat pad and soft tissues, while the two sharp-tipped prongs help penetrate the soft tissue, but have flat surfaces that rest against the side of the tibia and help prevent rotation of the instrument.

PRODUCT NO'S:

6312 [Sharp Prongs]

Overall Length: 9.875" (25,1 cm)

Pad Dimensions: 38 mm x 15 mm

Prong Depth: 22 mm


6313 [Blunt Prongs]

Overall Length: 9.75" (24,8 cm)

Pad Dimensions: 38 mm x 15 mm

Prong Depth: 20 mm

Designed by James L. Baldwin, MD

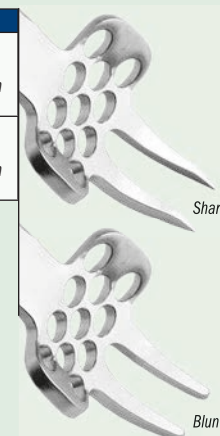

Blount Knee Retractor

Helps create better access to the articulating surfaces


Designed for retraction in total knee arthroplasty, the long narrow blade easily fits above the capsular ligament at the joint line. Can also be used for knee revision, fitting easily around the implant.

PRODUCT NO:

4850

Overall Length: 8.5" (21,6 cm)
Prong Width: 9 mm

Designed by James B. Stiehl, MD

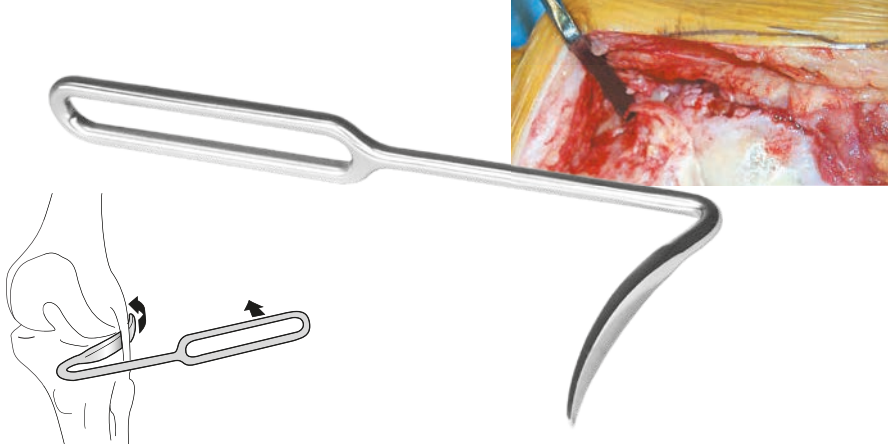

"Z" Knee Retractor


Helps create better access to the articulating surfaces

Designed to expose the femur and the tibia during knee surgery for better access to the articulating surfaces. The "Z" contouring of the retractor provides the surgeon with an open field of view and working area.

PRODUCT NO:

4420-00

Overall Length: 7.25" (18,4 cm)
Blades: 11 mm Wide, 3" Deep

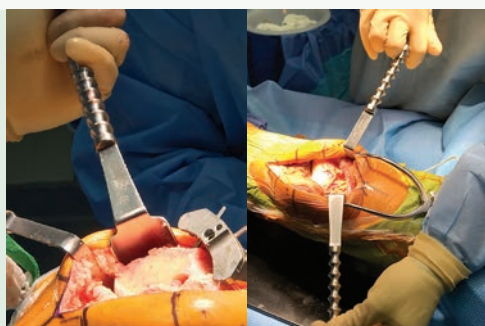

Rosen Double Ended Retractors

Helps to reduce the number of instruments on the field and to limit the need for passing instruments during the case

PRODUCT NO'S:


4005 [Army-Navy/Z]

Overall Length: 10" (25,4 cm)
Z End: 70 mm Deep, 11 mm Wide
Army Navy End: 40 mm Deep, 15 mm Wide

4010 [Richardson/Z]

Overall Length: 10" (25,4 cm)
Z End: 70 mm Deep, 11 mm Wide
Richardson End: 40 mm Deep, 37 mm Wide

Designed By
Adam Rosen, DO

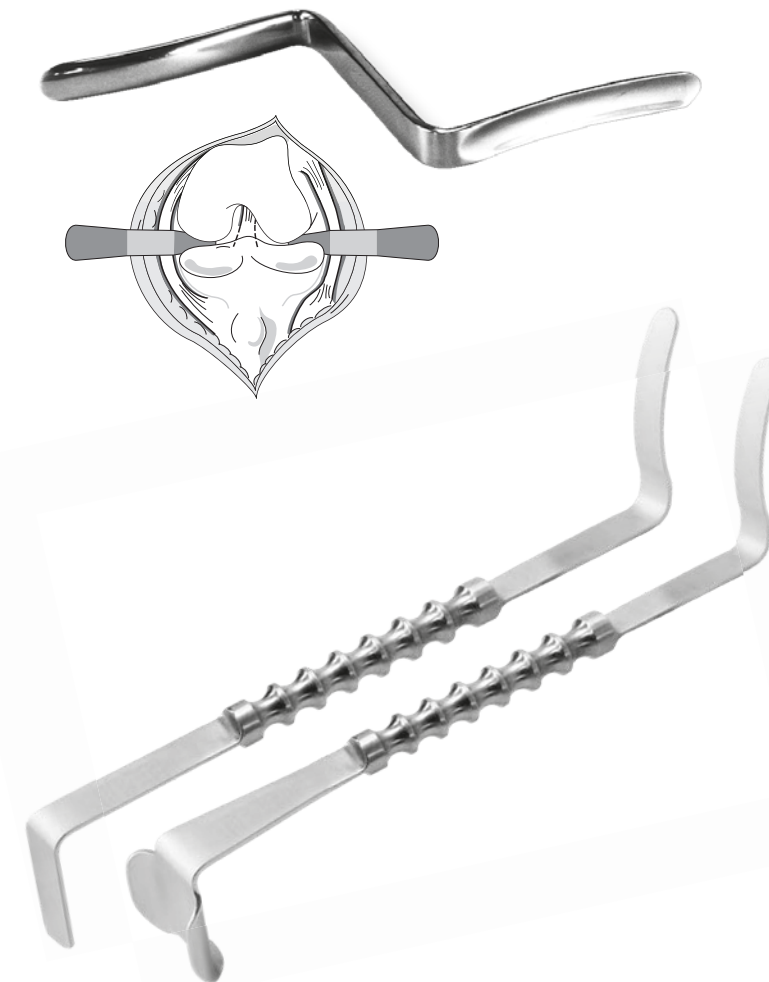

Stulberg Incision Close Gelpi & Blade Set

Designed to help expose difficult to visualize areas at the end of incisions

PRODUCT NO'S:

4269-00 [Set – 1 Gelpi & 1 Blade]

Also available Individually:

4269-01 [Gelpi]

Overall Length: 7.25" (18,4 cm)
Maximum Spread Width: 3.5" (8,9 cm)

4269-02 [Blade]

Overall Length: 5.5" (14 cm)
Blade Width: 1" (2,54 cm)
Blade Bend-Back Angle: 130°

Designed by
S. David Stulberg, MD



1 MI Small Hohmann Retractor



2 MI Large Hohmann Retractor



3 MI Condylar Retractor



4 MI Superior Retractor



5 MI Patellar Retractor




6 MI Soft Tissue Retractor



Small Hohmann Retractor



Condylar Retractor

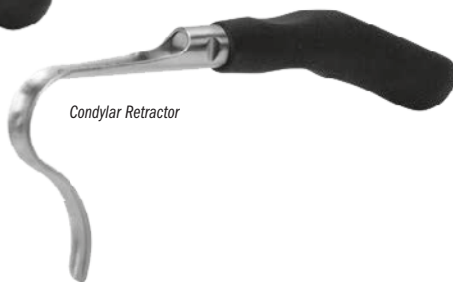

Soft Tissue Retractor



Superior Retractor



Minimally Invasive Knee Retractors

Helps provide excellent visibility and ligament protection during Total and Unicondylar Knee Replacement Surgery

PRODUCT NO'S:

S3035 [Small Hohmann Retractor]


1 Overall Length: 7.5" (19,1 cm)
Blade Width: 25 mm

S3036 [Large Hohmann Retractor]

2 Overall Length: 8" (20,3 cm)
Blade Width: 36 mm

S3037 [Condylar Retractor]

3 Overall Length: 7.5" (19,1 cm)
Blade Width: 12 mm



S3038 [Superior Retractor]

4 Overall Length: 8.75" (22,2 cm)
Blade Width: 31 mm

S3039 [Patellar Retractor]

5 Overall Length: 10.25" (26 cm)
Blade Width: 45 mm

S3042 [Soft Tissue Retractor]

6 Overall Length: 8.75" (22,2 cm)
Blade Width: 36 mm



Knee Retractors with Easy Grip Handles

Helps provide excellent visibility and ligament protection during total and unicondylar knee replacement surgery

Silicone handle helps reduce holding fatigue.

PRODUCT NO'S:

SS3035 [Small Hohmann Retractor]

Overall Length: 7" (17,8 cm)
Blade Width: 25 mm

SS3037 [Condylar Retractor]

Overall Length: 7" (17,8 cm)
Blade Width: 12 mm

SS3038 [Superior Retractor]

Overall Length: 8.25" (21 cm)
Blade Width: 31 mm

SS3042 [Soft Tissue Retractor]

Overall Length: 8.25" (21 cm)
Blade Width: 36 mm



Uni Medial/Lateral Ligament Retractor

Designed to be placed in the medial/lateral tibial recess while making the horizontal tibial cut during unicompartmental knee arthroplasty—helping to retract and protect the medial and lateral collateral ligaments

Ambidextrous, ergonomic design allows for comfortable and natural hand positioning, helping to improve MCL/LCL protection and ease of use, especially in the obese patient.

PRODUCT NO'S:



3632

Overall Length: 4.25" (10,8 cm)

Blade Width: 8.8 mm


Blade Depth: 2.375" (6 cm)

Designed by Kurt Kramer, PA-C

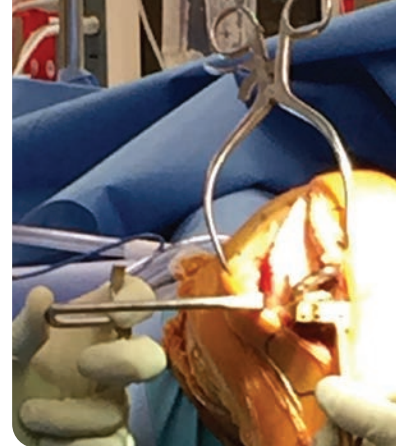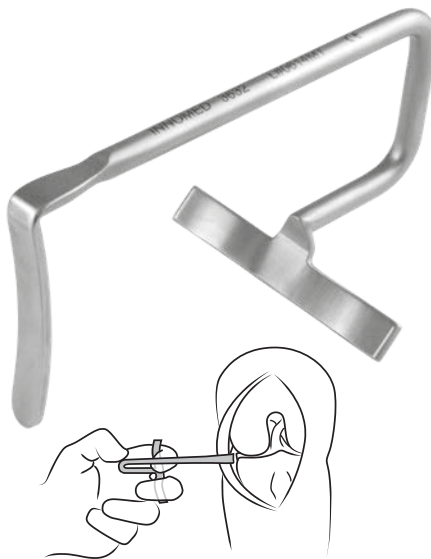

Engl Intercondylar Notch Retractors

Enhances minimally invasive exposure of the medial femoral condyle in unicompartmental arthroplasty

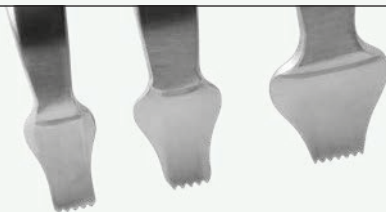

PRODUCT NO'S:

3230-01 [Small]

Blade Width at Teeth: 9 mm

Depth from Bend: 2.25" (5,7 cm)

Overall Length: 8.125" (20,6 cm)

3230-02 [Medium]

Blade Width at Teeth: 10 mm

Depth from Bend: 2.25" (5,7 cm)

Overall Length: 8.125" (20,6 cm)

3230-03 [Large]

Blade Width at Teeth: 12 mm

Depth from Bend: 2.25" (5,7 cm)

Overall Length: 8.125" (20,6 cm)

Designed by Gerard A. Engl, MD



Patient Self Stress Assembly Set

Designed to help position a patient for X-ray evaluation to help determine candidacy for Unicompartmental Knee Arthroplasty

PRODUCT NO'S:

2741-00 [Set]

Individual Positioners:


2741-01 [Triangle Positioner]

Dimensions: 24" x 9" x 9" (61 cm x 23 cm x 23 cm)

2741-02 [Contoured Cube]

Dimensions: 11" x 9" x 6" (28 cm x 23 cm x 15,2 cm)

Designed by Kyle Cook, RTR and David Mauerhan, MD

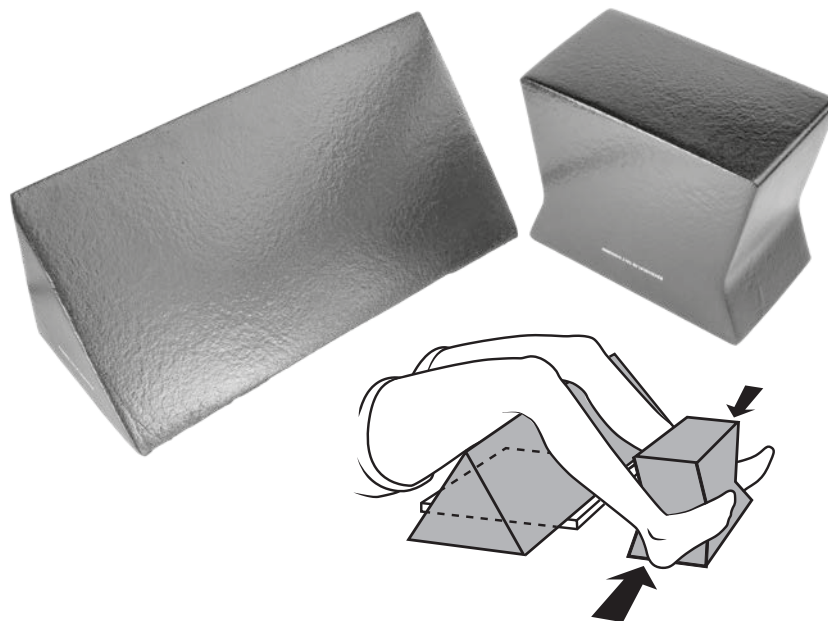

Bicos Meniscal Repair Retractor

A popliteal retractor specifically designed for meniscal repair or access to the posterior knee

Used when an inside out meniscal repair is indicated, the design facilitates retracting the posterior soft tissues of the popliteal fossa out of the way, allowing passage of meniscal repair needles.

The retractor's compact design facilitates a minimally invasive incision. The unique shape helps capture the meniscal repair needles and direct them out of the posterior incision for easy grasping and repair. Incorporates a shiny body to help reflect inside the posterior wound and aid in seeing and retrieving the needles.

PRODUCT NO:



2731

Overall Length: 5" (12,7 cm)

Depth: 1.625" (4,1 cm)

Diameter: 28 mm

Designed by James Bicos, MD

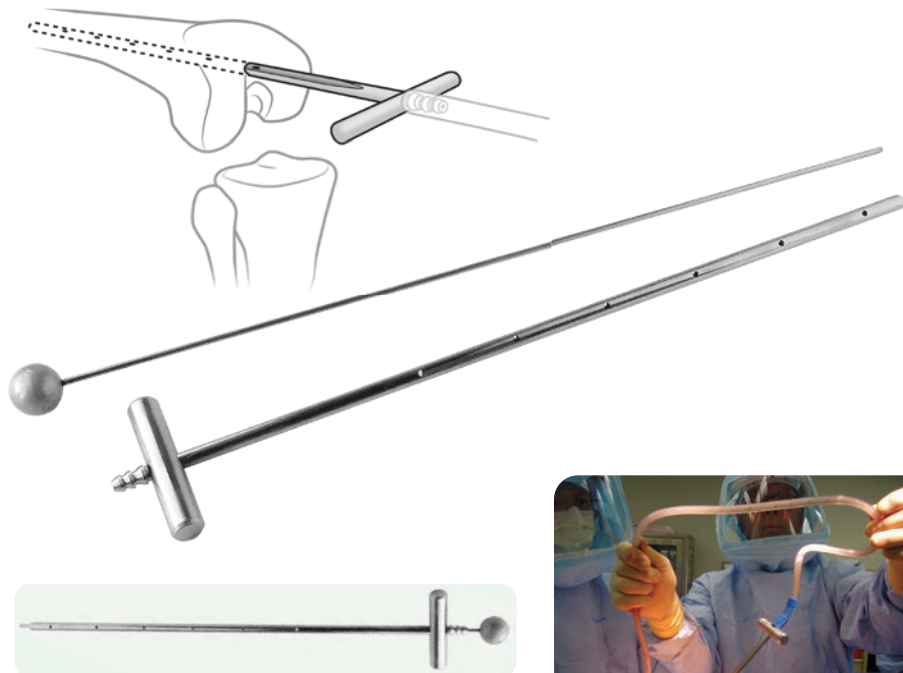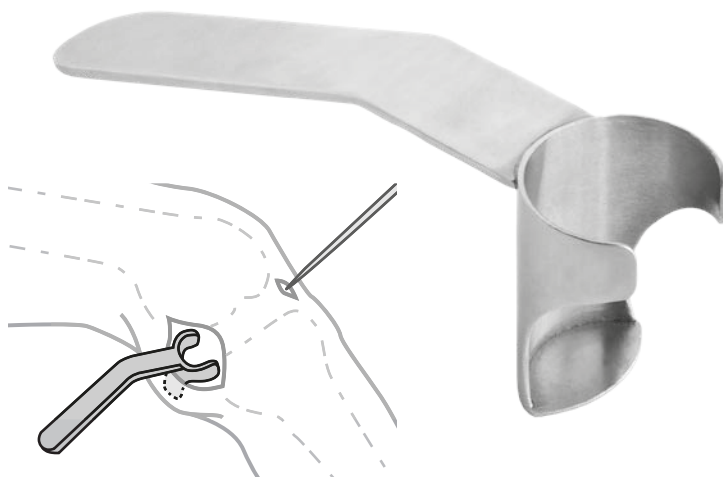

McMaster Medullary Canal Aspirator

Designed to aspirate the medullary canal prior to insertion of the solid instrumentation alignment rod to decrease the amount of semi-liquid material present

Helps evacuate excess fat and marrow content from the medullary canal of a long bone, helping to reduce the pressure and force created during insertion of a metal rod into the canal, which can possibly cause such materials to be embolized into the circulation system (and eventually into the lungs) through open venous structures.

The guide wire serves a dual purpose: To help break up the medullary bone in the proximal metaphysis to facilitate the passage of the fenestrated rod, and after the procedure to assist in cleaning and clearing the cannulated portion of the rod.

Also can be used on the tibial side if an intramedullary guide system is used. Can also be used during femoral rodding procedures for fractures.

PRODUCT NO:

8075

Overall Length: 19" (48,3 cm)

Also Available Individually:


8075-01 [Canal Tube]

Overall Length: 18" (45,7 cm)

8075-02 [Guide Wire]

Overall Length: 19" (48,3 cm)

Designed by
William McMaster, MD

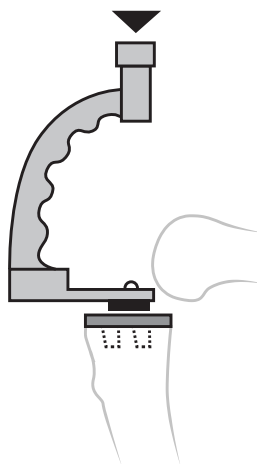

Tibial Impactor

Assists in MIS unicompartmental cemented tibial tray impaction, and can also be helpful for impaction of other components such as ankle

PRODUCT NO'S:

1129


Dimensions: 7" x 4" (17,8 cm x 10,2 cm)

Delrin Impactor Pad: 1" x .625" (2,5 cm x 1,6 cm)

Replacement Part:

1129-02 [Replacement Pad Only]

Design modified by Atul F. Kamath, MD



Pin Inserter



Used for 1/8" (3,2 mm) diameter pin insertion

Designed to hold onto a pin while it is being inserted into a cutting block during total knee surgery or other applications. Holds the pin tightly, yet releases it easily after insertion. May be used with round or triangular end pins.

PRODUCT NO:

4020

Overall Length: 5" (12,7 cm)

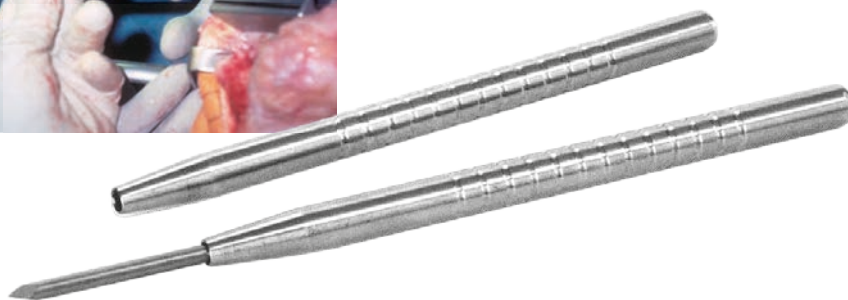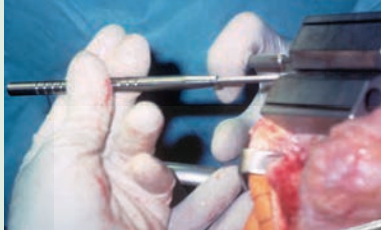

Pin Inserter/Extractor

Helps provide better leverage, stability and control when inserting/extracting pins

Completely cannulated allowing use on long pins where the instrument can be next to the bone or skin for stability and control. The grasping end is contoured to not block the surgeon's field of view. The handle is shaped so not to slide in the surgeon's hand and for better leverage. May also be used to pull a drain needle from the surgical site. The design helps to protect operating personnel from the sharp tip of the needle. A slap hammer may be screwed into a threaded pin inserter/extractor to help in removing pins in hard bone.

PRODUCT NO'S:

3020 [For 1/8" (3,2 mm) Pins]


3020-T-00 [For 1/8" (3,2 mm) Pins, w/Slaphammer and Sterilization Case]

3020-T [For 1/8" (3,2 mm) Pins, Threaded to Accept slap hammer]

3030 [For 3/16" (4,8 mm) Pins]

 3040 [Slap Hammer]
Thread: 5/16"x 18

1015 [Sterilization Case]

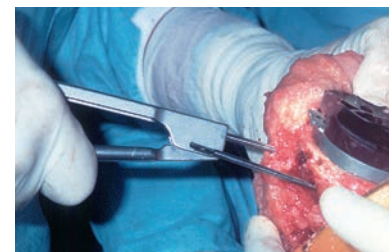

Pin Driver and Threaded Bone Pins

Quick-connect version for use with a driver.


PRODUCT NO'S:

1205 [Pin Driver]

Overall Length: 3.75" (9,5 cm)

1206 [Pin Driver w/Zimmer Hall Quick-connect]

Overall Length: 5" (12,7 cm)

1/8" (3,2 mm) Pins – Packages of 10:

1287 [85 mm Threaded Bone Pin]

1290 [65 mm Threaded Bone Pin]

1297 [55 mm Threaded Bone Pin with Collar]


PRODUCT NO:

 8248 [Fixed Driver]
with Zimmer Hall Quick-connect


Shouldered Bone Pins

Pins feature a trocar point

PRODUCT NO'S:
Packages of 10:


1270 [1/8"]

 Diameter: 3.2 mm (.125")
Overall Length: 70 mm
Shoulder-to-tip: 45 mm

1271 [1/16"]

 Diameter: 1.6 mm (.062")
Overall Length: 70 mm
Shoulder-to-tip: 45 mm

1297 [Threaded]

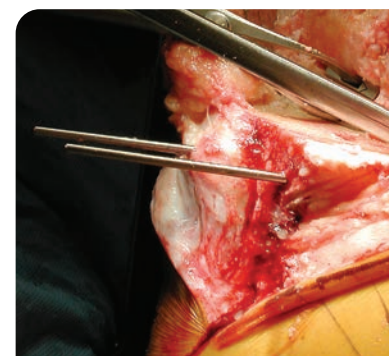 Diameter: 3.2 mm (.125")
Overall Length: 55 mm


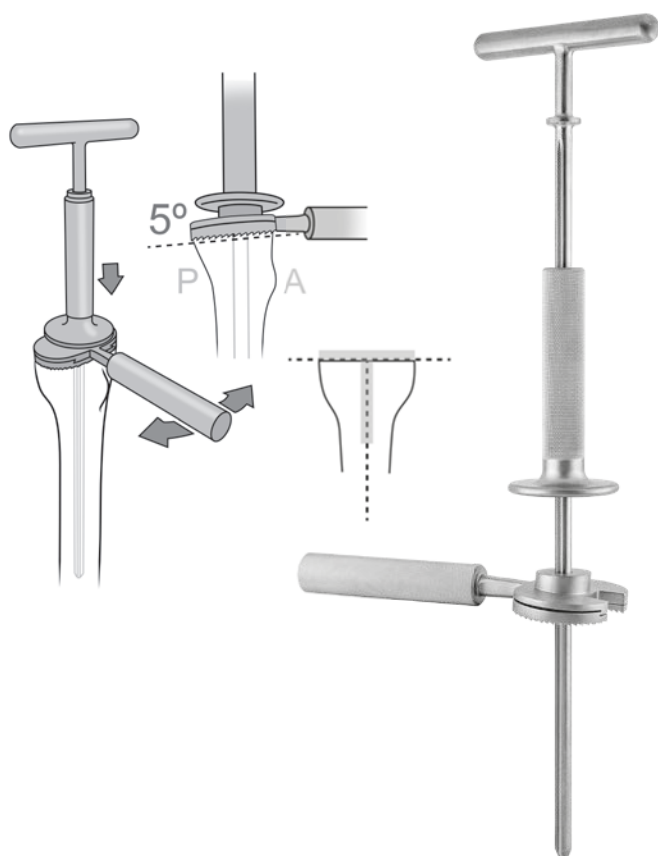


Stanton Straight Pin Removal Pliers

PRODUCT NO:

1893
Overall Length: 6.375" (16,2 cm)
Jaw Length: 1.62 (4,1 cm)
Instrument Width: 1 cm

Designed by John Stanton, MD



Colwell TKA 5° Tibial Rasp Assembly

A tibial planing tool with a universal design to help improve tibial cut alignment and flatness by smoothing out imperfections intraoperatively, helping to ensure the tibial bone surface is cut correctly in coronal and sagittal planes

After the planer rasp handle/plate unit is threaded onto the intramedullary rod, the handle is moved back and forth through an arc while the cutting surface of the planer is held against the tibial bone, to realign the cut and to remove any imperfections.

For use with any primary or revision knee system when an intramedullary cutting guide is being used.

PRODUCT NO'S:

6900-00 [Complete Assembly]
Overall Length: 15" (38,1 cm)

Set includes:


6901-01 [Rasp Handle]
Overall Length: 6.283" (16 cm)
Handle Length: 3.625" (9,2 cm)

6901-02 [Rasp Plate]
Plate Width: 2.65" (7,7 cm)
Plate Depth: 1.75" (4,3 cm)


6902 [T-Handle Canal Rod]
Overall Length: 15" (38,1 cm)
T-Handle Width: 4" (10,1 cm)

6903 [Handle Grip]
Overall Length: 4" (10,1 cm)


Designed by
Clifford W. Colwell Jr., MD

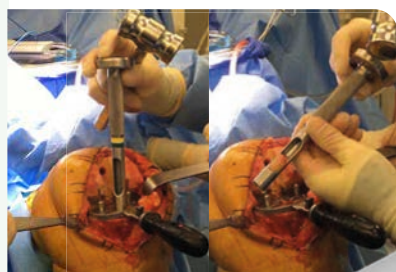

Use punch to remove tibial bone plug, then...

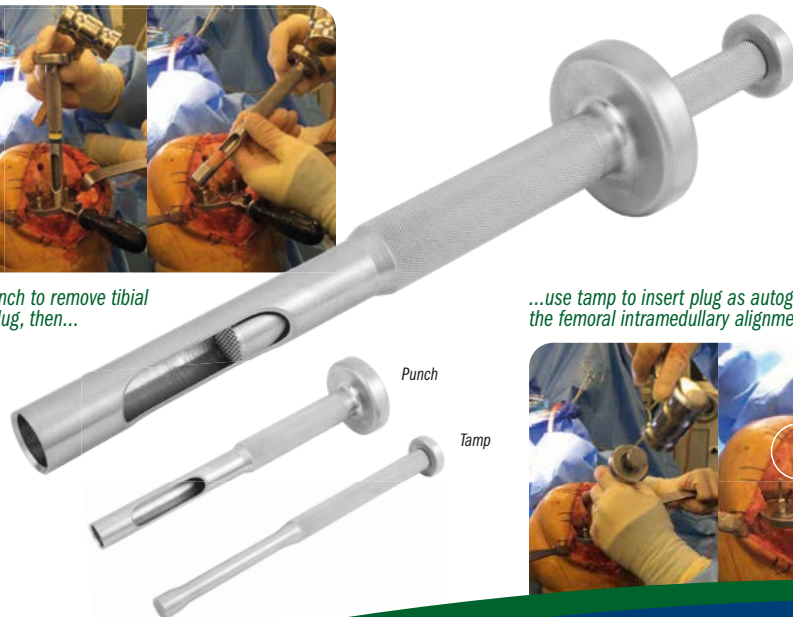

...use tamp to insert plug as autograft for the femoral intramedullary alignment hole

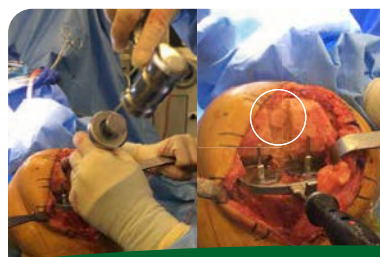

Goytia Osteotome Punch Tamp Assembly

Designed for removing a tibial bone plug to use as autograft for the femoral intramedullary alignment hole in total knee replacement

PRODUCT NO'S:

5339-00 [Punch & Tamp Set]

Set Includes / Available Individually:

5339-01 [Osteotome Punch]
Overall Length: 7.75" (19,7 cm)
Outside Diameter: 16 mm
Inside Diameter: 13.7 mm

5339-02 [Tamp]
Overall Length: 7.75" (19,7 cm)
Diameter: 12.3 mm

Designed by Robin Goytia, MD



Patella Cover Plate


Protects the cut surface of the patella during minimally invasive knee surgery

Sharp spikes help hold the plates in place. Lessens the chance of weakening the patella, as pre-drilling is not necessary.

PRODUCT NO'S:

4230-00	[Set of 4 Sizes]
4230-01	[Small] 35 mm x 31 mm
4230-02	[Medium] 36 mm x 32 mm
4230-03	[Large] 37 mm x 33 mm
4230-04	[Extra Large] 38 mm x 34 mm

Designed by
S. David Stulberg, MD

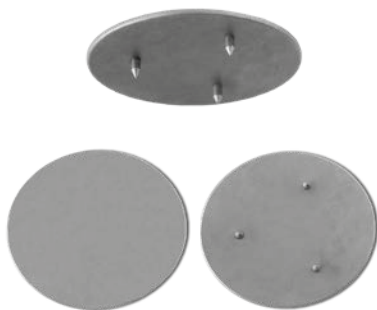

Patella Grasping Forceps

Bent handle helps the surgeon to evert the patella during minimally invasive knee surgery

Normally two forceps are used. Sold individually.

PRODUCT NO:

4250
Overall Length: 6.75" (17.1 cm)

Designed by S. David Stulberg, MD



Lombardi Tibia Cement Preparation Drill

Designed to drill cancellous bone to help improve bone/cement interface

For drilling cancellous bone in the subchondral weight bearing region of the tibia, helping to improve the mechanical interlock in the cancellous bone/cement interface. Features a Zimmer Hall quick-connect end for use with a driver.

PRODUCT NO:

1112
Drill Diameter: 2.7 mm
Drill Length: 3 mm
Overall Length: 4.75" (12.1)

Designed by Adolph Lombardi, MD



PRODUCT NO:

8248 [Fixed Driver]
with Zimmer Hall Quick-connect

Woolley Tibia Punch

Designed to impact cancellous bone to help improve bone/cement interface

Designed to impact cancellous bone in the subchondral weight bearing region of the tibia. This helps to improve the mechanical interlock in the cancellous bone/cement interface. The sharp tips can be used on normal and dense cancellous bone, and they can also be used when a significant deformity has been encountered resulting in sclerotic bone.

PRODUCT NO:

5140
Prong Depth: 5.5 mm
Overall Length: 7" (17.8 cm)
Shaft Diameter: 13 mm

Designed by D. Woolley, MD



Seymour ACL Graft Advancer

Designed to facilitate the passage and tensioning of an ACL graft into the femoral and tibial tunnels

A loop is tied in the prepared graft's passing sutures and the device is used to pull the graft into the tunnels, then to tension the fixation.

PRODUCT NO:

1117

Overall Length: 4.35" (11,1 cm)

Handle Width: 4" (10,2 cm)

Hook Width: 19,5 mm Outside, 13,5 mm Inside

Hook Depth: 25 mm

Hook Diameter: 3 mm



Designed by Scott Seymour, MD



Kodkani Tissue Elevator Suture/Graft Passer

Designed for MPFL reconstruction basket weave technique, and helpful for mini-open ligament reconstruction surgeries for graft passage

Can also be used for:

- ▶ Periosteum/soft tissue elevator or freer
- ▶ Percutaneous passage of tendon/ligament graft/suture
- ▶ Stripping tendon grafts off muscle
- ▶ General orthopedics – repiosteum elevator and spike

Advantage of the open slot:

- ▶ Convenient feeding and removal of sutures from slot
- ▶ Feeding of multiple thick sutures & sutures with knots
- ▶ Engaging and shuttling grafts with short suture loop ends

PRODUCT NO'S:

1114 [No Slot]

Overall Length: 9.75" (24,8 cm)

Handle Length: 4.25" (10,8 cm)

Suture Hole: 2,5 mm x 13 mm

1114-01 [With Slot]

Overall Length: 9.75" (24,8 cm)

Handle Length: 4.25" (10,8 cm)

Suture Hole: 2,5 mm x 13 mm

Designed by Pranjali Kodkani, MD



New!
SLOTTED VERSION

Wilson Patella Double #3 Scalpel Handle

Designed to help make a predictable incision in the patellar tendon when harvesting ACL graft material

The blade offset is 10 millimeters. The tendon graft is harvested from the patella and tibial tubercle including the patellar tendon. Uses scalpel blades that fit a #3 handle size. **Scalpel blades not included.**

PRODUCT NO:

8207

Overall Length: 5.75" (14,6 cm)



Designed by Ralph Wilson, MD



Andrews Modified Tibial Fragment Grasper

Designed to help remove tibial bone during unicondylar and total knee arthroplasty

PRODUCT NO:

1721

Overall Length: 10" (25,4 cm)

Jaw Dimensions: 1.44" x .72" (36,6 cc x 18,3 mm)

Lower Jaw Thickness: 1 mm



Designed by Scott Andrews, MD



Rosenstein Tibial Fragment Grasper for UKA

Designed to help remove the tibial bone fragment in one piece during Unicompartmental Knee Arthroplasty

The narrow grasper with its thin lower jaw is inserted under the femoral condyle, helping to secure the tibial fragment throughout its entire length, and to remove the fragment without breaking it. The angled design helps keep the surgeon's hands out of the way and facilitates visualization.

PRODUCT NO:

1720


Overall Length: 10" (25,4 cm)

Jaw Dimensions: 1.44" x .72" (36,6 mm x 18,3 mm)

Lower Jaw Thickness: .05" (1,2 mm)



Designed by Alexander D. Rosenstein, MD

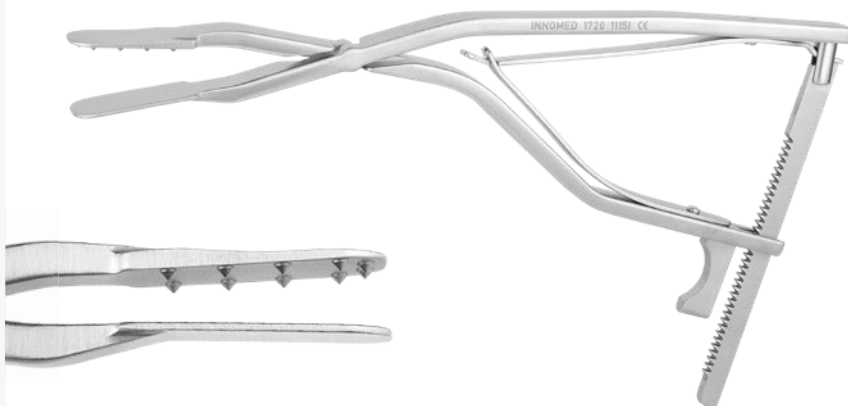

Redler Clamp with Wire Guide

Designed to hold bony fragments in place for placement of guide wires

Can be used for placement of guide wires during the open reduction and internal fixation of a patella fracture

PRODUCT NO'S:

1885-45

For Pins up to .045" (1,1 mm)

Overall Length: 9.5" (24,1 cm)

Jaw opens to: 3.5" (8,9 cm)

1885-62

For Pins up to .062" (1,6 mm)

Overall Length: 9.5" (24,1 cm)


Jaw opens to: 3.5" (8,9 cm)

Two sizes available:

For use with .045" (1,1 mm)

or .062" (1,6 mm) K-wires.

Designed by M.R. Redler, MD

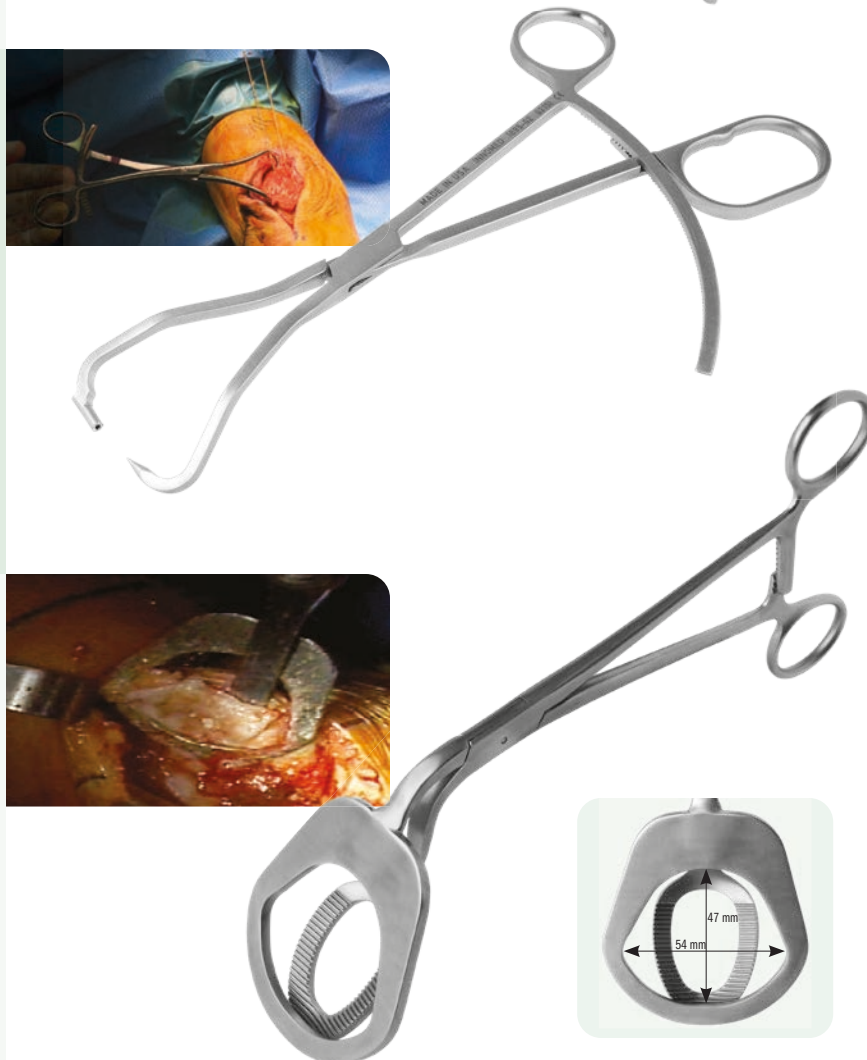

Scott Patella Resection Guide/Clamp

Helps move the tendons anteriorly, giving the surgeon a good method of holding the patella stable for resection

Can be used as a holding device, or as a guide if the surgeon uses the tendon insertion to the patella as level for resection.


PRODUCT NO:



1164

Overall Length: 10" (25,4 cm)

Designed by James Scott, MD

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY



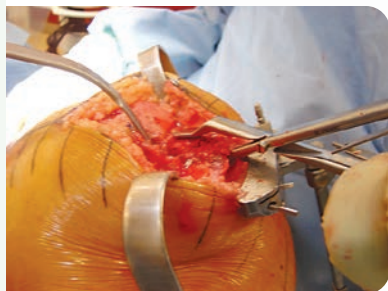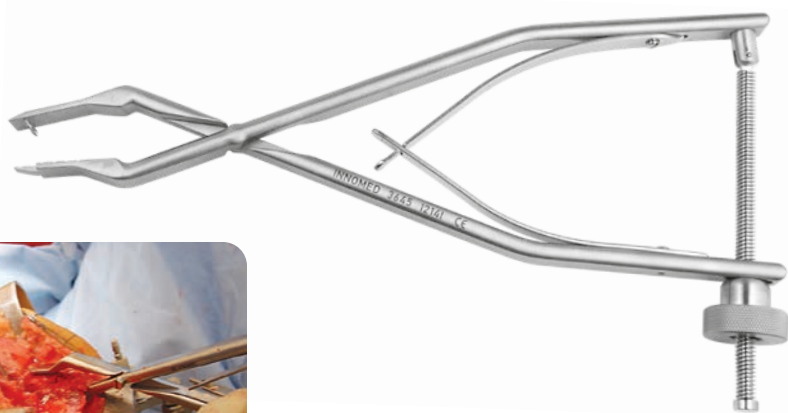

Fracchia Tibia/Patella Clamp with Speed Lock

Designed to be used to remove a tibia wedge, and helps in everting the patella

Longer spikes help with better gripping.


PRODUCT NO:

3645

Overall Length: 10" (25,4 cm)



Designed by Michael J. Fracchia, MD
& S. David Stulberg, MD

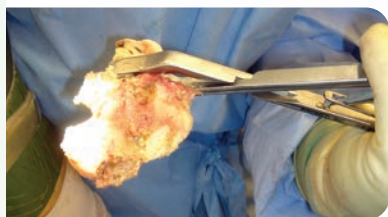

Universal Calibrated Tibia/Patella Clamp

Designed to be used to remove a tibia wedge, helps in everting the patella, and calibrations help in measuring the thickness of the patella and tibia wedges


PRODUCT NO:

3685

Overall Length: 10" (25,4 cm)

Calibrations: 0 to 26 mm

Designed by S. David Stulberg, MD

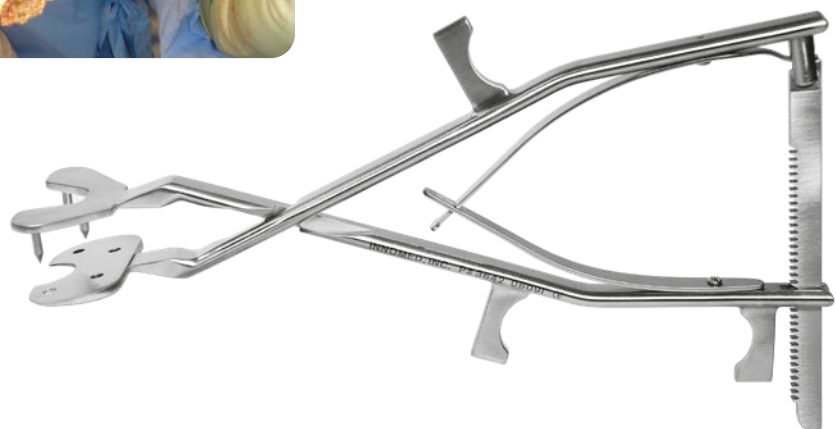

Andrews Modified Tibial Wedge Clamp

Designed to help remove the cut tibial bone quickly and easily during total knee procedures

The bone is held securely by the spikes and comes out in one piece, and also allowing for simple release of soft tissues from the bone.

PRODUCT NO:

3642

Overall Length: 10.25" (26 cm)

Pads: 60 mm x 30 mm

Front Spike Length: 14 mm

Back Spike Length: 7.5 mm

Designed by Scott Andrews, MD
and Kuldeep Sidhu, MD



Sidhu Tibia Clamp

Designed to be used to securely grasp and remove an entire tibial wedge

The tapered lower pad slides under the cut tibial wedge without first having to use wedges, then, clamping allows the spikes in the upper pad to securely grasp the entire tibial wedge for easy removal.

PRODUCT NO:

3643

Overall Length: 10.25" (26 cm)

Pads: 60 mm x 30 mm

Spike Length: 7.5 mm

Designed by Kuldeep Sidhu, MD



Mazzara Rongeur with Pistol Grip Handle

Pistol grip handle lessens hand fatigue and slippage, and allows for better visualization

PRODUCT NO'S:

1765-01

Jaw Bite: 5 x 14 mm

Overall Length: 10" (25,4 cm)

1765-02

Jaw Bite: 7 x 16 mm


Overall Length: 10" (25,4 cm)

1765-03

Jaw Bite: 10 x 16 mm

Overall Length: 10" (25,4 cm)


Designed by James T. Mazzara, MD



5 x 14 mm



7 x 16 mm



10 x 16 mm



Mazzara Rongeur with Small Pistol Grip Handle

Designed for bone and soft tissue removal in small joint surgery, the small pistol grip handle lessens hand fatigue and slippage, and allows for better visualization

PRODUCT NO'S:

1765-04

Jaw Bite: 2 x 10 mm

Overall Length: 9" (22,9 cm)

1765-05

Jaw Bite: 4 x 10 mm

Overall Length: 9" (22,9 cm)

Designed by James T. Mazzara, MD



2 x 10 mm



4 x 10 mm

New!



Ortho Rongeur with Easy Grip Handle

Offset handle lessens hand fatigue and slippage, and allows for better visualization

Offset handle gives better gripping power and helps reduce hand fatigue. Finger grooves help to prevent hand slippage. The offset handle also allows for better visualization. Available in three jaw bite sizes.

PRODUCT NO'S:

1780-01

Jaw Bite: 5 x 14 mm

Overall Length: 8.75" (22,2 cm)

1780-02


Jaw Bite: 7 x 16 mm

Overall Length: 8.75" (22,2 cm)

1780-03

Jaw Bite: 10 x 16 mm

Overall Length: 8.75" (22,2 cm)




5 x 14 mm



7 x 16 mm



10 x 16 mm

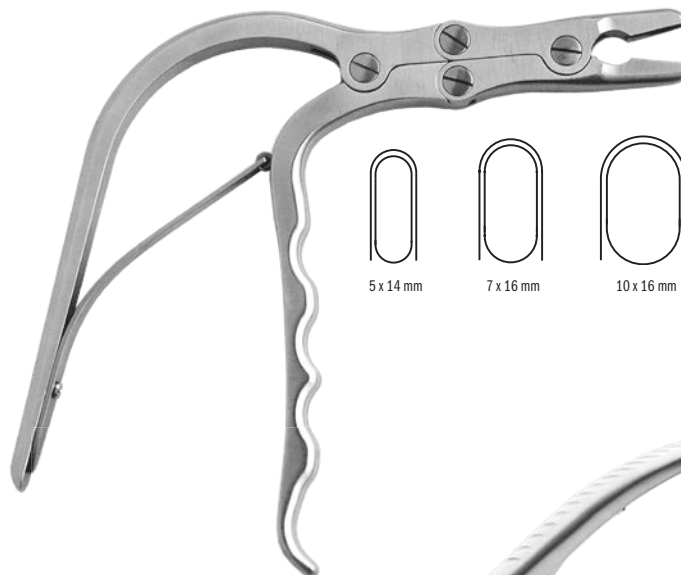

Hannum Grasper

Teeth in jaw firmly holds bone and tissue

Non-locking design can be easily gripped while allowing greater pressure to be applied. Available in three jaw sizes: short jaw for holding bone, medium jaw for smaller bones, and long jaw for tissue.

PRODUCT NO'S:

1775-01 [Short Jaw]

Jaw Width: 8 mm

Overall Length: 9.25" (23,5 cm)

1775-02 [Medium Jaw]

Jaw Width: 5 mm

Overall Length: 9.25" (23,5 cm)

1775-03 [Long Jaw]

Jaw Width: 3 mm

Overall Length: 9.25" (23,5 cm)

Designed by Scott Hannum, MD




Jaw widths at actual size




3 mm

5 mm

8 mm

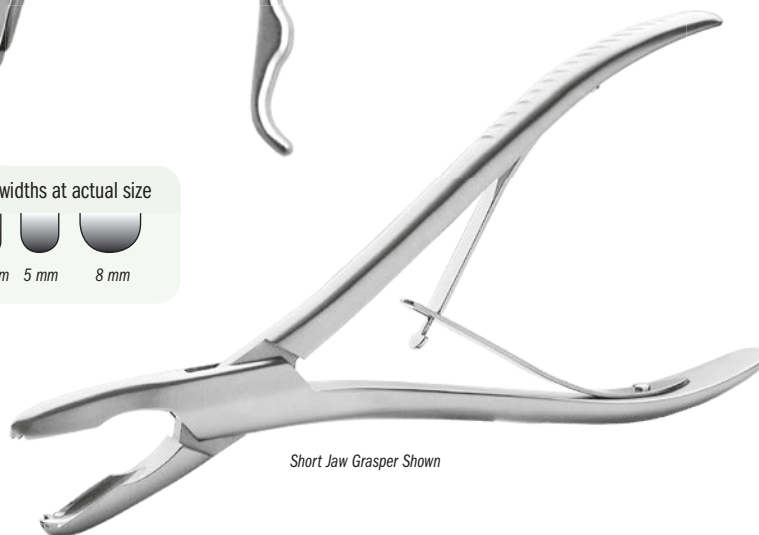

Short Jaw Grasper Shown

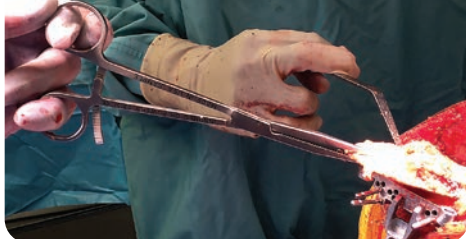

Tapered Jaw

Tapered Narrow Jaw

Square Jaw



Powers Modified Kocher Clamps

Heavier design allows for a firmer grasping of bone and soft tissues

PRODUCT NO'S:

1813 [Tapered Jaw]
Overall Length: 8.25" (21 cm)
Jaw Length: 2.5" (6,4 cm)
Jaw at End: 5.2 mm x 4.1 mm

1813-01 [Tapered Narrow Jaw]
Overall Length: 8.25" (21 cm)
Jaw Length: 2.5" (6,4 cm)
Jaw at End: 5.2 mm x 3 mm

1814 [Square Jaw]
Overall Length: 8.25" (21 cm)
Jaw Length: 2.5" (6,4 cm)
Jaw at End: 6.5 mm x 5 mm



New!

Designed by Mark Powers, MD



Lotke Double Action Cartilage Graspers

Double action strength helps to securely hold soft tissues



Angled to simulate the pinch forceps position. Ferris-Smith tips effectively hold soft tissues or needles. Powergrip avoids fatigue or excessive forces on the surgeon's thumbs.

PRODUCT NO'S:

1710 [Standard]
Overall Length: 7.5" (19,1 cm)

1715 [Ratcheted]
Overall Length: 7.5" (19,1 cm)

Designed by Paul Lotke, MD



Bhargava Modified Meniscal Clamp

Low-profile design helps facilitate grasping the posterior portion of the meniscus

Improved bite when tension is placed on the meniscus. Can also be used to help remove the fat pad and suprapatellar bursa.



PRODUCT NO:

1886
Overall Length: 7" (17,8 cm)
Jaw Length: 1.125" (2,9 cm)

Designed by Tarun Bhargava, MD



Meniscal Clamp

Redesigned clamp is curved for easier use, visualization, and tissue holding



PRODUCT NO:

1883
Overall Length: 7" (17,8 cm)
Teeth Length: .082" (2 mm)
Jaw Length: 1.5" (3,8 cm)



Sure Grip Soft Tissue Grasper

Enables the surgeon to securely grasp soft tissue structures within the knee

Incorporates a 3 mm spike into its upper jaw with a matching recess in the lower jaw, enabling the surgeon to securely grasp soft tissue structures within the knee. Particularly useful for grasping the posterior horn of either the medial or lateral meniscus. Also useful when excising the cruciate ligaments, capturing loose bodies, holding the retinaculum during patellar preparation, and grasping the capsule during wound culture.

PRODUCT NO'S:


3645-01 [5"]
Overall Length: 8" (20,3 cm)
Shaft Length: 5" (12,7 cm)
Spike Depth: 3 mm

3645-02 [7"]
Overall Length: 10" (25,4 cm)
Shaft Length: 7" (17,8 cm)
Spike Depth: 3 mm

3646-02 [7" w/Locking Ratchet]
Overall Length: 10" (25,4 cm)
Shaft Length: 7" (17,8 cm)
Spike Depth: 3 mm

3645-03 [9"]
Overall Length: 12" (30,5 cm)
Shaft Length: 9" (22,9 cm)
Spike Depth: 3 mm

Designed by
Andrew Glassman, MD

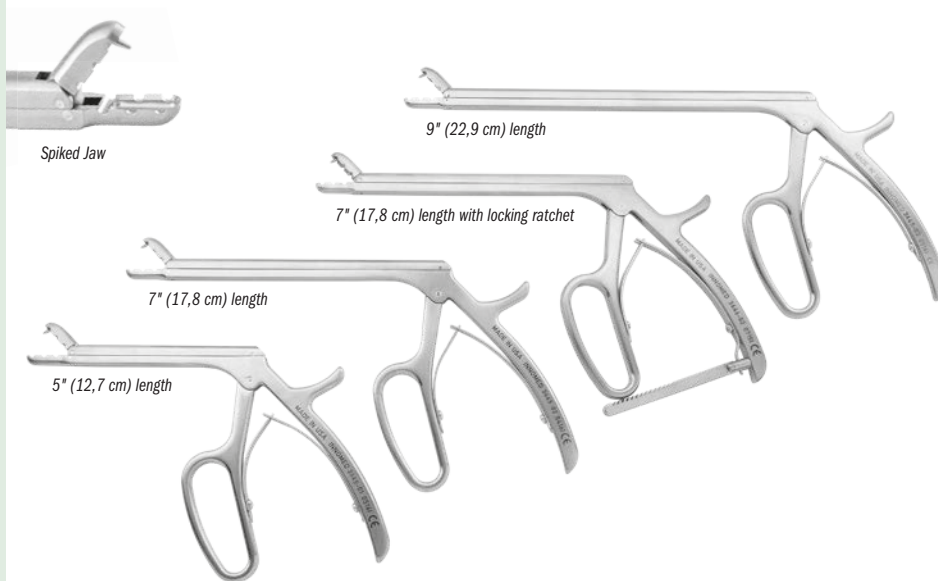

Tissue Graspers with Shark Teeth

Shark teeth help to grasp on to tissue and bone

- ▶ Shaft allows for use in narrow spaces
- ▶ Ideal for removing herniated disc material

PRODUCT NO'S:


1784-01 [Up Angled Jaw]
Shaft Length: 7" (17,8 cm)
Overall Length: 10" (25,4 cm)
Jaw: 9 mm Long x 5 mm High x 1.8 mm Wide

1784-02 [Straight Jaw]
Shaft Length: 7" (17,8 cm)
Overall Length: 10" (25,4 cm)
Jaw: 9 mm Long x 5 mm High x 1.8 mm Wide

1784-03 [Down Angled Jaw]
Shaft Length: 7" (17,8 cm)
Overall Length: 10" (25,4 cm)
Jaw: 9 mm Long x 5 mm High x 1.8 mm Wide

Designed by
Luis Ulloa

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY

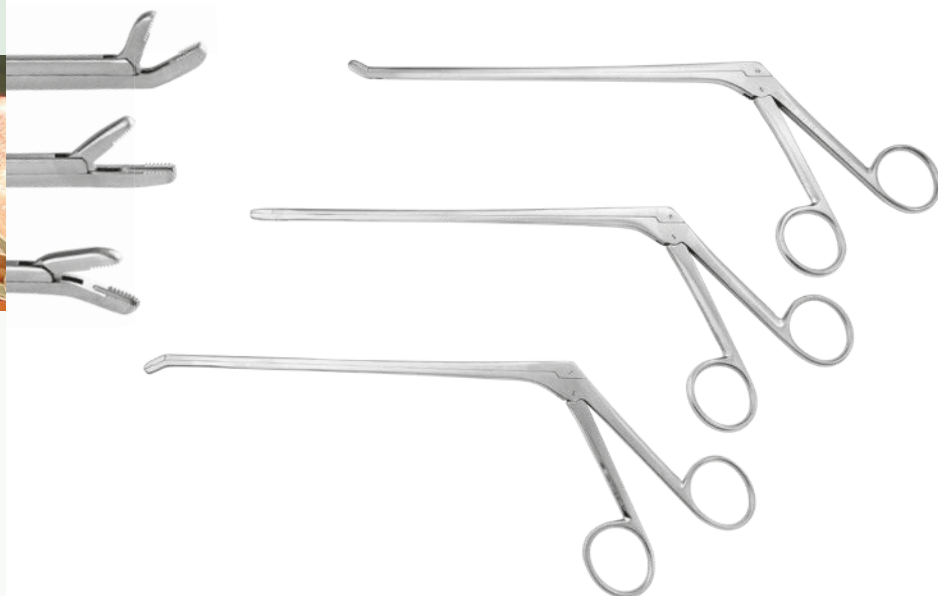

Cartilage Grasper

Helps to grasp and hold cartilage, tendons, soft tissues and loose bodies

PRODUCT NO'S:

1777 [5" with Shark Teeth]
Shaft Length: 5" (12,7 cm)
Overall Length: 8.25" (21 cm)
Jaw Bite: 2 mm x 6.5 mm


1779 [8" with Shark Teeth]
Shaft Length: 8" (20,3 cm)
Overall Length: 11.25" (28,6 cm)

1785 [Saw Teeth]
Shaft Length: 6" (15,2 cm)
Overall Length: 9.25" (23,5 cm)

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY

Designed by Luis Ulloa
Shark tooth modification by Michael Soudry, MD



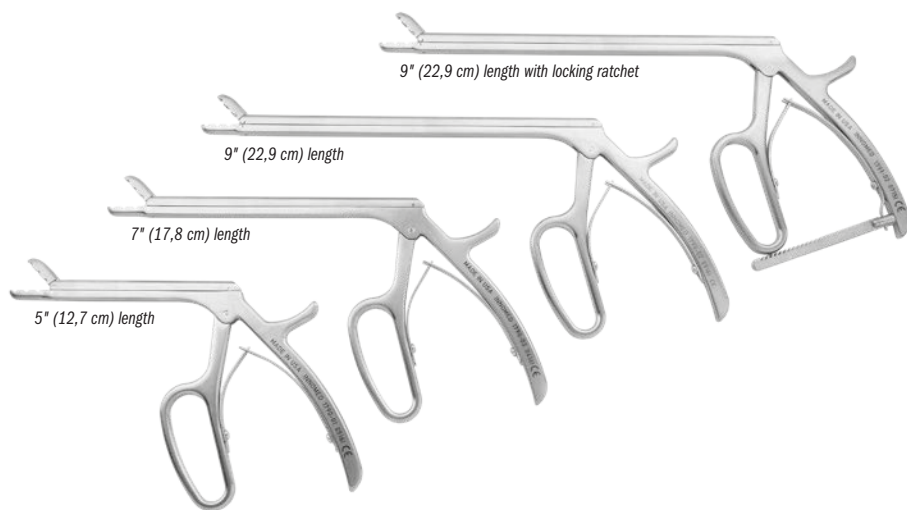

Intraarticular Tissue Grasper/Rongeur

Used to securely grasp tissue or can be used to rongeur tissue

Available in 5", 7" and 9" lengths.

PRODUCT NO'S:

1790-01 [5"]
Overall Length: 8" (20,3 cm)
Shaft Length: 5" (12,7 cm)
1790-03 [7"]
Overall Length: 10" (25,4 cm)
Shaft Length: 7" (17,8 cm)
1790-02 [9"]
Overall Length: 12" (30,5 cm)
Shaft Length: 9" (22,9 cm)
1791-02 [9" w/Locking Ratchet]
Overall Length: 12" (30,5 cm)
Shaft Length: 9" (22,9 cm)



Shark Tooth Grasper

Sharp teeth help grasp onto tissue and bone

Helpful in removing the labrum, and osteophytes around the acetabulum and around the glenoid. Also helps to remove meniscus, osteophytes and loose bodies. Helps facilitate working through a small incision without disrupting vision.

PRODUCT NO'S:

1797 [5" Shaft]
Jaw Size: 6 mm x 10 mm
Overall Length: 8" (20,3 cm)
Shaft Length: 5" (12,7 cm)
1798 [7" Shaft]
Jaw Size: 6 mm x 10 mm
Overall Length: 10" (25,4 cm)
Shaft Length: 7" (17,8 cm)
1799 [9" Shaft]
Jaw Size: 6 mm x 10 mm
Overall Length: 12" (30,5 cm)
Shaft Length: 9" (22,9 cm)
1796 [12" Shaft]
Jaw Size: 6 mm x 10 mm
Overall Length: 15" (38,1 cm)
Shaft Length: 12" (30,5 cm)

Designed by Luis Ulloa



Bhargava Grasper

Very useful in helping to remove posterior osteophytes in knee surgery, and helps to remove the labrum and soft tissues in anterior total hip surgery

PRODUCT NO:

1776
Overall Length: 12.5" (31,8 cm)
Shaft Length: 9" (22,9 cm)
Shaft Width: 7 mm
Jaw Width at End: 4 mm
Toothed Jaw Length: 14 mm

Designed by Tarun Bhargava, MD



Soudry Loose Body Grasper



Designed to help with the removal of soft tissue loose bodies in arthroscopy and open procedures

PRODUCT NO:

1769
Overall Length: 9" (22,9 cm)
Shaft Length: 6" (15,2 cm)



Designed by Michael Soudry, MD

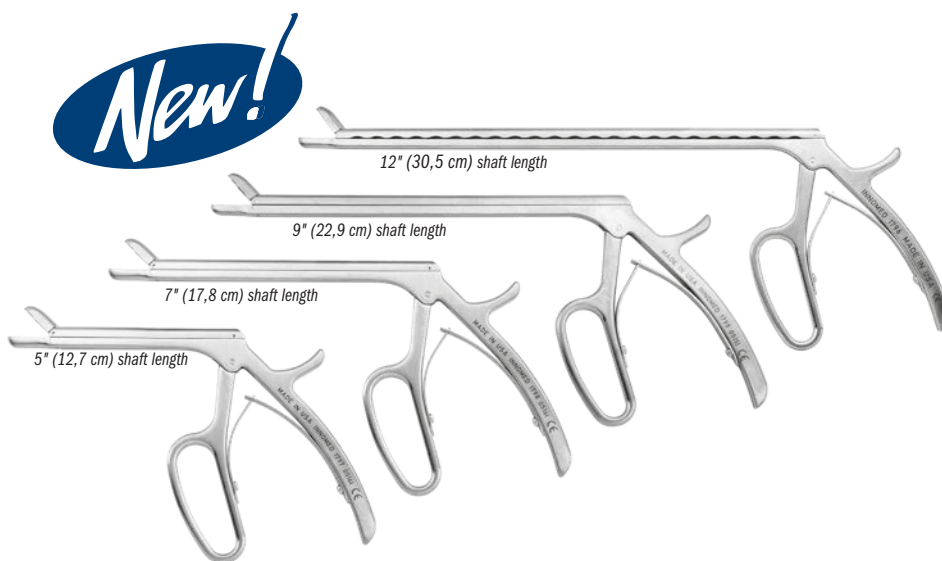

Gelbke Freer Cement Trimmer/Nerve Hook with TiN Coating

Designed to facilitate cement removal during total and partial knee replacement

- ▶ A freer elevator on one end and a nerve hook on the other
- ▶ Nerve hook accesses "tough to reach" corners of the knee
- ▶ Particularly useful for use with an ultra-congruent polyethylene insert, where trial liners are typically not used, once the final components have been placed
- ▶ Ultra hard titanium nitride coating helps to extend life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion

PRODUCT NO:

5007

Overall Length: 9.25" (23,5 cm)
Blade Width at End: 5 mm
Hook Depth: 5 mm

Designed by Martin K. Gelbke, MD



Bozeman Cement Trimmer

Combines the two most common cement trimming tools into one

The tool has a blunt blade tip on one end to help with separation of the trimmed cement. The angled curette end helps gather the trimmed cement. The thin shank and angled curette can reach into tight spaces such as the back of the implants to remove excess cement. The ends are titanium nitride coated to help eliminate metal transfer.

PRODUCT NO:

5245

Overall Length: 8.5" (21,6 cm)

Designed by Daniel M. Gannon, MD



Cement Osteotome



Helps remove cement around the back of the tibia base

Designed to be inserted around the back of the tibia base to remove cement. The curve is congruent with most tibia bases. The osteotome is nitrate coated to help protect the implant surface.

PRODUCT NO:

5220

Overall Length: 6.75" (17,1 cm)
Handle Length: 3" (7,6 cm)
Blade Width: 6,8 mm

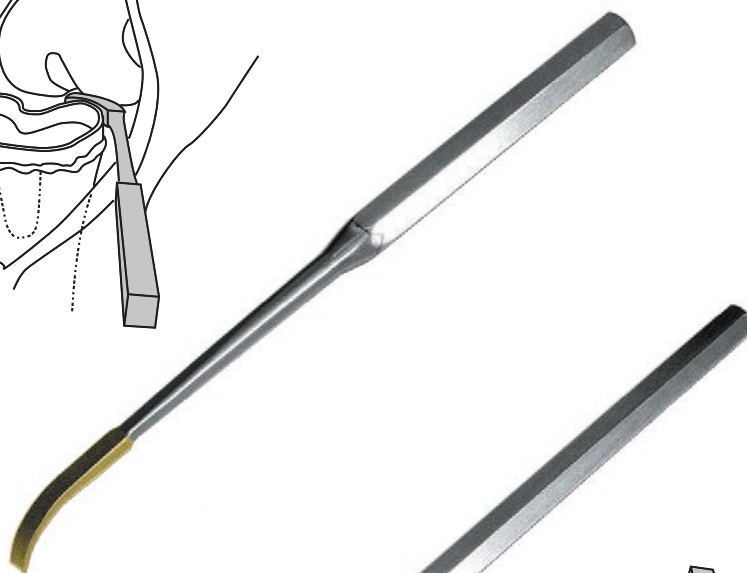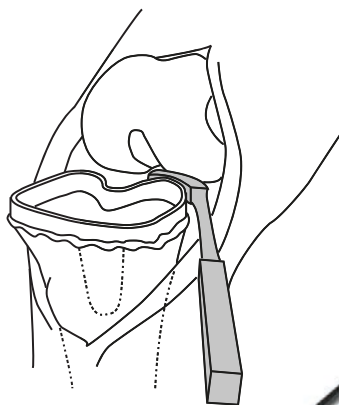

Cement Remover



Helps remove unhardened cement around femoral and tibial knee components

Designed with a sharper face to help remove unhardened cement around femoral and tibial knee components. The remover is nitrate coated to help protect implant surfaces.

PRODUCT NO:

5230

Overall Length: 7.25" (18,4 cm)
Handle Length: 5" (12,7 cm)
Blade Width: 5 mm

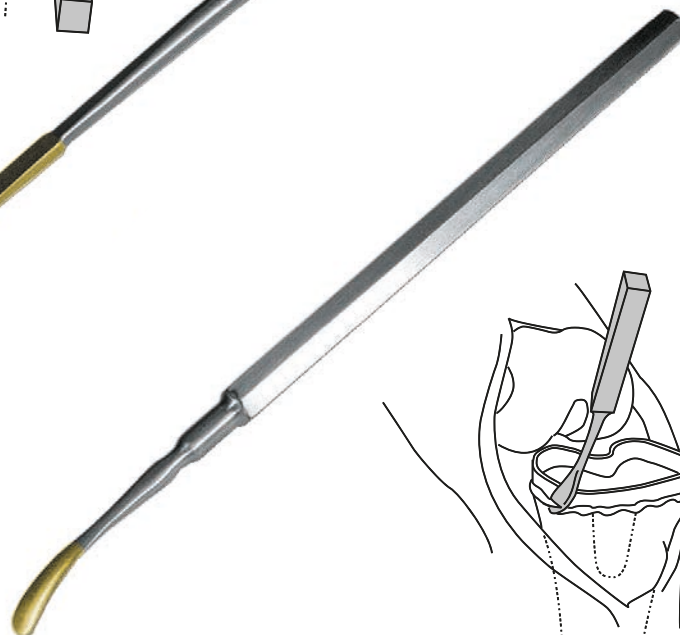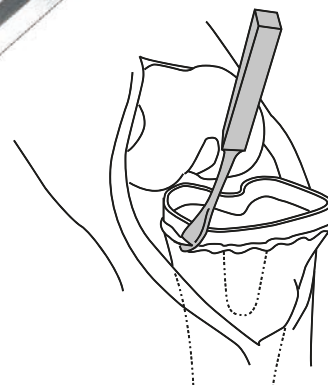



Robb Cement Curette

Designed to help remove cement around a knee or hip prosthesis

PRODUCT NO:

5635

Overall Length: 8" (20,3 cm)

Freer End: 5 mm

Cup End: 10 mm

Made of Delrin

Designed by William Robb, MD



Sarraf Spearhead Cement Exciser

Two-in-one instrument designed for cement removal during arthroplasty surgery

- ▶ Curved semicircular tip is congruent to most tibial plates and femoral condylar implants, helping to facilitate removal of excess cement, especially at the tight posterior aspect
- ▶ Spearhead tip assists in excising and shaping the unset cement
- ▶ Ultra hard titanium nitride coating helps to extend curette life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion, while helping to eliminate metal transfer and protect the implant surface

PRODUCT NO:

5211

Overall Length: 7.75" (19,7 cm)

Designed by Khaled M. Sarraf, MD



Sarraf Cement Trimmer

Two-in-one instrument designed for cement removal during arthroplasty surgery

- ▶ Curved semicircular tip is congruent to most tibial plates and femoral condylar implants, helping to facilitate removal of excess cement, especially at the tight posterior aspect
- ▶ Small scoop-end tip assists in excising unset cement
- ▶ Ultra hard titanium nitride coating helps to extend curette life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion, while helping to eliminate metal transfer and protect the implant surface

PRODUCT NO:

5212

Overall Length: 7.75" (19,7 cm)

Designed by Khaled M. Sarraf, MD



Scott Uni & Total Knee Cement Removing Curette

Sized, shaped and angled 90° to help with retrieval of posteriorly extruded cement behind the tibial component in both total and unicompartmental knee arthroplasty

Ultra hard titanium nitride coating helps to extend curette life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion, while helping to eliminate metal transfer and protect the implant surface.

PRODUCT NO:


4247

Overall Length: 9.625" (24,4 cm)

Overall Length: 5.25" (13,3 cm)

Cup Size: 4/0

Designed by Richard D. Scott, MD

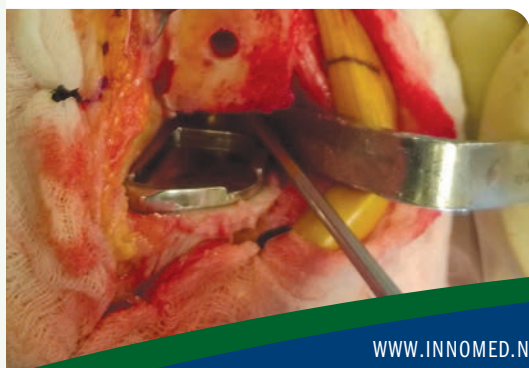

Bacastow Femoral Cement Osteotome

Uniquely shaped osteotome designed to help trim away cement from around a femoral knee component

PRODUCT NO:

5234


Overall Length: 9.25" (23,5 cm)

Width: 6,5 mm

Tongue Length: 7 mm



Designed by David Bacastow, MD

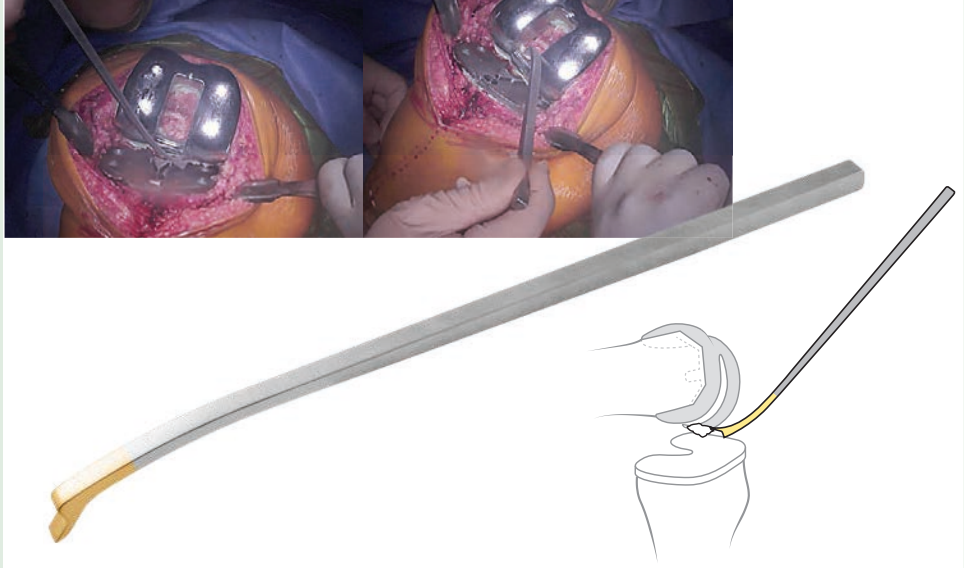

Seachris Delrin Cement Scraper

Reusable delrin scraper is designed to help remove cement around a knee or hip prosthesis


PRODUCT NO:

5218

Overall Length: 5" (12,7 cm)

Thickness: 1/8" (3,1 mm)

Designed by Timothy Seachris

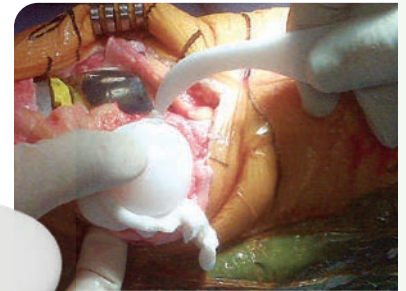

Sarraff TiN Coated Cement Forceps

Ultra hard titanium nitride coating helps to extend forceps life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion, while helping to eliminate metal transfer and protect the implant surface.

PRODUCT NO'S:

5039 [Straight]

Overall Length: 6" (15,2 cm)

5041 [Angled]

Overall Length: 6.125" (15,6 cm)

Designed by Khaled M. Sarraf, MD



Nordt Precision Micro Fracture Set

- Helps create sharp cartilage shoulders
- Precise microfracture points

PRODUCT NO'S:

8025-00 [Complete Set w/Case]

Also available individually:

8025-01 [20° Bent Awl]

Overall Length: 10" (25,4 cm)

8025-02 [40° Bent Awl]

Overall Length: 10" (25,4 cm)

8025-03 [Angled Osteotome]

Overall Length: 10.875" (27,6 cm)

8025-04 [Bent Stirrup Scraper]

Overall Length: 10.125" (25,7 cm)

8025-05 [Tri-Tip Awl]

Overall Length: 10" (25,4 cm)

8025-CASE [Case]

Designed by
William E. Nordt, III, MD



Wilson Condylar Gauge

Designed to measure the posterior femoral condyle after the posterior cuts have been made in total knee arthroplasty

By measuring the depth of the residual condyle, the surgeon can resect excessive bone and measure the bone remaining to avoid impingement of the condyle against the tibial component which could impair knee flexion. The gauge is applied to the inferior or posterior cut surface of the femoral condyle, and the back to front residual bone is measured and then removed as needed. Measures to 30 mm.

PRODUCT NO:
1194

Overall Length: 6" (15,2 cm)
Width: .568" (14,4 mm)

Designed by Ralph Wilson, MD



Merchant Surgical Goniometer

Designed to help assess frontal plane limb alignment or measure the Q angle

The extended length can reach from the center of the knee to the femoral head or the anterior superior iliac spine. The collapsible stainless steel device is autoclavable.

PRODUCT NO:
2029

Overall Length: 41" Fully Extended (104,2 cm)
22.5" Folded in Half (57,2 cm)
12" Fully Collapsed (30,5 cm)

Designed by Alan Merchant, MD



Ortho Caliper

PRODUCT NO:
5285

Caliper: 0 to 12 cm
Leg Depth: 2" (5,1 cm)
Width: 8 mm
Overall Length: 6" (15,2 cm)
Length Expands to: 10.5" (26,7 cm)

Designed by Odell Woods





Tibia AccuAngle

Designed to be placed on the tibia cutting block to check if the cut is level

Magnetic base helps to hold the AccuAngle in place on a cutting block. May also be used on top of the tibia after cut has been made. A pin may be inserted in the holes to provide a visual reference of the cut's slope.

PRODUCT NO:
1145


Dimensions:
2"x 3" (5,1 cm x 7,6 cm)

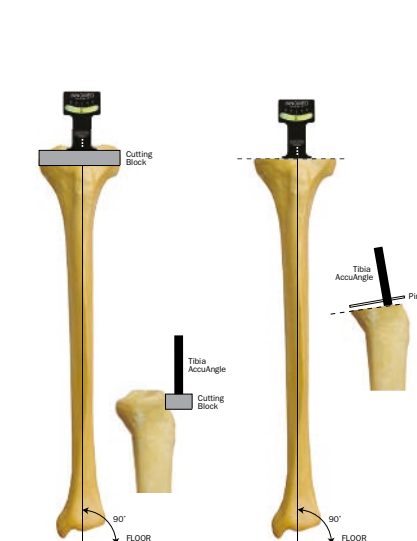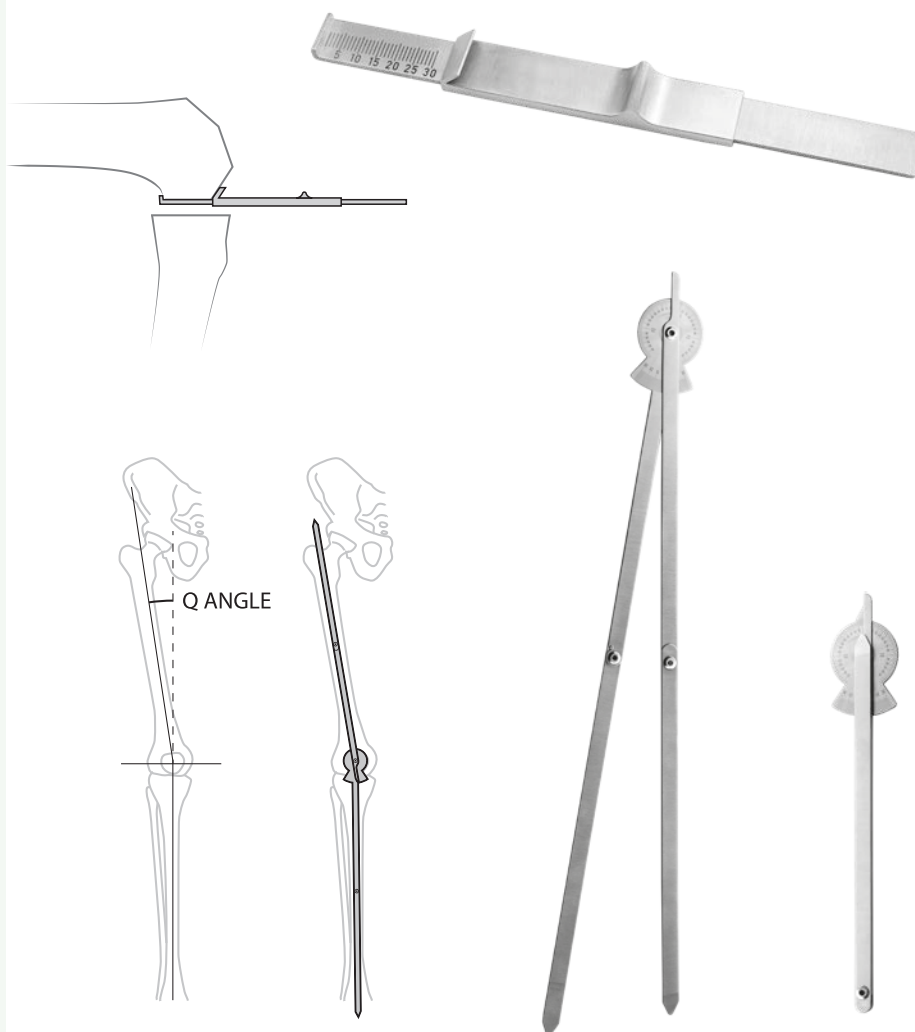

Nicholson Headrest

Helps provide excellent support when positioning the patient for all types of shoulder surgery in the beachchair position

Designed to provide excellent exposure to the shoulder, the headrest can be used with standard OR tables (with no modifications to the table). The headrest provides patient support and helps position the patient for all types of shoulder surgery—arthroscopic and open—in the beachchair position. It can be quickly placed and adjusted.



PRODUCT NO'S:

2450 [Headrest]
Main Plate Dimensions: 6" x 18" (15,2 cm x 45,7 cm)
Neck Offset Adjustment: 8" (20,3 cm)





Includes:

2450-S [Strap with gel pad]
4150-PD2 [Set of 2 Small Pads]

Designed by Gregory Nicholson, MD



A gel pad forehead strap with velcro is included for optional use.

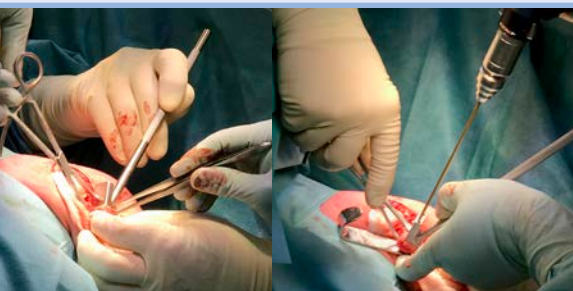

Meyer Latarjet Drill Guide & Forceps Assembly

Aiming device for flush positioning of a bone block with a joint surface

PRODUCT NO'S:

SMALL SET

5257-00 [Small Set]

Set Includes:

5257-01 [Latarjet Forceps, Small]
Overall Length: 5.875" (14,9 cm)
Tongue and Clamp Arm Width: .22" (5,6 mm)

5257-02 [Latarjet Drill Guide, Small]
Overall Length: 8.5" (21,6 cm)
Drill Hole Diameter: 3.5 mm
Distance between Drill Holes: .390" (9,9 mm)

1025 [Case]

LARGE SET


5258-00 [Large Set]

Set Includes:

5258-01 [Latarjet Forceps, Large]
Overall Length: 5.875" (14,9 cm)
Tongue and Clamp Arm Width: .32" (8,15 mm)

5258-02 [Latarjet Drill Guide, Large]
Overall Length: 8.5" (21,6 cm)
Drill Hole Diameter: 3.5 mm
Distance between Drill Holes: .492" (12,5 mm)

1025 [Case]



Distance between Drill Holes:
Small = .390" (9,9 mm)
Large = .492" (12,5 mm)

New!
SMALLER SIZE AVAILABLE



Designed by Professor Dominik Meyer

INNOMED

Right Angled Subscapular Spreader – Blunt Tips


Designed to hold the subscapularis muscle open when performing a subscapularis split approach to the glenoid

PRODUCT NO:

1652

Overall Length: 7.5" (19,1 cm)
Blade Depth: 2" (5,1 cm)

Designed by Edward McFarland, MD

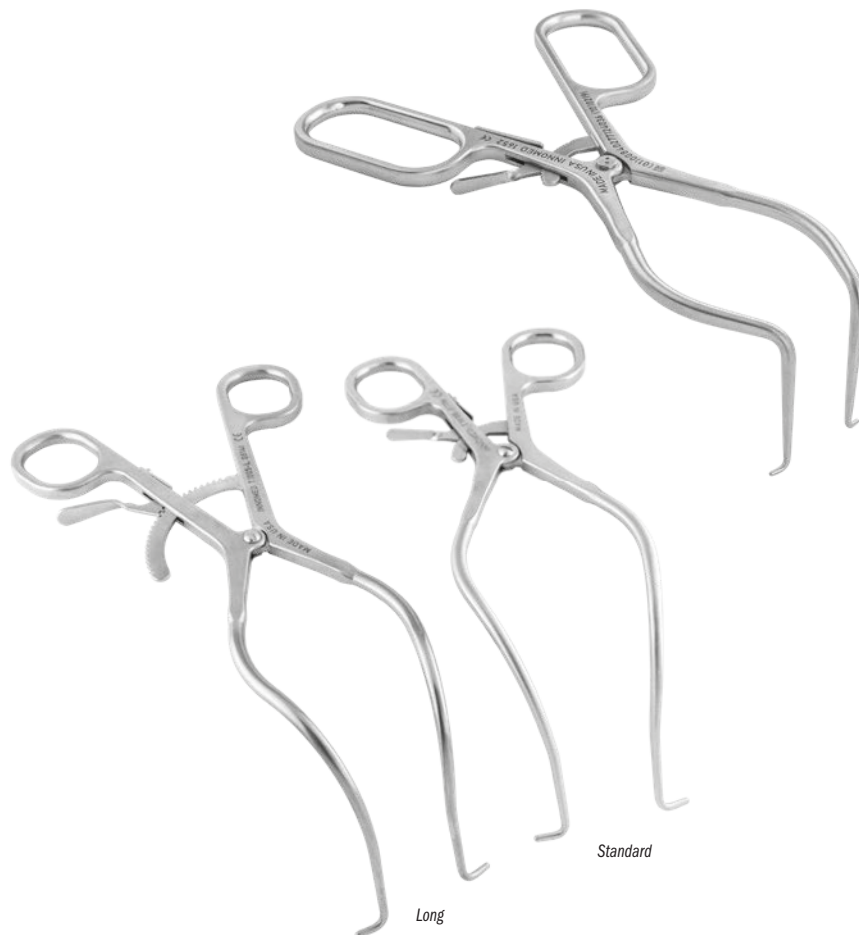

Subscapularis Spreader

Reaches deep to help split the subscapularis in a Jobe approach

Also used for retracting a split deltoid in mini rotator cuff repairs.

PRODUCT NO:

T1005 [Standard]

Overall Length: 8.375" (21,3 cm)

T1005-L [Long]

Overall Length: 9.25" (23,5 cm)



Havens Modified Kolbel Soft Tissue Retractor

Designed for retraction on deltoid split incisions on mini-open rotator cuff repairs

Jaws and arms are parallel with no gap when closed to allow easier insertion in tight spaces.

PRODUCT NO:

T1006-02

Overall Length: 7.5" (19,1 cm)

Opens To: 4.5" (11,4 cm)

Prong Depth: 18 mm



Designed by Philip Havens, MD

Kolbel Soft Tissue Retractors

Helps in the early phase to retract soft tissue comprising of the gleno-humeral joint

Use facilitates the introduction of deeper retractors which are required for sufficient visibility of the glenoid, acromion and rotator cuff.

PRODUCT NO'S:

T1006 [Standard]


Overall Length: 8" (20,3 cm)

T1006-01 [Deep]

Overall Length: 7.5" (19,1 cm)

T1006-L [Long]

Overall Length: 8.5" (21,6 cm)

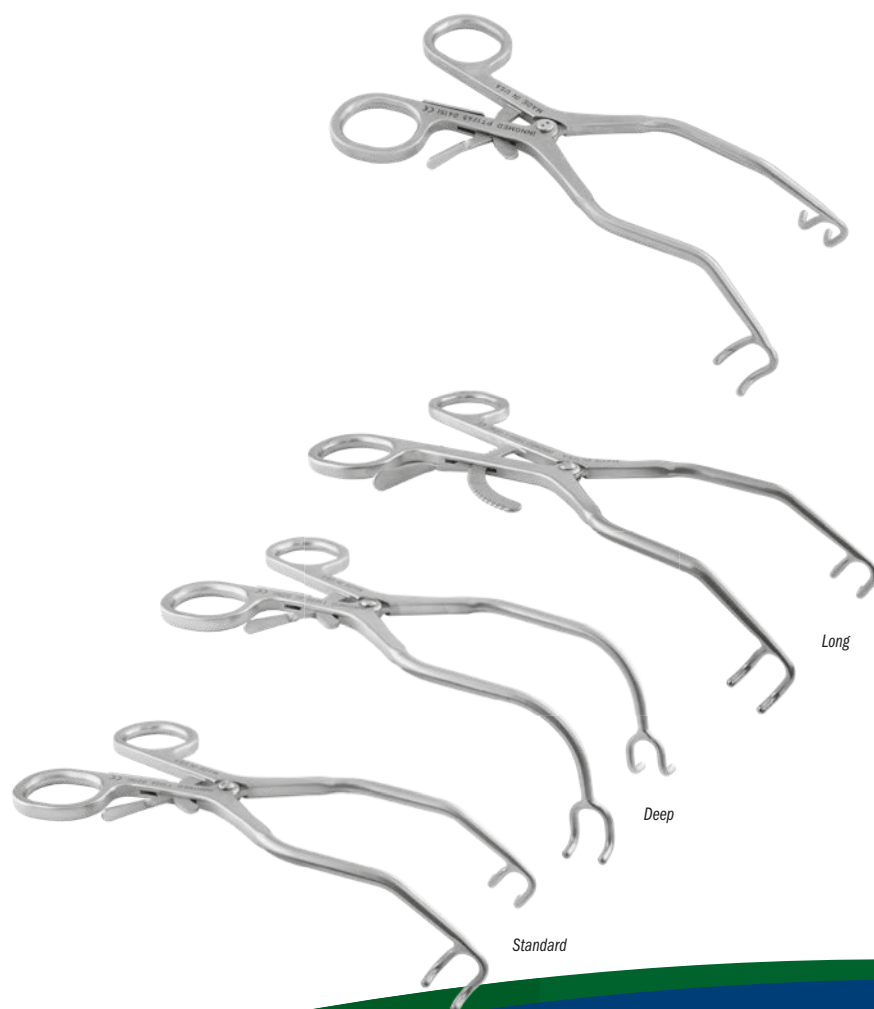

Modified Kolbel Self-Retaining Glenoid Retractor with Hinge

Two pairs of snap-in, freely pivoting blades included.

PRODUCT NO'S:

T1014-01 [Set – Standard Handle]

T1014-01-2F [Set – Ergonomic Handle]

Set Includes:

T1015-01 [Retractor – Standard Handle]

Overall Length: 8.25" (21 cm)

Length-to-hinge: 6" (15,2 cm)

Arm Length: 2.25 (5,7 cm)

– OR –

T1015-01-2F [Retractor – Ergonomic Handle]

Overall Length: 9.25" (23,5 cm)


Length-to-hinge: 7" (17,8 cm)

Arm Length: 2.25 (5,7 cm)

T1018-P [Blades–Pair] 36 mm X 36 mm

T1019-P [Blades–Pair] 36 mm X 53 mm

Standard Handle

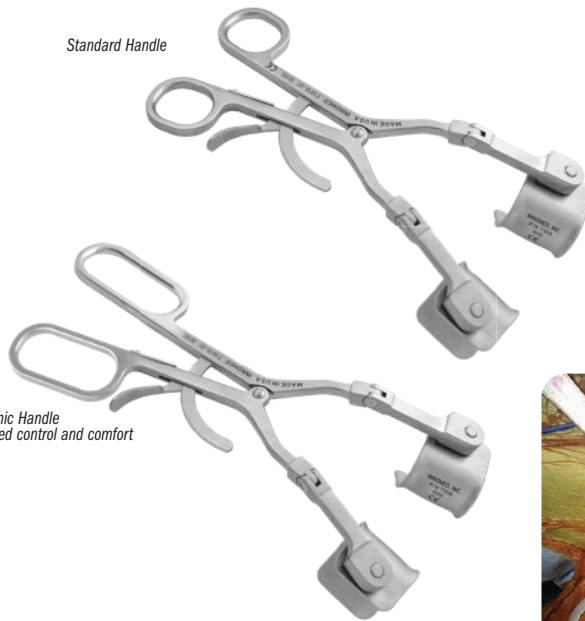

Ergonomic Handle
For added control and comfort



Kolbel Self-Retaining Glenoid Retractor

Two pairs of snap-in, freely pivoting blades included.

PRODUCT NO'S:

T1014 [Set – Standard Handle]

T1014-2F [Set – Ergonomic Handle]

Set Includes:

T1015 [Retractor – Standard Handle]

Overall Length: 8.25" (21 cm)

– OR –


T1015-2F [Retractor – Ergonomic Handle]

Overall Length: 9.25" (23,5 cm)


T1018-P [Blades–Pair] 36 mm X 36 mm

T1019-P [Blades–Pair] 36 mm X 53 mm

Standard Handle

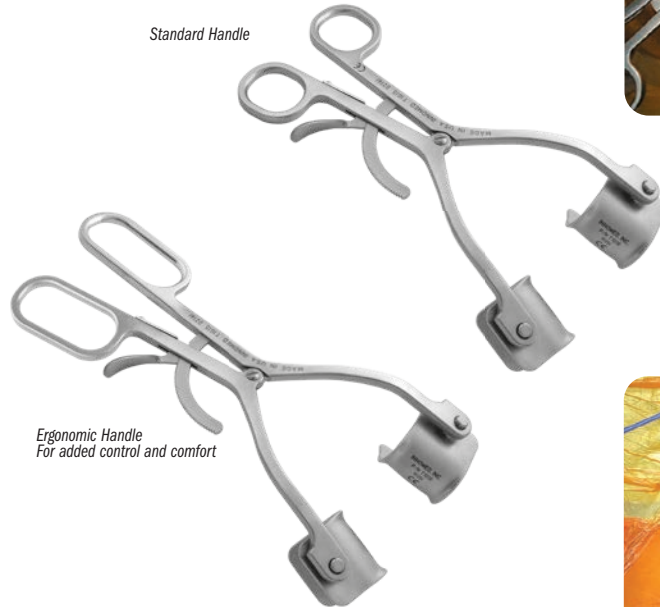

Ergonomic Handle
For added control and comfort

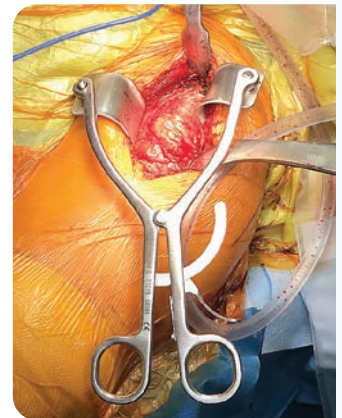

Kolbel Self-Retaining Glenoid Retractor with Center Blade

Center blade can be reversed for shallow or deep retraction

Two pairs of snap-in, freely pivoting blades included.

PRODUCT NO'S:

T1050 [Set – Standard Handle]

T1050-2F [Set – Ergonomic Handle]

Set Includes:

T1050-01 [Retractor – Standard Handle]

Overall Length: 8" (20,3 cm)

– OR –

T1050-01-2F [Retractor – Ergonomic Handle]

Overall Length: 9" (22,9 cm)

T1050-02 [Center Blade]

Length-to-bend: 6.25" (15,9 cm)

Depth: 2.5" (6,4 cm)

T1018-P [Blades–Pair] 36 mm X 36 mm

T1019-P [Blades–Pair] 36 mm X 53 mm

Standard Handle



Ergonomic Handle
For added control and comfort



Kolbel Self-Retaining Glenoid Retractor with Hinge and Ergonomic Handle

Designed with longer articulating arms—helpful for use with larger patients

Two pairs of snap-in, freely pivoting blades included.

PRODUCT NO'S:

T1016-01 [Set]

Set Includes:

T1016-01-2F [Retractor]

Overall Length: 10.75" (27,3 cm)

Length-to-hinge: 7.75" (19,7 cm)

Arm Length: 3" (7,6 cm)

T1018-P [Blades—Pair] 36 mm X 36 mm

T1019-P [Blades—Pair] 36 mm X 53 mm



Kolbel Self-Retaining Retractor

Two pairs of snap-in, freely pivoting blades included.

PRODUCT NO'S:

T1016 [Set]

Set Includes:

T1017 [Retractor]

Overall Length: 8.25" (21 cm)

Arm Length: 6.125" (15,6 cm)


Arm Length-to-hinge: 3" (7,6 cm)

T1018-P [Blades—Pair] 36 mm X 36 mm

T1019-P [Blades—Pair] 36 mm X 53 mm



**Radiolucent
Blades
Now Available!**

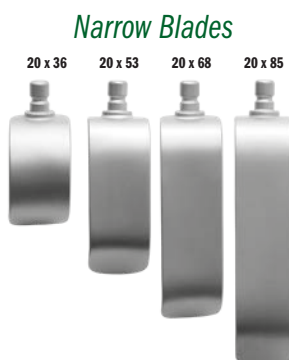

Kolbel Self-Retaining Retractor Blades

The OrthoLucent™ carbon fiber PEEK blade is strong, lightweight, completely radiolucent, can be steam sterilized, and also helps to prevent from marring component surfaces.

PRODUCT NO'S:

Wide Blades

T1018 [36 x 36 mm]

T1019 [36 x 53 mm]

T1020 [36 x 68 mm]

T1021 [36 x 85 mm]

Radiolucent Blade

T1019-R* [36 x 53 mm]



* MADE EXCLUSIVELY
FOR INNOMED IN
SWITZERLAND

Narrow Blades

T1022 [20 x 36 mm]

T1023 [20 x 53 mm]

T1024 [20 x 68 mm]

T1025 [20 x 85 mm]

Durham Offset Kolbel Shoulder Retractor Set

Designed for retraction of the deltoid and under the short head of the biceps muscle to expose the shoulder, the longer offset blades are useful in patients with large muscles, and the shorter offset blades are useful in smaller elderly patients

Snap-in, freely pivoting smooth curved blades help to concentrate the forces on the center of the muscle bellies, allowing the retractor to remain centered and not get in the way of exposure.

PRODUCT NO'S:

T1030 [Set]

Set includes: (1) T1030-01, (2) T1030-L, (2) T1030-S

Also available individually:

T1030-01 [Retractor Handle]

Overall Length: 7" (17,8 cm)

T1030-L [Long Offset Blade]

(2) included in set, (1) only with this product number

Offset Length: 35 mm

Blade Dimensions: 36 x 36 mm

T1030-S [Short Offset Blade]

(2) included in set, (1) only with this product number

Offset Length: 10 mm

Blade Dimensions: 36 x 36 mm

Designed by Alfred A. Durham, MD



36 x 36 mm
10 mm Offset



36 x 36 mm
35 mm Offset



Durham Offset Zelpi Retractor

Staggered depth retractor designed for exposure during total hip and total shoulder surgery

- ▶ In hip surgery, with the handle towards the surgeon, the longer leg is on the inside.
- ▶ In shoulder surgery, with the handle downward, the longer leg is on the outside.
- ▶ The longer leg extends 1.1" (2,8 cm) deeper.

PRODUCT NO'S:

1573-L [Left]

Overall Length: 8.5" (21,6 cm)


Leg Depths: 3.1" & 4.2" (7,9 cm & 10,7 cm)

1573-R [Right]

Overall Length: 8.5" (21,6 cm)

Leg Depths: 3.1" & 4.2" (7,9 cm & 10,7 cm)

Designed by
Alfred Durham, MD

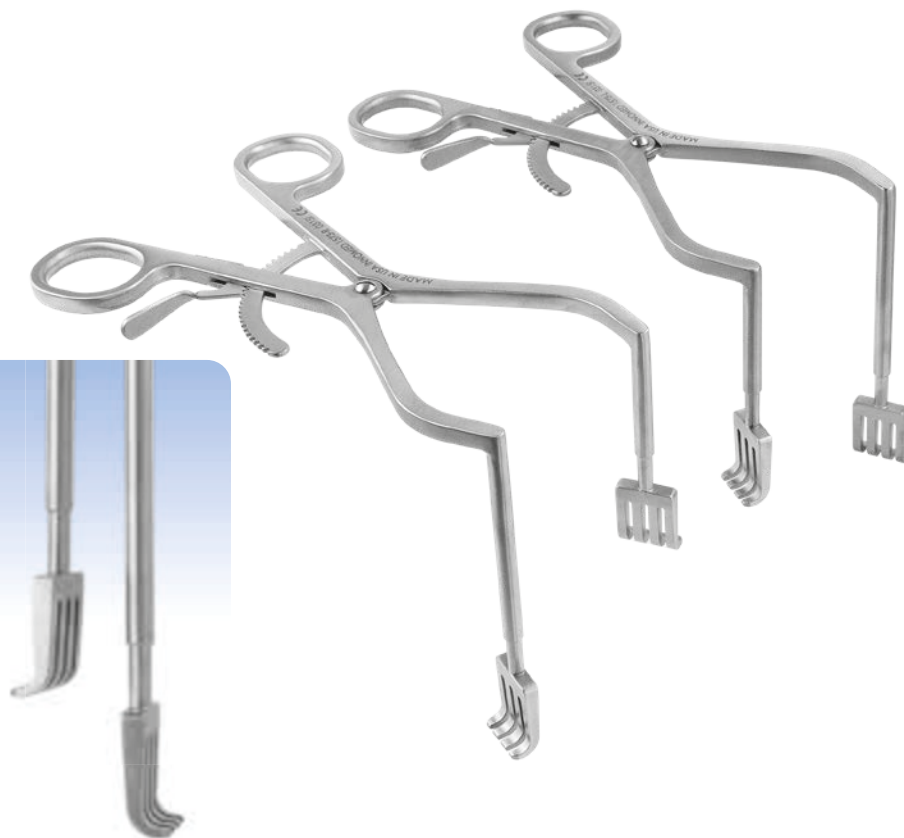

Hendren Self-Retaining Retractor

Gentle on tissue and very effective in holding back subcutaneous fat

Also useful for retracting the deltoid muscle firmly.

PRODUCT NO:

1745

Overall Length: 5.5" (14 cm)

Blade Size: 18 mm x 13 mm

Designed by D.H. Hendren, MD

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY



Bacastow Shoulder Capsular Retractor

Designed to help place tension on the inferior capsule for improved visualization and dissection when performing anatomic or reverse shoulder replacement

Rotating arms allow left or right use.

PRODUCT NO:

5185

Overall Length: 8" (20,3 cm)
Length to Pivot: 5.75" (14,6 cm)
Small Blade Depth: 1" (2,54 cm)
Wide Blade Depth: 2" (5,1 cm)

Designed by
David Bacastow, MD



New!

Gerber Sub-Acromion Spreaders

Designed to gain optimal access to the subacromion space

MADE EXCLUSIVELY
FOR INNOVIMED IN
GERMANY

Designed to gain optimal access to the subacromion space by distracting inferiorly the humeral head from the acromion.

PRODUCT NO'S:

Standard

1640-01 [Right]
Blade Length: 19 mm
Inside Ring Dia.: 32 mm
Overall Length: 7" (17,8 cm)

1640-02 [Left]
Blade Length: 19 mm
Inside Ring Dia.: 32 mm
Overall Length: 7" (17,8 cm)


Modified

1641-01 [Right]
Blade Length: 34 mm
Inside Ring Dia.: 25 mm
Overall Length: 7" (17,8 cm)

1641-02 [Left]
Blade Length: 34 mm
Inside Ring Dia.: 25 mm
Overall Length: 7" (17,8 cm)


Left

Right

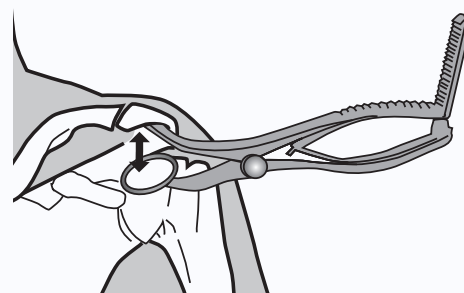

Agrawal Talon Retractor

Designed to help facilitate glenoid exposure in total shoulder arthroplasty

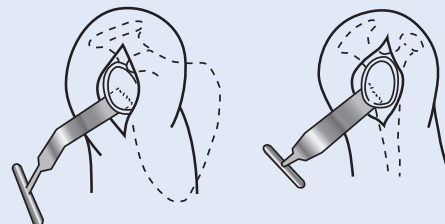

PRODUCT NO:

4695

Overall Length: 7.875" (20 cm)
Blade Width: 41 mm

Designed by Vivek Agrawal, MD



Modified Winged Fukuda Retractor

Designed with flared edges for less pressure on soft tissues

PRODUCT NO:

1896

Overall Length: 7.5 (19,1 cm)

Blade Width: 36 mm

Opening: 29 x 40 mm

Designed by Scot Rheinecker, PA



Modified Fukuda-type Retractor with Reamer Slot

Center cutout slot allows the shaft of a reamer to fit more posteriorly

Used to retract the humeral shaft posteriorly and help expose the entire glenoid surface.

PRODUCT NO'S:

1898 [Narrow]

Overall Length: 7.25" (18,4 cm)

Blade Width: 32 mm

Opening: 25 x 40 mm

1899 [Wide]

Overall Length: 7.25" (18,4 cm)

Blade Width: 38 mm

Opening: 32 x 40 mm

Designed by Richard J. Miller, MD



Half Ring Fukuda-type Retractor

Modified fukuda designed to improve glenoid access and labral removal during arthroplasty

Can be shifted medial-lateral or superior-inferior to facilitate posterior labral removal and relieve reamer impingement.

PRODUCT NO:

5168

Overall Length: 7.25" (18,4 cm)

Blade Width: 1.25" (32,5 cm)

Blade End Gap: .675" (17,1 cm)


Designed by Brett Sanders, MD



Disposable LED Light Source



PRODUCT NO'S:
PACKAGE OF 1:
8010-01 [Disposable LED Light Source] Overall Length: 2.5" (6,4 cm) Diameter: 1" (2,54 cm)
PACKAGE OF 10:
8010-10 [Disposable LED Light Source]

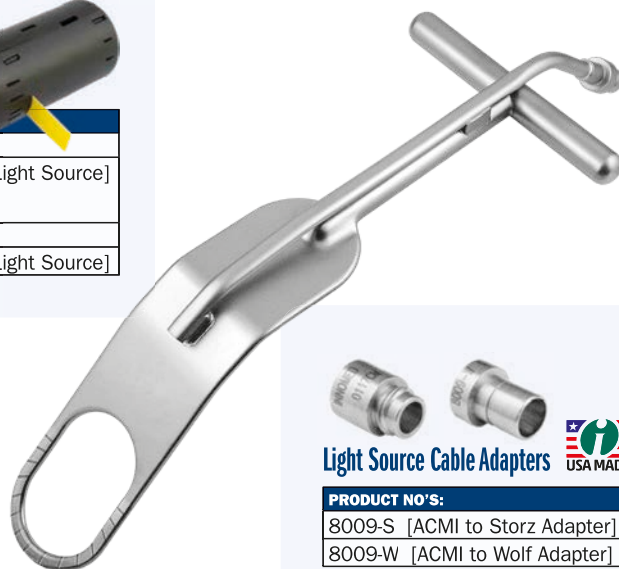

Light Source Cable Adapters



PRODUCT NO'S:
8009-S [ACMI to Storz Adapter]
8009-W [ACMI to Wolf Adapter]

Lighted Fukuda-type Retractors

Used to retract the humeral shaft posteriorly and helping to expose the entire glenoid surface, the lighting attachment helps provide enhanced visual exposure

Comes with one (1) Disposable LED Light Source (#8010-01). Can also be attached to a fiber optic light cable with ACMI (female) connector. Retractors can be steam sterilized.

PRODUCT NO'S:
1930-L-01 [Lighted Narrow] Blade Width: 32 mm Opening: 25 x 40 mm Overall Length: 8.75" (22,2 cm)
1940-L-01 [Lighted Wide] Blade Width: 38 mm Opening: 32 x 40 mm Overall Length: 8.75" (22,2 cm)

Designed by Evan Flatow, MD
& Louis Bigliani, MD



Evans Modified Fukuda-type Retractors

Designed to retract the humeral shaft posteriorly, helping to expose the glenoid surface

Center groove allows a reamer shaft to fit more posteriorly.

PRODUCT NO'S:
5180-N [Narrow] Overall Length: 8.625" (21,9 cm) Blade Width: 1" (25,4 mm) Blade Depth: 3.75" (9,5 cm)
5180-W [Wide] Overall Length: 8.625" (21,9 cm) Blade Width: 1.25" (31,7 mm) Blade Depth: 3.75" (9,5 cm)

Designed by
Peter J. Evans, MD



Modified Fukuda-type Retractors

Used to retract the humeral shaft posteriorly and helping to expose the entire glenoid surface

PRODUCT NO'S:
1930 [Narrow] Blade Width: 32 mm Opening: 25 x 40 mm Overall Length: 7.25" (18,4 cm)
1940 [Wide] Blade Width: 38 mm Opening: 32 x 40 mm Overall Length: 7.25" (18,4 cm)

Designed by Evan Flatow, MD
& Louis Bigliani, MD



Humeral Head Depressor

Used to help expose the glenoid fossa

Placed over the humeral head and hooked around the posterior lip of the glenoid rim, to expose the glenoid fossa for total shoulder reconstruction and reconstructive stabilization procedures done through a standard delto-pectoral approach.


PRODUCT NO:

1520

Overall Length: 8" (20,3 cm)



Designed by William J. Mallon, MD

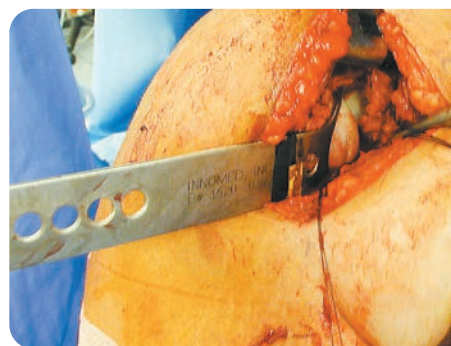

Bolanos Shoulder Retractor

Designed for mini-open rotator cuff repairs and shoulder arthroplasty, the contour matches the humeral head and the rounded edge helps avoid trauma to surrounding musculature

Depth matches girth of most patients, while the comfortable handle makes it easier for assistants to hold.

PRODUCT NO:

3222

Overall Length: 7.5" (19,1 cm)

Blade Width at Widest: 1" (2,54 cm)

Designed by Alberto Bolanos, MD



Chandler Retractors

Used for retracting tissue away from the bone

Allows the surgeon to retract soft tissue away from bone, and can be used for hip and knee surgery. The handle is contoured away from the field of view and working area. Available in three blade sizes: 5/8", 3/4" and 1".

The OrthoLucent™ version is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

PRODUCT NO'S:

3220-01 [5/8" (16 mm)]

Overall Length: 9.125" (23,5 cm)

Blade Width: 16 mm

3220-02 [3/4" (19 mm)]

Overall Length: 9.125" (23,5 cm)

Blade Width: 19 mm

3220-04 [1" (25,4 mm)]

Overall Length: 9.125" (23,5 cm)

Blade Width: 25,4 mm

3220-02R [OrthoLucent™

3/4" (19 mm)]

Overall Length: 9.125" (23,5 cm)

Blade Width: 19 mm



*
MADE EXCLUSIVELY
FOR INNOVEMED IN
SWITZERLAND



Evans Reverse Hohmann Retractor

Designed for total shoulder arthroplasty and open rotator cuff procedures

Smaller size useful for retracting the deltoid muscle and other structures.

PRODUCT NO:

4547

Blade Width: Tapers from 30 mm to 18 mm


Blade Depth: 3" (7,6 cm)

Prong Width: 6 mm

Overall Length: 8.5" (21,6 cm)

Designed by
Peter J. Evans, MD



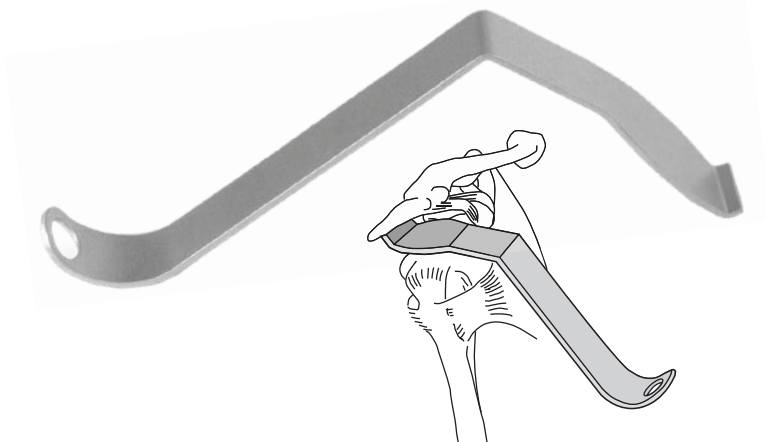

Kirschenbaum Acromioplasty Retractor

Helps to protect both the posterior aspect of the shoulder and the articular surface of the humeral head during open acromioplasty and rotator cuff surgery

Designed to fit under the posterior edge of the acromion and lever the humeral head down out of the way.

PRODUCT NO:
5840

Overall Length: 9.25" (23,5 cm)
Blade Width at Tip: 21 mm

Designed by Ira Kirschenbaum, MD




Levy Anterior Glenoid Retractor

Designed to help alleviate tension on anterior glenoid structures and the handle is designed to optionally be clamped to the drape

PRODUCT NO:
4536

Overall Length: 10.5" (26,7 cm)
Depth from Bend: 5.875" (14,9 cm)
Blade Width: .75" (1,9 cm)
Tooth Gap: .325" (8,2 mm)

Designed by Jonathan Levy, MD

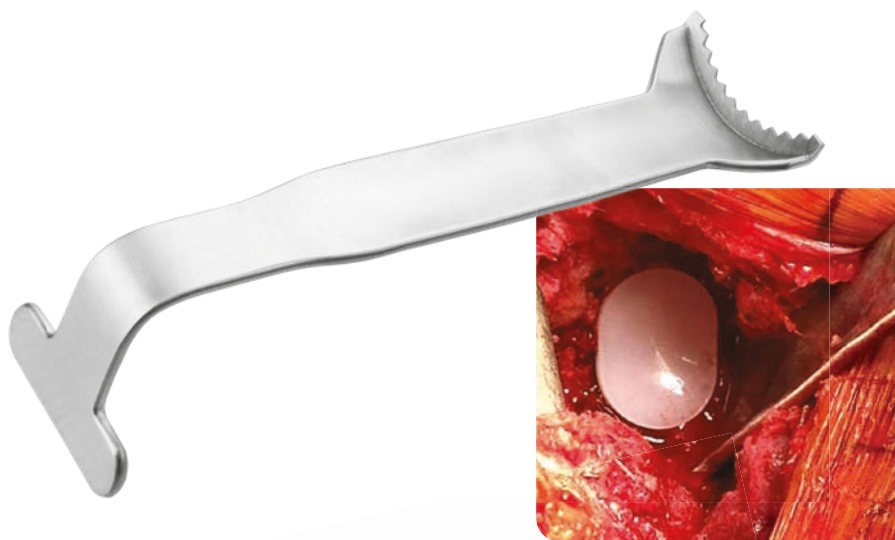

George Semi-Circumferential Glenoid Retractor

Designed to depress the humeral head and retract tissue away from the posterior half of the glenoid, helping to improve exposure for the preparation and placement of the glenoid component in total shoulder arthroplasty

PRODUCT NO:
2435

Overall Length: 8" (20,3 cm)
Blade Width: 2.125" (5,4 cm)

Designed by Michael S. George, MD



Acromioplasty Retractor


Designed to retract and protect the humeral head during resection of the inferior acromial surface

The two prongs hook the posterior aspect of the acromion for retraction. The file is used to smooth rough edges of the acromion post-resection.

PRODUCT NO:
S3008

Overall Length: 9" (22,9 cm)
Blade Width: 18 mm



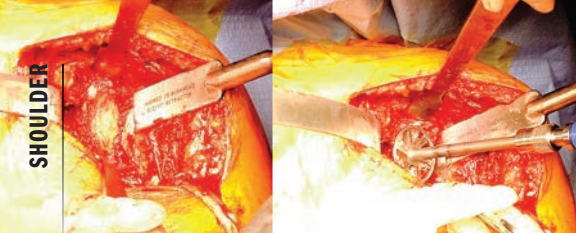

Burkhead Glenoid Retractor

The retractor bar presses against the glenoid while the end of the retractor puts pressure on the posterior capsule

PRODUCT NO'S:

5839 [Large]

Overall Length: 9.125" (23,2 cm)


Blade Width at End: 1.5" (3,8 cm)

5839-SM [Small]

Overall Length: 8.75" (22,2 cm)

Blade Width at End: 1" (2,54 cm)

Designed by Wayne Burkhead, MD

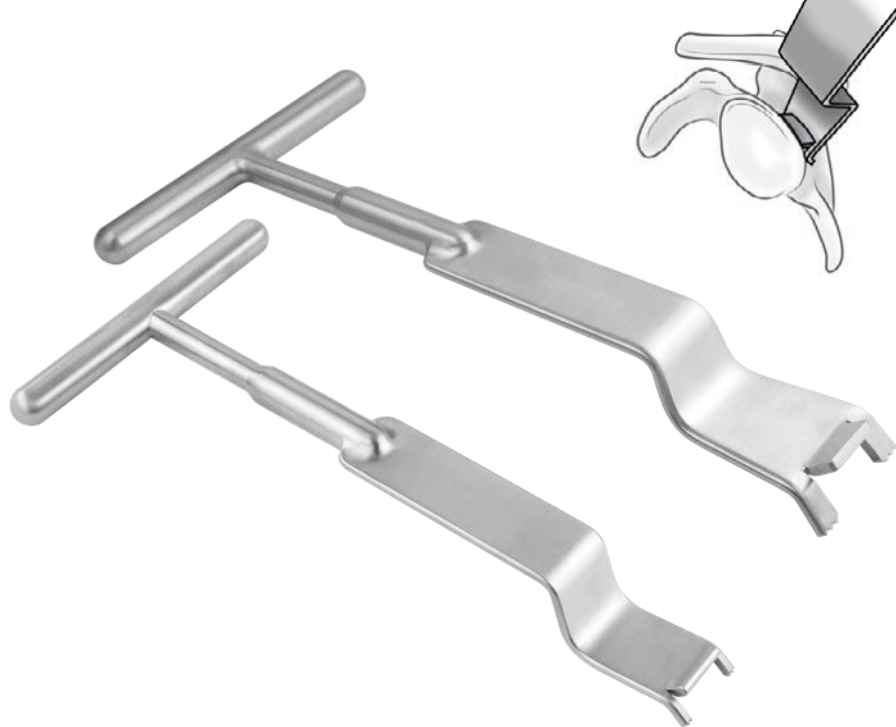

Burkhead Reversible TSA/RSA Retractor

Unique shape, angles and double pronged end serves to push the posterior capsule, and the humerus, away from the glenoid to allow preparation of the glenoid and implantation of component(s) without having to remove the retractor


PRODUCT NO:

5839-01

Overall Length: 9.125" (23,2 cm)

Blade Width at End: 1.5" (3,8 cm)

Designed by
Wayne "Buzz" Burkhead, Jr, MD

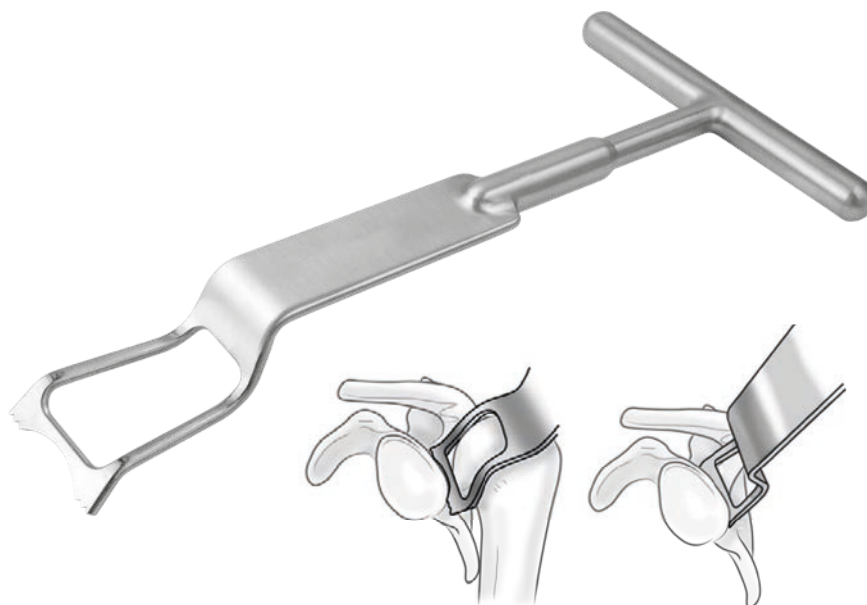

Bacastow Glenoid Retractors

Designed for glenoid exposure, particularly for reverse shoulder replacement applications, where it is important to get inferiorly

Allows visualization and direct access to the glenosphere base plate through a deltopectoral incision with intact pectoralis major insertion.

PRODUCT NO'S:

1897-L [Left]

Overall Length: 11.75" (29,8 cm)

1897-R [Right]

Overall Length: 11.75" (29,8 cm)

Designed by David Bacastow, MD





Modified Thin Glenoid
Retractor–Narrow & Wide



Right Angle Hohmann Retractor



Modified Fukuda Retractor



Brown Deltoid/Richardson
Retractor–Large & Small



Modified Darrach Retractor,
Straight–Narrow & Wide



Modified Darrach Retractor,
Bent–Narrow & Wide



Soft Tissue Shoulder Retractor



Glenoid Access Retractor

New!

Shoulder Surgery Retractor System

System includes two of each size of the Modified Thin Glenoid Retractors, and one of each of the other retractors.

PRODUCT NO'S:

1251-00 [Complete System]

Included in Set/Available Individually:

1252-N [Modified Thin Glenoid Retractor–Narrow]

Two included in set; one with this product number
Overall Length: 11.875" (30,2 cm)
Blade Width: 15 mm

1252-W [Modified Thin Glenoid Retractor–Wide]

Two included in set; one with this product number
Overall Length: 11.875" (30,2 cm)
Blade Width: 23 mm

1253 [Right Angle Hohmann Retractor]

Overall Length: 8.125" (20,6 cm)
Depth from Bend: 4.25" (10,8 cm)
Blade Width: 16 mm

1254 [Modified Fukuda Retractor]

Overall Length: 8.625" (21,9 cm)
Depth: 2.75" (7 cm)
Blade Width: 39 mm

1255-L [Brown Deltoid/Richardson
Retractor–Large]

Overall Length: 10.5" (26,7 cm)
Depth: 2.5" (6,4 cm)
Blade Width: 60 mm

1255-S [Brown Deltoid/Richardson
Retractor–Small]

Overall Length: 10.5" (26,7 cm)
Depth: 2.5" (6,4 cm)
Blade Width: 44 mm

1256 [Modified Darrach Retractor,
Straight–Narrow]

Overall Length: 10.25" (26 cm)
Blade Width: 12,7 mm

1257 [Modified Darrach Retractor,
Straight–Wide]

Overall Length: 10.25" (26 cm)
Blade Width: 19 mm

1258 [Modified Darrach Retractor, Bent–Narrow]

Overall Length: 10.75" (27,3 cm)
Blade Width: 12,7 mm

1259 [Modified Darrach Retractor, Bent–Wide]

Overall Length: 10.75" (27,3 cm)
Blade Width: 19 mm

1260 [Soft Tissue Shoulder Retractor]

Overall Length: 10" (25,4 cm)
Depth from Bend: 3" (7,6 cm)
Blade Width: 19 mm

1261 [Glenoid Access Retractor]

Overall Length: 13.5" (34,3 cm)
Access Hole Internal Diameter: 36 mm X 30 mm
Depth of Prongs: 8.5 mm

New!

Developed in collaboration with Mayo Clinic.



Gunther Glenoid Retractor

Ergonomic design helps to retract the humeral head posteriorly during glenoid exposure while avoiding reamer contact during shoulder replacement surgery

PRODUCT NO:

1999

Overall Length: 11" (27,9 cm)
Neck Width: .625" (15,9 mm)
Prong Outside Width: 1" (25,4 mm)
Prong Inside Width: .625" (15,9 mm)

Designed by
Stephen B. Gunther, MD



Modified Darrach-type Bent Elevator

Designed for difficult glenoid exposure, the elevator is placed around the posterior glenoid rim, retracting the cut humeral surface

PRODUCT NO:

1966

Overall Length: 10" (25,4 cm)
Blade Depth: 5" (12,7 cm)
Blade Width: 1" (2,54 cm)

Designed modification by R.L. Stowell, MD
of original design by Evan Flatow, MD



Glenosphere Component Retractor

Designed for use in total and reverse shoulder arthroplasty

Coated version helps to protect component surfaces.

PRODUCT NO:

5841 [Coated End]

Overall Length: 10.25" (26,7 cm)
Blade Width: .9375" (2,4 cm)


5841-01 [Uncoated End]

Overall Length: 10.25" (26,7 cm)
Blade Width: .9375" (2,4 cm)

Designed by Tim Seachris




New!

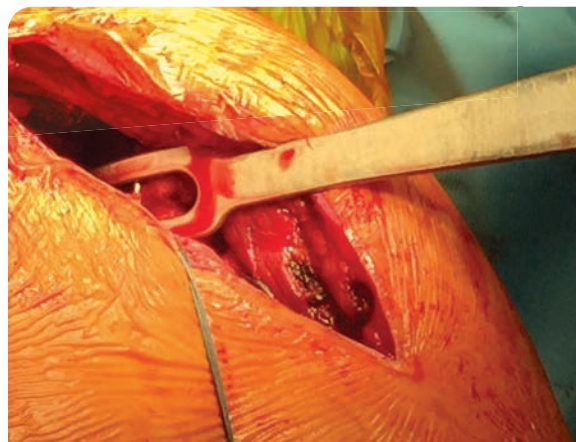



New!

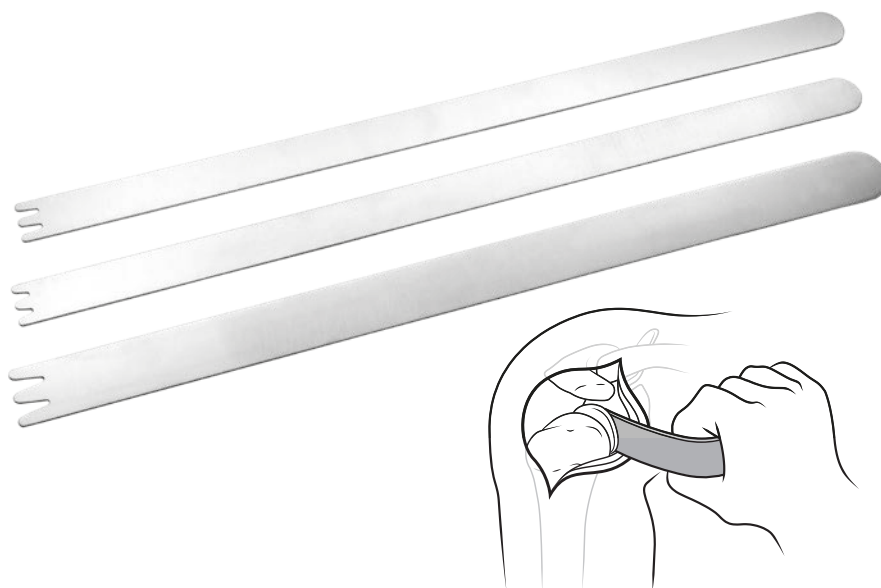

Weatherly Mini-Deltoid Retractors

Designed for the retraction of the deltoid in a mini-open mid-deltoid splitting approach to rotator cuff surgery, the offset handle helps allow clear visualization of the surgical field, and the ergonomic non-slip handle surface helps prevent fatigue in the operative team


PRODUCT NO'S:

5110-L [Large]
Overall Length: 12.75" (32,4 cm)
Depth from Bend: 4.5" (11,4 cm)
Blade Dimensions: 40 mm x 90 mm

5110-M [Medium]
Overall Length: 11" (27,9 cm)
Depth from Bend: 3" (7,6 cm)
Blade Dimensions: 40 mm x 55 mm

5110-S [Small]
Overall Length: 10.5" (26,7 cm)
Depth from Bend: 2.5" (6,4 cm)
Blade Dimensions: 40 mm x 40 mm

Designed by
Wallace Weatherly, MD



McFarland Malleable Shoulder Retractors

Designed to enhance exposure in shoulder procedures

PRODUCT NO'S:

4537-00 [Set of Three Sizes]

Also available individually:

4537-01 [Narrow Deep]
Overall Length: 15.5" (39,4 cm)
Prong Depth: 10 mm

4537-02 [Narrow Shallow]
Overall Length: 15.5" (39,4 cm)
Prong Depth: 6.8 mm

4537-03 [Wide]
Overall Length: 15.5" (39,4 cm)
Prong Depth: 13.5 mm

Designed by
Edward McFarland, MD



Capsule Retractors

Designed for use in Bankart surgery

The single prong retractor is commonly used when retracting on the inferior rim of the glenoid. The two and three-prong retractors are designed to be placed medially along the scapular neck to retract the anterior capsule and labrum.

PRODUCT NO'S:

T1008-01 [3 Prongs]
Overall Length: 10" (25,4 cm)
Prong Length: 30 mm

T1008 [2 Prongs]
Overall Length: 10" (25,4 cm)
Prong Length: 30 mm

T1009 [1 Prong]
Overall Length: 10" (25,4 cm)
Prong Length: 30 mm



Shoulder Instruments


PRODUCT NO:

1900 [Complete Set]

 Designed by Evan Flatow, MD
& Louis Bigliani, MD

Thin Glenoid Retractors

Used for retraction of the anterior and posterior aspects of the anterior and posterior glenoid rim.

PRODUCT NO'S:

1910 [Narrow]

Blade Width: 14 mm

Overall Length: 11" (27,9 cm)

1920 [Wide]

Blade Width: 22 mm

Overall Length: 11" (27,9 cm)

Modified Darrach-type Elevators

Used for soft tissue retraction and exposure. May also be used to lever the humeral head inferiorly or superiorly and medially to expose the humeral head from the glenoid while dislocating the humeral head after subcapularis removal. May also be used to retract the humeral shaft posteriorly to help expose the glenoid.

PRODUCT NO'S:

1950 [3/8" (10 mm)]

Blade Width: 10 mm

Overall Length: 10.75" (27,3 cm)

1960 [3/4" (19 mm)]

Blade Width: 19 mm

Overall Length: 10.75" (27,3 cm)

1955 [1/2" (13 mm)]

Blade Width: 12 mm

Overall Length: 10.75" (27,3 cm)

1965 [1.0" (25 mm)]

Blade Width: 25 mm

Overall Length: 10.75" (27,3 cm)

Spiked Darrach-type Elevator

The spiked elevator is used slightly below the anterior rim of the glenoid to help retract the labrum and anterior capsule.

PRODUCT NO:

1970 [Narrow]

Blade Width: 19 mm

Overall Length: 10.75" (27,3 cm)

Posterior Glenoid Elevators

Used to help expose the posterior aspect of the glenoid. The curved tip allows the elevator to fit on the posterior rim of the glenoid. The curve in the elevator contours to the humeral shaft for posterior retraction.

PRODUCT NO'S:

1980 [3/8" (10 mm)]

Blade Width: 10 mm

Overall Length: 11" (27,9 cm)

1985 [1/2" (13 mm)]

Blade Width: 12 mm

Overall Length: 11" (27,9 cm)

1990 [3/4" (19 mm)]

Blade Width: 19 mm

Overall Length: 11" (27,9 cm)

Modified Fukuda-type Retractors

Used to retract the humeral shaft posteriorly and helping to expose the entire glenoid surface.

PRODUCT NO'S:

1930 [Narrow]

Blade Width: 32 mm

Opening: 25 x 40 mm

Overall Length: 7.25" (18,4 cm)

1940 [Wide]

Blade Width: 38 mm

Opening: 32 x 40 mm

Overall Length: 7.25" (18,4 cm)

Bicep Elevator

Used to help retract the biceps tendon superiorly. The two extensions allow the long head of the biceps to fit between them. The edges fit on the superior portion of the glenoid rim.

PRODUCT NO:

1975

Blade Width: 25 mm

Overall Length: 10.75" (27,3 cm)





Deltoid Retractor

Fits easily under the acromion, deltoid and over the humeral head

- ▶ Used in most open procedures

PRODUCT NO:

T1001
Width: 30 mm
Overall Length: 8" (20,3 cm)



Posterior Glenoid Neck Retractor

Used during osteotomy of the humeral head and approaches to the glenoid

- ▶ Designed to allow one finger retraction
- ▶ Contours to allow teeth to fit behind the glenoid, retracting tissue for easy access to the glenoid

PRODUCT NO:

T1002
Width: 30 mm
Overall Length: 10" (25,4 cm)



Anterior Glenoid Neck Retractor

Teeth are specifically designed to retract the subscapularis and capsule medially during a Bankart procedure

- ▶ The wide midsection retracts the soft tissue during anterior glenoid work
- ▶ The curved handle allows the assistant to use minimal pressure to achieve exposure

PRODUCT NO:

T1003
Width: 25 mm
Overall Length: 11" (27,9 cm)



Goldstein Glenoid Neck Retractor

Placed along the glenoid rim during open Bankart procedure to allow excellent exposure

- ▶ The convex teeth sit easily into the glenoid rim while the strong end of the shaft allows the instrument to stay out of the surgeon's view

PRODUCT NO:

T1004
Blade Width at Teeth: 18 mm
Blade Width at Widest: 36 mm
Overall Length: 8.5" (21,6 cm)



Humeral Head Retractor

Placed between the glenoid and the humeral head to obtain excellent exposure

PRODUCT NO:

T1007
Blade Width: 33 mm
Prong Width: 6 mm | 21 mm Gap | 6 mm
Overall Length: 7" (17,8 cm)

MADE FOR INNOMED IN GERMANY

Hawkins Shoulder Instruments

Designed to enhance exposure during shoulder arthroplasty procedures

PRODUCT NO'S:

5090 [Small Spreader w/Articular Arms]
 Overall Length: 6.25" (15,9 cm)
 Arm Depth: 2.25" (5,7 cm)
 Prong Width: 21 mm
 Prong Length: 16 mm

5091 [Large Spreader w/Articular Arms]
 Overall Length: 10.5" (26,7 cm)
 Arm Depth: 2.375" (6 cm)
 Prong Width: 23 mm
 Prong Length: 23 mm

5092 [Anterior Capsular Retractor]
 Overall Length: 11.25" (28,6 cm)
 Handle Length: 5.25" (13,3 cm)
 Blade Depth: 3.25" (8,3 cm)
 Blade Width: 19 mm

5093 [Small Pectoralis Retractor]
 Overall Length: 10.25" (26 cm)
 Handle Length: 5.25" (13,3 cm)
 Blade Depth: 2.5" (6,4 cm)
 Blade Width: 25 mm

5094 [Extra Small Pectoralis Retractor]
 Overall Length: 11" (27,9 cm)
 Handle Length: 5.25" (13,3 cm)
 Blade Depth: 1.5" (3,8 cm)
 Blade Width: 25 mm

5095 [Cobb Elevator]
 Overall Length: 11" (27,9 cm)
 Handle Length: 5.5" (14 cm)
 Blade Width: 19 mm

5096 [Humeral Head Retractor]
 Overall Length: 9" (22,9 cm)
 Blade Depth: 2.75" (7 cm)
 Blade Width: 37 mm

5097 [Anterior Glenoid Retractor]
 Overall Length: 11" (27,9 cm)
 Blade Depth: 2.75" (7 cm)
 Blade Width @ Fat Pad: 34 mm
 Blade Width @ Neck: 18 mm

5098 [Deltoid Retractor]
 Overall Length: 9.5" (24,1 cm)
 Blade Depth: 3.75" (9,5 cm)
 Blade Width @ Fat Pad: 45 mm
 Blade Width @ Neck: 32 mm

5099 [Modified Darrach Retractor]
 Overall Length: 10.75" (27,3 cm)
 Blade Width: 19 mm

Designed by Richard J. Hawkins, MD



Large Spreader
w/Articular Arms

Small Spreader
w/Articular Arms



Anterior
Capsular
Retractor

Small
Pectoralis
Retractor

Extra Small Pectoralis Retractor

Cobb Elevator



Humeral
Head Retractor

Anterior Glenoid
Retractor

Deltoid
Retractor

Modified Darrach Retractor



Bell-Hawkins Shoulder Frame and Blade Set

Retractor and Frame System for Total Shoulder Arthroplasty

PRODUCT NO'S:

4696-00 [Bell-Hawkins – Complete Set]

Included in Set/Available individually:

4696-01 [Small Adjustable Retractor]

Overall Length: 7.375" (18,7 cm)
Handle Length: 6" (15,2 cm)
Blade Width: 1.25" (32 mm)
Blade Depth: .8" (20 mm)

4696-02 [Medium Adjustable Retractor]

Overall Length: 7.375" (18,7 cm)
Handle Length: 6" (15,2 cm)
Blade Width: 1.7" (43 mm)
Blade Depth: 1.25" (32 mm)

4696-03 [Deep Adjustable Retractor]

Overall Length: 7.375" (18,7 cm)
Handle Length: 6" (15,2 cm)
Blade Width: 1.6" (41 mm)
Blade Depth: 2" (51 mm)

4696-04 [Small Fixed Retractor]

Overall Length: 3" (7,6 cm)
Handle Length: 1.5" (3,8 cm)
Blade Width: 1.25" (32 mm)
Blade Depth: .8" (20 mm)

4696-05 [Medium Fixed Retractor]

Overall Length: 3" (7,6 cm)
Handle Length: 1.5" (3,8 cm)
Blade Width: 1.7" (43 mm)
Blade Depth: 1.25" (32 mm)

4696-06 [Deep Fixed Retractor]

Overall Length: 3" (7,6 cm)
Handle Length: 1.5" (3,8 cm)
Blade Width: 1.25" (32 mm)
Blade Depth: 2.375" (60 mm)


4696-07 [Adjustable Lock Block]

Dimensions: 1.375" x 1" x .85" (35 mm x 25 mm x 20 mm)

4696-Frame [Frame Assembly]

Dimensions: 10" x 9" (25,4 cm x 22,9 cm)

Designed by Robert H. Bell, MD and Richard Hawkins, MD

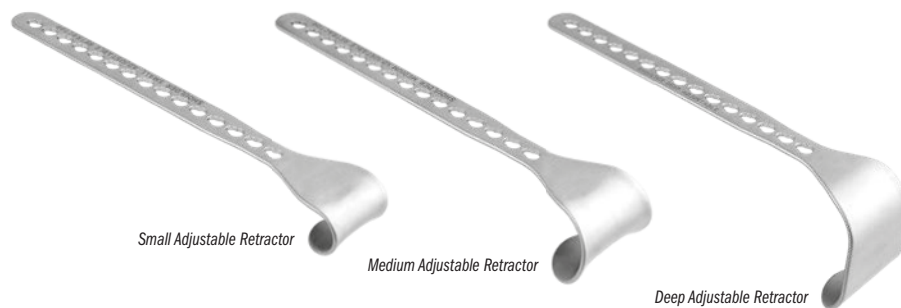

Small Adjustable Retractor

Medium Adjustable Retractor

Deep Adjustable Retractor




Small Fixed Retractor



Medium Fixed Retractor



Deep Fixed Retractor

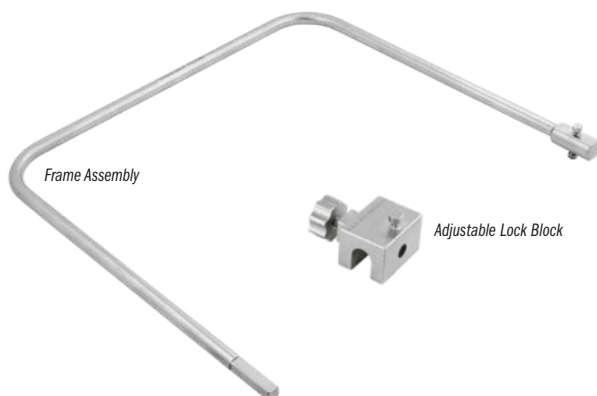

Frame Assembly

Adjustable Lock Block



McFarland Shoulder V Retractor

Designed to provide deep access to the glenoid rim when performing a subscapularis splitting approach to the shoulder

Fluted to enhance visualization and room when placing sutures in the capsular flaps prior to placing three prong retractors.

PRODUCT NO:

4851

Overall Length: 9" (22,9 cm)
Length To Bend: 8.5" (21,6 cm)
Handle Length: 4" (10,2 cm)
Blade Depth: 2.75" (7 cm)
Blade Width: .625" (1 cm)

Designed by
Edward McFarland, MD



Kaminsky OrthoLucent™ Browne-type Deltoid Retractors

Used for the Delto-Pectoral Approach—can remain in place for fracture reduction, plate positioning, and screw/wire/drill location confirmation

Used for acromioplasty, rotator cuff repair, and fracture fixation. Contours the humeral head with deltoid retraction allowing extensive exposure. Helps to reduce operative time, assist in fracture reduction, and maintain hardware position without the frequent need for retractor removal and reintroduction.

The OrthoLucent™ carbon fiber PEI composite material is strong, lightweight, completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.

PRODUCT NO'S:

1670-01R [Small]

Blade Width: 4,5 cm

Overall Length: 10.5" (26,7 cm)


1670-02R [Large]

Blade Width: 5,4 cm

Overall Length: 10.5" (26,7 cm)

Designed by Sean B. Kaminsky, MD

MADE EXCLUSIVELY
FOR INNOVIMED IN
SWITZERLAND

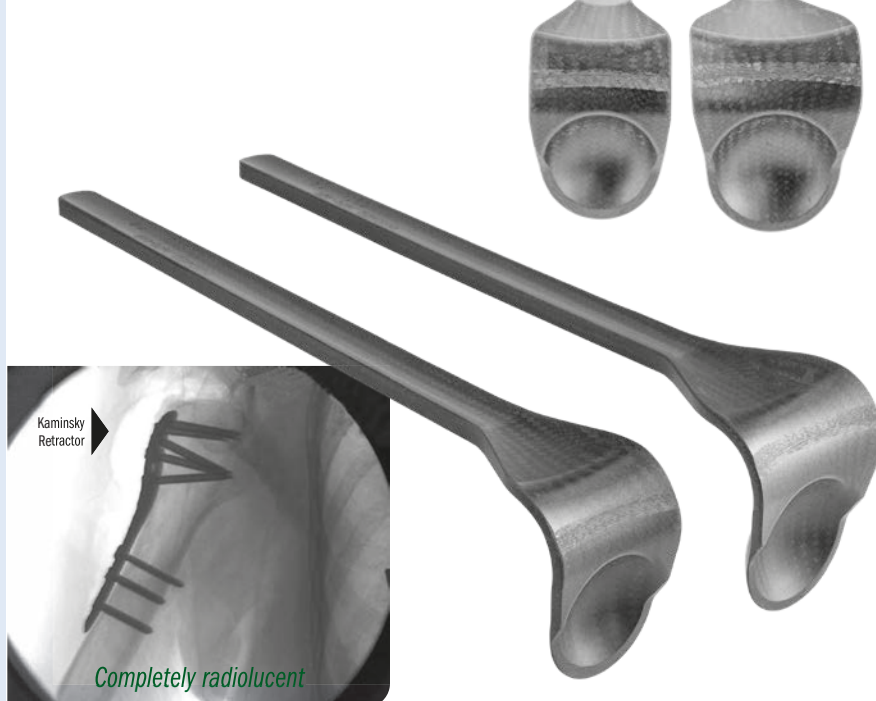

Browne Deltoid Retractor

Used for the Delto-Pectoral Approach

Contours the humeral head with effortless deltoid retraction allowing extensive exposure.

PRODUCT NO'S:

1670-01 [Small]

Blade Width: 4,5 cm


Overall Length: 11.5" (29,2 cm)

1670-02 [Large]

Blade Width: 5,7 cm

Overall Length: 11.5" (29,2 cm)

MADE FOR INNOVIMED IN
GERMANY

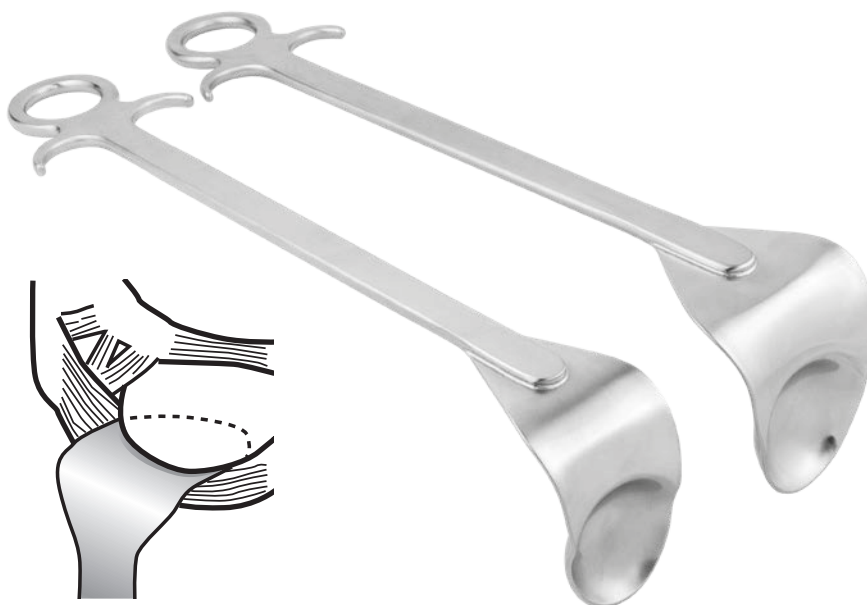

Levy Wide Deltoid Retractor

Designed for management of proximal humerus fractures—facilitates appropriate deltoid retraction without interference during active fluoroscopy

Contoured to match the curve of the deltoid, the retractor helps to retract the entire deltoid laterally during the deltopectoral approach. The width approximates 2/3 the length of the deltoid, while the blade is deep enough to help control the entire deltoid without displacement of the tuberosity reduction. Sized to fit deltoids in small and large patients.

PRODUCT NO:

1672

Overall Length: 11.75" (29,8 cm)

Blade at Widest: 2.5" (6,4 cm)

Blade Depth: 1.375" (3,5 cm)

Designed by Jonathan Levy, MD

MADE
USA MADE

Patent Pending



Horseshoe Shoulder Frame and Blade Assembly

Designed to enhance exposure during shoulder arthroplasty procedures



PRODUCT NO'S:

2030-00 [Set]
Set includes (1) Frame, (1) of Each Blade Style

Also available individually:

2030-01 [Horseshoe Frame]
Overall Dimensions: 7" x 5" (17,8 cm x 12,7 cm)
Frame Width: .7" (15 mm)




2030-02 [Blade – Wide]
Blade Width: 22 mm
Overall Length: 11" (27,9 cm)

2030-03 [Blade – Narrow]
Blade Width: 14 mm
Overall Length: 11" (27,9 cm)

2030-04 [Blade – Narrow, Bent]
Blade Width: 14 mm
Overall Length: 10" (25,4 cm)
Handle Length: 4.5" (11,4 cm)

2030-05 [Blade – Small Narrow]
Blade Width: 16 mm
Blade Depth: 2"
Overall Length: 8.5" (21,6 cm)

2030-06 [Blade – Inferior]
Blade Width: Outside 34 mm, Inside 24 mm
Overall Length: 11.5" (29,2 cm)
Prong Length: 28 mm

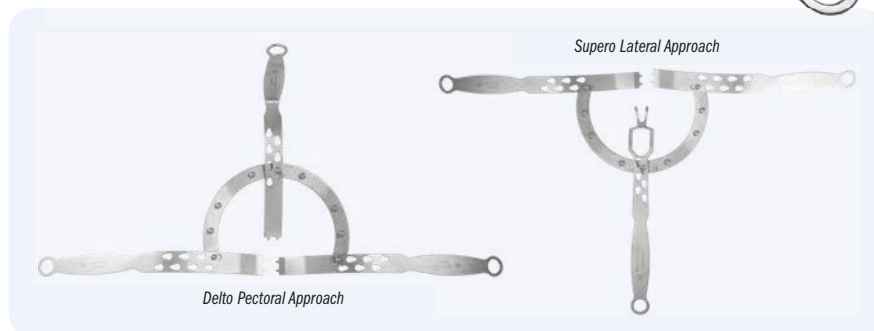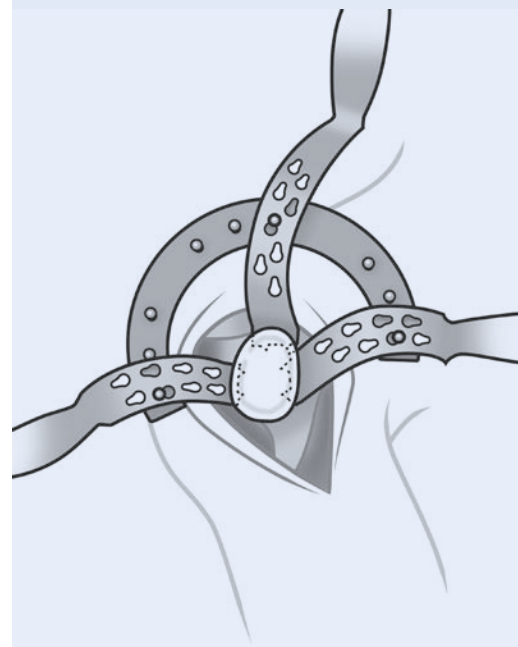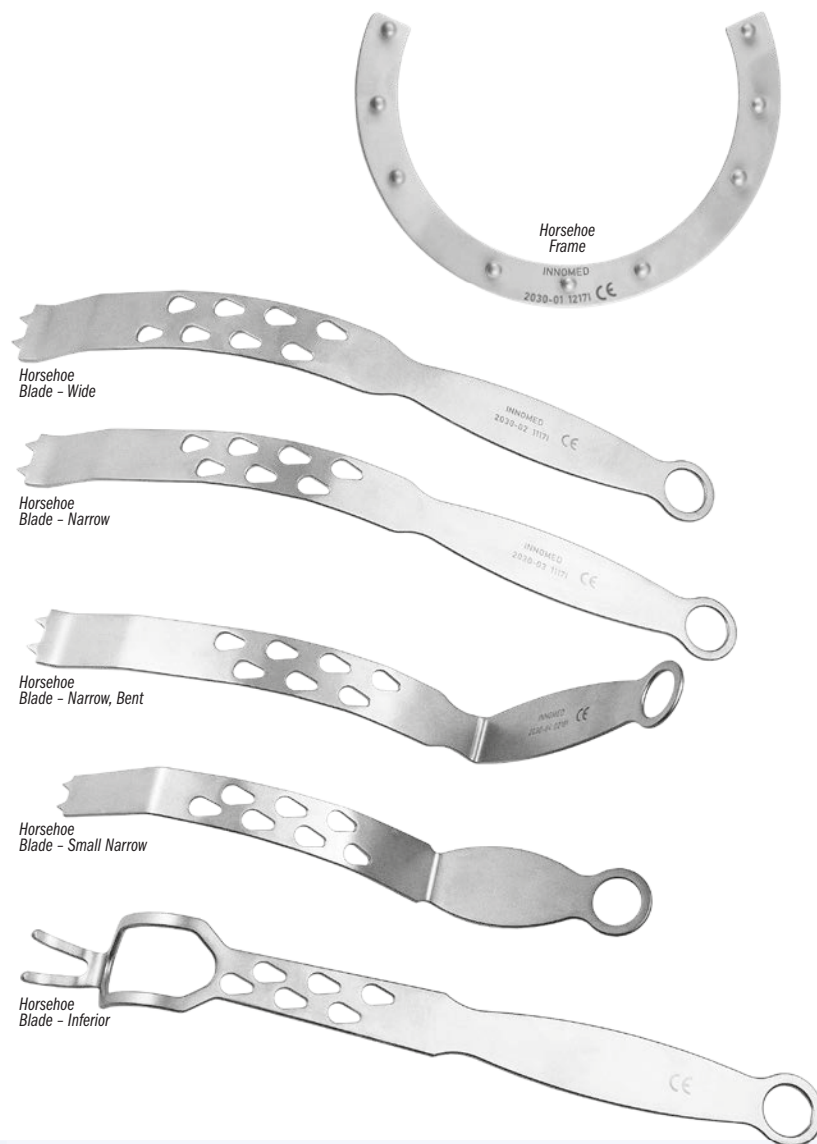

Humeral Protection Plates

Helps protect the proximal humerus from fracture after humeral head osteotomy

Plate is placed on the proximal humerus after the initial osteotomy of the humeral head for total shoulder replacement. Helps protect the proximal humerus from fracture as the humerus is retracted to gain visualization of the glenoid to prepare it for a glenoid implant.

PRODUCT NO'S:

5259-01 [46 mm]

5259-02 [50 mm]

Designed by Ronald E. Delanois, MD



Suprascapular Ligament Cutter

Designed to cut the transverse ligament while helping to protect the suprascapular nerve


PRODUCT NO:

1794

Overall Length: 11.25" (28,6 cm)



Designed by Michael Craig, OPA-C

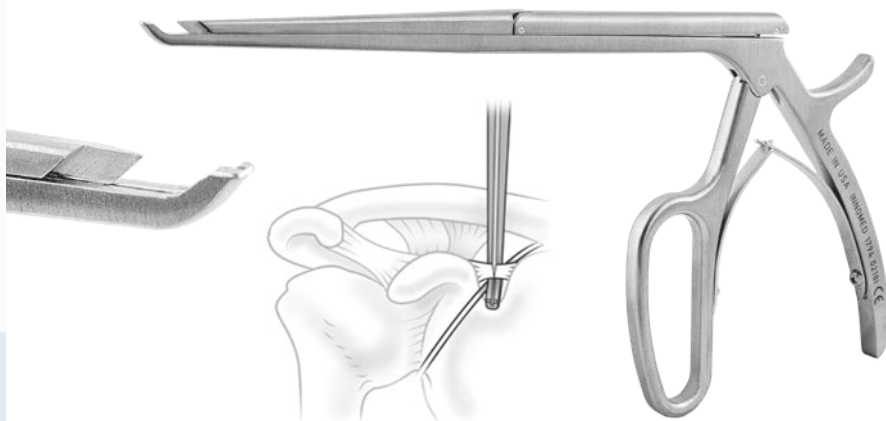

McFarland Bent Cobb Elevator

Designed for retraction while helping to protect the axillary nerve in shoulder surgery

Ultra hard titanium nitride coating helps to prolong sharpness.

Designed by Edward McFarland, MD

PRODUCT NO:

3431

Overall Length: 9.5" (24,1 cm)

Length from Bend: 3.5" (8,9 cm)

Cobb End Width: .8" (20 mm)

Angle of Bend: 30°



Bacastow Axillary Nerve Retractor with Suction

Designed with a curved tip to slip all the way under the capsule during shoulder surgery, helping to protect the axillary nerve, while also providing suction of smoke away from the surgical site

Made of autoclavable Radel material, the unit is non-conductive of current and resists the high temperatures associated with the use of electrocautery.

Designed by David Bacastow, MD


PRODUCT NO:

8739

Overall Length: 11" (27,9 cm)

Width: .5" (12,7 mm)

Tongue Length: 1.2" (30 mm)

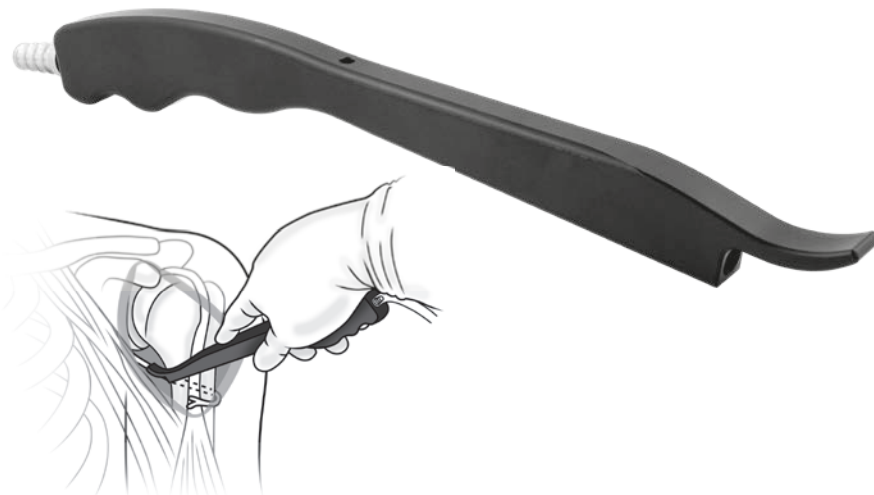

Axillary Nerve Protector

Designed for inferior capsular release during shoulder arthroplasty and glenoid exposure

The tapered freer end helps separate the axillary nerve and inferior capsule, even in difficult exposures. Non-conductive material allows the use of a bovie knife directly in the small channel cutting guide (on both sides). Reversible for right and left use.

Designed by Brett Sanders, MD

PRODUCT NO:

8029

Overall Length: 7.125" (18,1 cm)

Width: 12 mm

Thickness: 4 mm





New!



Small Bone Awls

Designed to help with manipulation of bone fragments for fixation

PRODUCT NO'S:

5078 [Standard]
Overall Length: 10.5" (26,7 cm)
Handle Length: 5" (12,7 cm)

5078-01 [Long]
Overall Length: 13.375" (34 cm)
Handle Length: 6" (15,2 cm)



Designed by Reza Firoozabadi, MD



Coated Inserter for Reverse Shoulder Glenosphere Components

Designed to aid in the insertion of glenospheres in limited exposure patients, allowing for insertion from the side, with a coating to help protect from marring component surfaces

PRODUCT NO:

5071
Overall Length: 9.5" (24,1 cm)
Inserter Arm Angle: 30°



Designed by Michael Radon, Ilya Voloshin, MD, and Nathan Mineo



Burkhead Glenoid Inserter

Designed to help insert a glenoid component

PRODUCT NO:

4689
Overall Length: 9.875" (25,1 cm)



Designed by Wayne "Buzz" Burkhead, Jr, MD, Michael Radon, and Aaron Merges



Glenoid Inserter

Designed for final implantation of the glenoid prosthesis into the body

Grasping ends are coated to help protect from scratching the component surfaces.

PRODUCT NO:

5076
Overall Length: 8.5" (21,6 cm)



Designed by Chase Kuhn & J. Kevin Rudder, MD

Levy Humeral Stem Extraction Punch

Ultra hard cobalt chrome shaft and impactor tip designed to help remove a humeral stem during revision total shoulder arthroplasty

Can be used to open up distal cement mantle or pedestal during revisions.

PRODUCT NO:

8627

Overall Length: 12" (30,5 cm)

Handle/Platform Length: 4.75" (12,1 cm)

Punch Rod Length: 7.25" (18,4 cm)


Platform: 3" x .75" (7,6 cm x 1,9 cm)

Shaft Diameter: 8 mm, tapers to 4 mm at tip



USA MADE


Designed by Jonathan Levy, MD

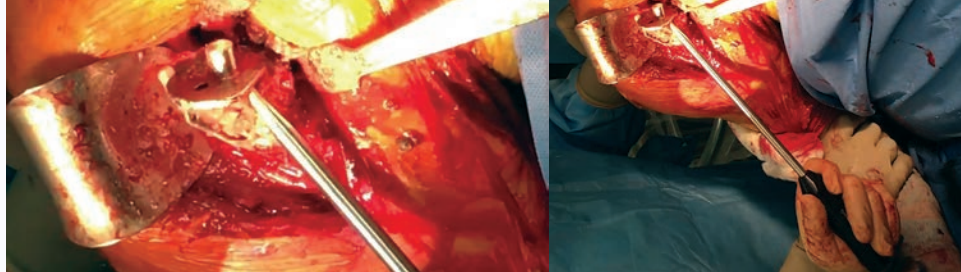

Nicholson Universal Humeral Prosthesis Extractor

Designed to fit most humeral prostheses

Includes a slaphammer, two non-sterile 2.5 mm cables, and a sterilization case.

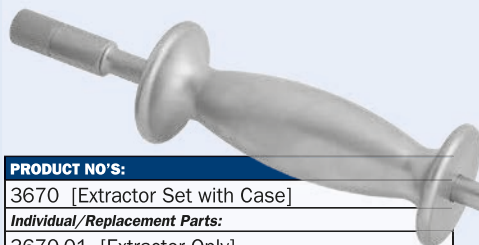

PRODUCT NO'S:

3670 [Extractor Set with Case]

Individual/Replacement Parts:

3670-01 [Extractor Only]

3670-10 [Foot Adapter]

3670-CABLE [2.5 mm Cable] Package of 2

9006 [Case Only]





3925-A12 [12" (30,5 cm) Slaphammer Rod Only]


3925-H [Slaphammer Only (No Rod)]

Designed by Gregory Nicholson, MD



USA MADE

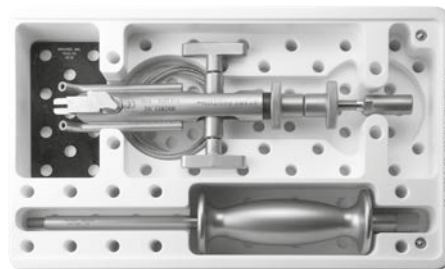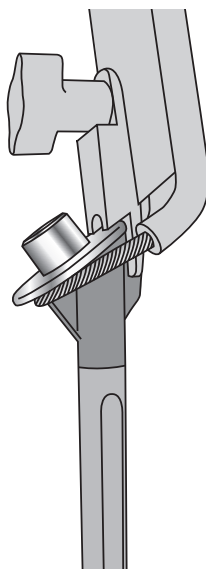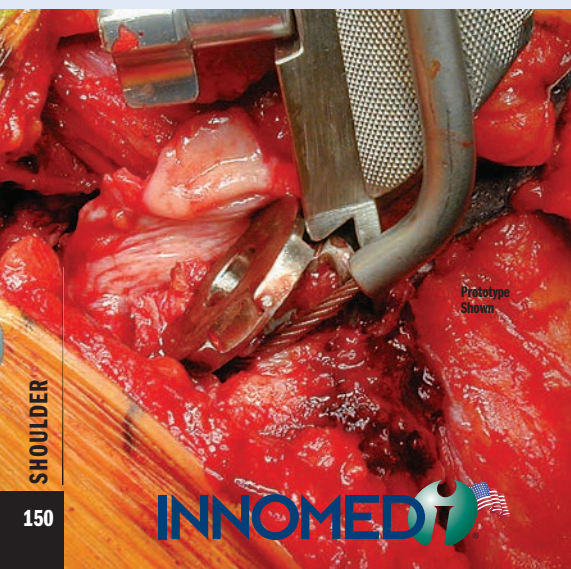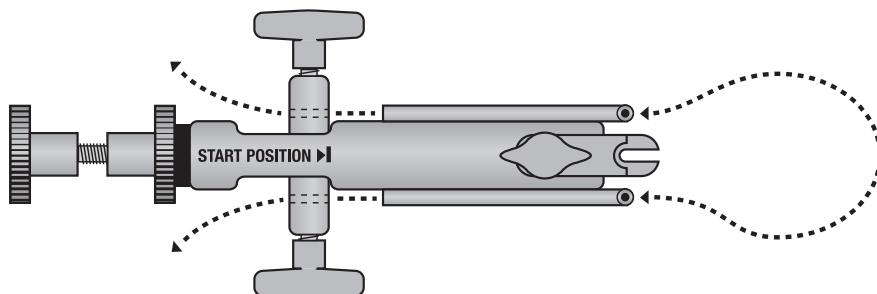



Nicholson Small Bone and Shoulder Cement Removal Gouges

Designed to facilitate cement removal in smaller diameter bone of the humerus, ulna, and smaller implant geometries

- ▶ Reverse bevel tip helps the gouge to slide between the bone and cement.
- ▶ T-shaped Gouge-Splitter allows the gouge to slide between the cement and bone and vertically split the cement mantle to facilitate removal.
- ▶ Small diameter widths and curvatures more closely match shoulder and elbow implants and smaller bone diameters.
- ▶ Shorter length allows for better control and access.

PRODUCT NO'S:

Gouges Overall Length: 9" (22,9 cm)
Gouges Handle Length: 4" (10,2 cm)

5251-00 [Complete Set w/Case]

5251-05 [Extra Small]
Gouge Width: 5 mm

5251-07 [Small]
Gouge Width: 7 mm

5251-09 [Medium]
Gouge Width: 9 mm

5251-11 [Large]
Gouge Width: 11 mm

5252-07 [Small w/Splitter]
Gouge Width: 7 mm
Splitter Height: 4 mm

5252-09 [Medium w/Splitter]
Gouge Width: 9 mm
Splitter Height: 5 mm

5252-11 [Large w/Splitter]
Gouge Width: 11 mm
Splitter Height: 6 mm

5254 [Backhook]
Overall Length: 12.5" (31,8 cm)
Handle Length: 4.5" (11,4 cm)
Shaft Diameter: 4 mm

5255 [Footed Impactor]
Foot Pad Size: 8.5 mm x 11.5 mm
Shaft Diameter: 8.5 mm
Overall Length: 12.75" (32,4 cm)
Handle Length: 4.5" (11,4 cm)

5253 [Case for Set]

Designed by
Gregory Nicholson, MD



INNOMED, INC. 5251-05 02121 CE Extra Small Gouge

INNOMED, INC. 5251-07 02121 CE Small Gouge

INNOMED, INC. 5251-09 02121 CE Medium Gouge

INNOMED, INC. 5251-11 03121 CE Large Gouge

INNOMED, INC. 5252-07 02121 CE Small Gouge with Splitter

INNOMED, INC. 5252-09 03121 CE Medium Gouge with Splitter

INNOMED, INC. 5252-11 03121 CE Large Gouge with Splitter

Backhook

INNOMED, INC. P/N 5255 04121 CE Footed Impactor

Used to help remove a humeral implant by impacting the medial collar of the prosthesis – helps provide a very direct parallel force to the implant for removal

INNOMED, INC. P/N 5255 04121 CE

The distal, footed end of the impactor is positioned under the neck rim of the prosthesis, and a mallet is used to strike the large proximal platform of the impactor to help loosen and remove the prosthesis in line with the stem.

Nicholson Footed Impactor

Designed to help remove a humeral prosthesis by impacting the medial collar from underneath, after a gap has been exposed between the rim/bone interface

PRODUCT NO:

5255
Foot Pad Size: 8.5 mm x 11.5 mm
Shaft Diameter: 8.5 mm (21,6 cm)
Overall Length: 12.75" (32,4 cm)
Handle Length: 4.5" (11,4 cm)

Designed by Gregory Nicholson, MD



Auerbach Arm Holder Rake Retractor Set

Allows intraoperative positioning for procedures of the posterior arm, elbow, and forearm

- ▶ Simple design for fast and easy positioning
- ▶ Connects over the drape in the sterile field using the supplied rail clamp and post
- ▶ Can be repositioned during surgery
- ▶ Sterilizable rubber pad protects the arm
- ▶ Retractors for the skin and soft tissues connect to the holder
- ▶ Compact for easy storage

PRODUCT NO'S:

2415-00 [Arm Holder Rake Retractor Set]

Individual/Replacement Parts:

2415-01 [Arm Holder Assembly]

Overall Length: 20" (50,4 cm)

Arm Holder Dimensions: 14.5" x 4" (36,9 x 10,2 cm)

Overall Width including Cleats: 7.5" (19,1 cm)

2415-02 [Arm Holder Upright Rod]

Overall Length: 19.25" (49,9 cm)

2415-04 [Rake Chain Retractor 4-Prong]

Two included in set, one with this product number

Overall Length including Chain: 10" (25,4 cm)

Retractor Width: .75" (1,9 cm)

2415-06 [Rake Chain Retractor 6-Prong]

Two included in set, one with this product number

Overall Length including Chain: 10" (25,4 cm)

Retractor Width: 1.25" (3,2 cm)

2590-S01 [Black Strap]

Two included in set, one with this product number

Dimensions: 1" x 24" (2,5 x 61 cm)

2595 [Table Clamp]

2770-P [Silicone Pad]

Dimensions: 12" x 5.5" (30,5 x 14 cm)


Replacement Parts:

2590-S [Black Straps] Pkg of 10

Designed by David M. Auerbach, MD



New!

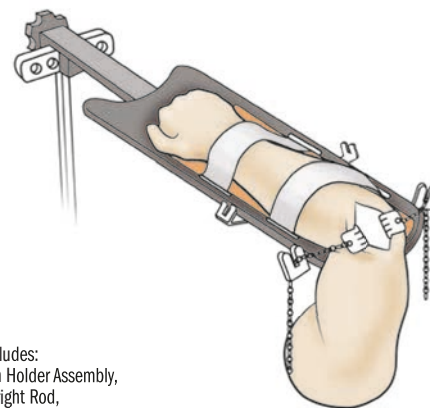

Set includes:

- (1) Arm Holder Assembly,
- (1) Upright Rod,
- (2) 4-Prong Rake Chain Retractors,
- (2) 6-Prong Rake Chain Retractors,
- (2) Black Straps,
- (1) Table Clamp,
- (1) Silicone Pad

Argintar Bicep Tenodesis Sleeve

Designed to help facilitate mini-open sub-pectoral bicep tenodesis—by maintaining the trajectory of the drill with the serrated end of the sleeve, the drilled humeral holes are easily found with standard percutaneous placement of the bicortical button

Once flipped, the slotted cut out in the sleeve makes detachment of the button applicator possible, helping with efficient and reproducible mini-open bicep tenodesis using button technique.

PRODUCT NO:

5835



Overall Length: 4" (10,2 cm)

External Diameter: 6,35 mm

Internal Diameter: 5 mm

Slot: 2,75 mm

Designed by Evan Argintar, MD

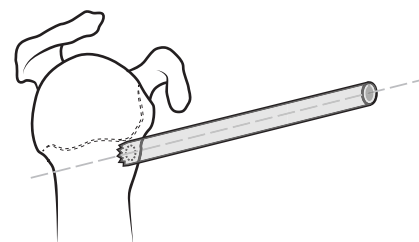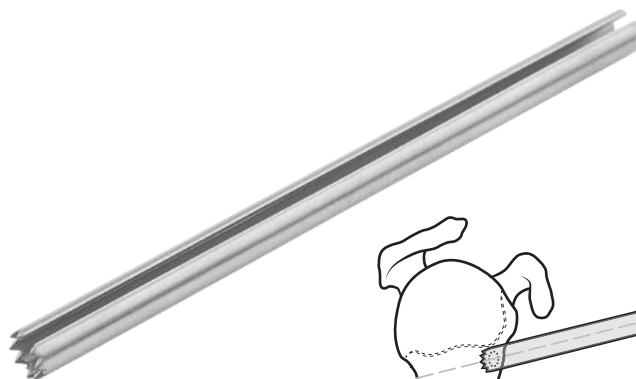

Beard Distal Radius Wide Hohmann Retractor

Designed for distal radius and diaphyseal fracture exposure, the wide blade design helps to protect soft tissues, and the curved handle helps provide improved access and visualization


PRODUCT NO:

5837-01

Overall Length: 5.375 (13,7 cm)

Blade Width: 1" (25 mm)

Designed by David Beard, MD

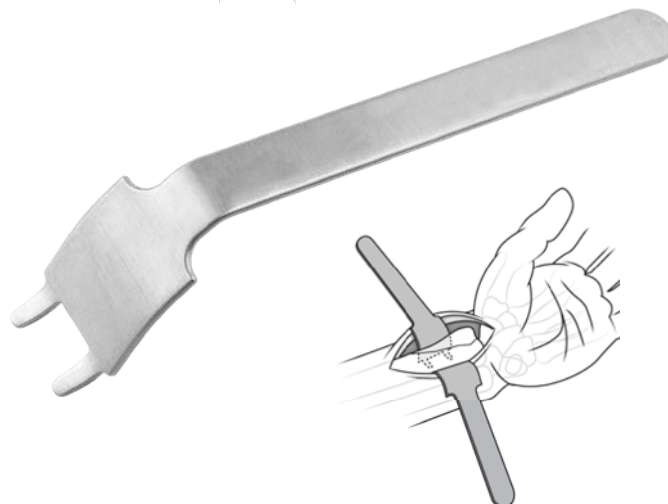



Lateral Condyle Fracture Set

Designed for adult and pediatric lateral condyle fractures

The asymmetric clamps (1756-L & 1756-R) are shaped to secure the lateral condyle fragment. The straight tip is placed in the coronoid fossa and the curved tip is used to grasp and compress the lateral condyle fragment. The symmetric reduction clamp (1755) is useful to compress T-condylar fractures, and in many other fracture reduction applications.

PRODUCT NO'S:	
4697-00	[Set with Case]
Set Includes:	
1755	[Clamp – Symmetric] Overall Length: 8.5" (21,6 cm) Jaw opens to: 3" (7,6 cm)
1756-L	[Clamp – Asymmetric Left] Overall Length: 8.75" (22,2 cm)
1756-R	[Clamp – Asymmetric Right] Overall Length: 8.75" (22,2 cm)
4697	[Elbow Retractor] Overall Length: 6.5" (16,5 cm) Blade Width: 1" (2,54 cm)
1015	[Sterilization Case] Dimensions: 11.25" x 7.125" x 3.125" (28,6 cm x 18,1 cm x 7,9 cm)



Designed by Carl R. Weinert, MD



Weinert Elbow Retractor

Designed for use within the elbow joint to retract the anterior capsule, and provide full exposure of the anterior articular surface for reduction and fixation of displaced lateral condyle fractures

The small blunt tip hooks over the intact medial condyle.



Weinert Bone Holding Reduction Clamps

Designed to securely hold fracture reductions

The stops on each end help prevent excessive penetration of metaphyseal and soft bone.



Calvo Olecranon Reducing Forceps

Designed to reduce and hold in place transverse fractures of the olecranon to facilitate the insertion of k-wires and tension bands

Also very useful in malleolus fractures.

PRODUCT NO'S:	
1801-L	[Left]
1801-R	[Right]

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY



Designed by Ignacio J. Calvo, MD



Sanders Pin Inserters

Designed to aim and control the placement of flexible k-wires when they contact hard cortical bone, while helping to protect neurovascular structures from the spinning wire

Inserters ends are smooth and can be passed through skin and tissue with less danger to neurovascular structures. Can be inserted through appropriately placed small peripheral incisions and placed on the bone with direct vision from the primary incision. The K wire is then passed through the inserter, helping to protect adjacent soft tissue structures.

Ideal for wrist surgery such as distal radius fractures, intercarpal fusions, carpal dislocations, etc., where K-wires must be inserted from angles not accessible through the initial incision. Also useful for arthroscopic fixation of the scaphoid.

PRODUCT NO'S:

3015-081

Accepts k-wires up to: .081" (2 mm)
Tube Length: 1.875" (4,8 cm)
Overall Length: 4.25" (10,8 cm)
Handle Length: 3.15" (8 cm)

3015-054

Accepts k-wires up to: .054" (1,4 mm)
Tube Length: 1.875" (4,8 cm)
Overall Length: 4.25" (10,8 cm)
Handle Length: 3.15" (8 cm)

Designed by
Richard Sanders, MD



Mogul K-Wire/Pin Insertion Guide

A guide designed for passing guide pins or k-wires through two adjacent metatarsal bones


PRODUCT NO:

3017

Dimensions: 2.375" Tall x 3.75" Wide (6 x 9,5 cm)
Maximum Pin Diameter: 3/32" (2,4 mm)
Maximum Clamped Opening: 2" (5,1 cm)
Minimum Clamped Opening: .375" (1 cm)
Pin/K-Wire Guide Length: .925" (23,5 mm)



Designed by Stuart J. Mogul, DPM, FACFAS

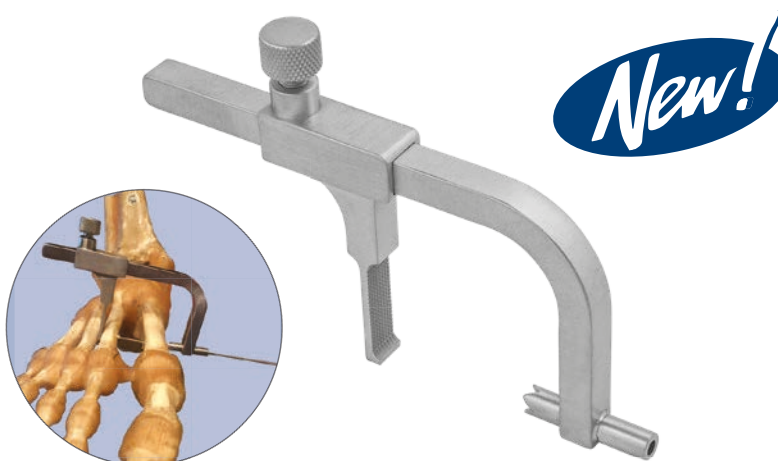

Redler Wrist Bone Clamp with Wire Guide

Designed to hold bony fragments in place for placement of guide wires

Can be used for:

- Placement of pins across distal radius fractures or across carpal bones
- Arthroscopically assisted fixation in the wrist
- Fracture fragments about the elbow
- Placement of guide wires during the open reduction and internal fixation of a patella fracture

PRODUCT NO'S:

1885-45

For Pins up to: .045" (1,1 mm)
Overall Length: 9.5" (24,1 cm)
Jaw opens to: 3.5" (8,9 cm)

1885-62

For Pins up to: .062" (1,6 mm)
Overall Length: 9.5" (24,1 cm)
Jaw opens to: 3.5" (8,9 cm)

Two sizes available:
For use with .045" (1.1 mm)
or .062" (1.6 mm) K-wires.

Designed by M.R. Redler, MD





Redler Percutaneous Pin Clamp

Holds a small bone in apposition during percutaneous pinning of a fracture

Designed with a proximal pin tube with teeth; the tube guides the pin and the teeth help keep the tube in place on the bone. The distal tip is used to control the bone fragment. Includes a long ratchet for locking on various sized bones, from 1 mm to 14 mm. Also useful during insertion of cannulated screw guide wires.

PRODUCT NO'S:


Overall Length: 5" (12,7 cm)
1810-35 Tube Diameter: .035" (0,9 mm)
1810-45 Tube Diameter: .045" (1,1 mm)
1810-62 Tube Diameter: .062" (1,6 mm)



Designed by M.R. Redler, MD



(Prototype used in X-ray images)

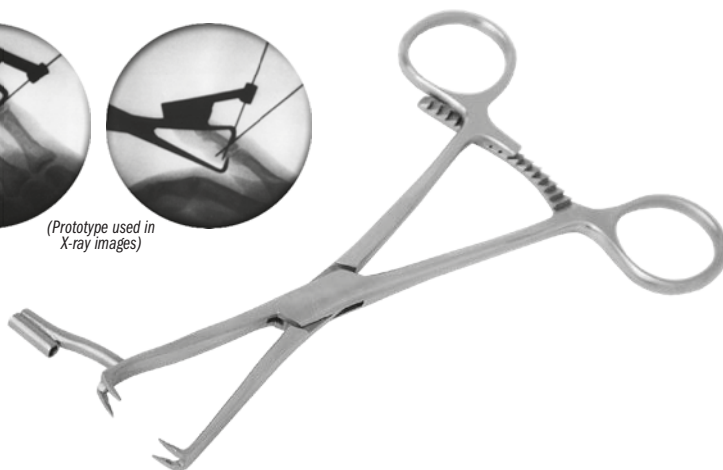

Chang Pin Clamp


Designed to allow accurate insertion of pins for internal fixation

Used for small bones, the clamp allows accurate insertion of pins for internal fixation. The cannula has a 1.8 mm internal diameter.

PRODUCT NO:

1760-01
Cannula Internal Diameter: 1.8 mm
Overall Length: 6" (15,2 cm)
Locking Ratchet Opens To: 25 mm

Designed by Win Chang, MD

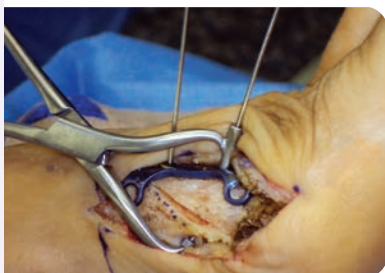

Ludloff/Mau Osteotomy Fixation Clamp

Used after lateral hallux valgus correction of the metatarsal, the clamp allows for osteotomy fixation and cannulated screw guide wire direction

Clamp fixates the osteotomy to hold the correction, and the 15° slanted cannulated k-wire guide allows the surgeon to place the guide wire for the cannulated screw perpendicular to the osteotomy for final fixation of the osteotomy.

PRODUCT NO:

1812
Cannula Accepts K-wire up to: .045" (1,1 mm)
Overall Length: 5" (12,7 cm)

Designed by A. Austin



Teurlings Medial Malleolar Clamp w/Wire Guide

Helps to stabilize the medial malleolar fragment during internal fixation

PRODUCT NO:

1803
Cannula Diameter: .062" (1,6 mm)
Overall Length: 5.25" (13,3 cm)

Designed by Luc Teurlings, MD



Desai Jones Fracture Reduction Clamp

Designed to reduce and maintain reduction of Jones fractures, helping to prevent distraction and/or rotation during wire, tap, and subsequent screw placement

Distally there are two k-wire holes for placement in the distal 5th metatarsal and the 2-pronged clamp proximally is placed on the tuberosity, allowing a "high and inside" screw placement without interference.

PRODUCT NO:



1802

Overall Length: 6" (15,2 cm)

Wire Block Length: 20 mm

Hole Separation: 5 mm on Center

Designed by Sarang Desai, DO

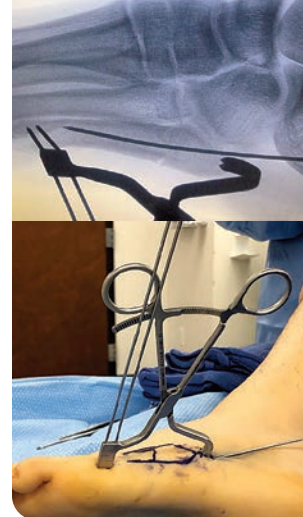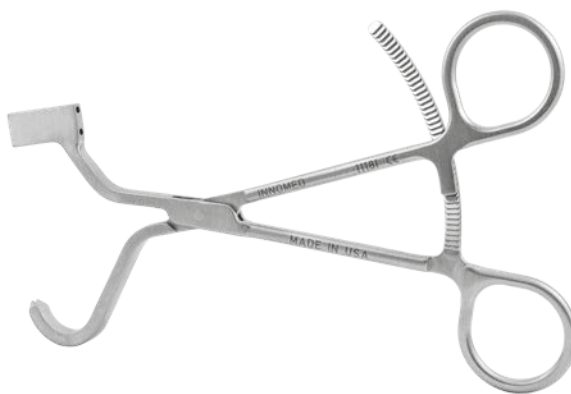

Durham Bone Reduction Clamps

Allows application of a bone plate without removing the reduction clamp

The standard clamp is designed for medium size bones such as the fibula, ulna, and radius. See page 166 for large clamp version.

The wide window directly above the jaws provide space to allow a bone plate to be slid into position without removing the clamp.


PRODUCT NO'S:

3652 [Standard]

Overall Length: 7.375" (18,7 cm)

3652-01 [Large with Speedlock]

Overall Length: 9.25" (23,5 cm)

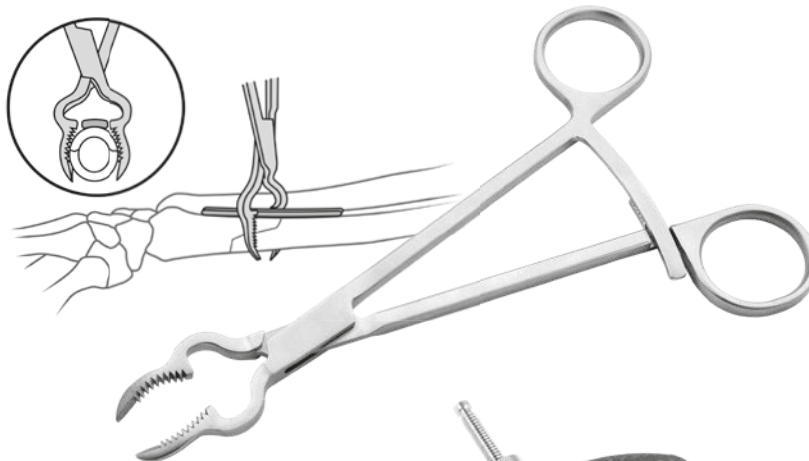

Radiolucent Small Bone Clamp

Can be kept in place while using image intensification or taking an x-ray

Carbon fiber material is strong, lightweight, completely radiolucent, can be steam sterilized, and helps to prevent from marring component surfaces.

PRODUCT NO:


1828

Overall Length: 7" (17,8 cm)



Duncan Metatarsal Clamp

Designed to be used on bones of the foot to stabilize an osteotomy or fracture in the corrected position for fixation through the opening in the top of the clamp



May also be used for open reduction internal fixation for hand or fibula procedures.

PRODUCT NO'S:

1638 [Large]

Overall Length: 7" (17,8 cm)

Clamp Pads: 1.3" x .625" (3,3 cm x 1,6 cm)

1638-25 [Medium]

Overall Length: 6.5" (16,5 cm)




Clamp Pads: 1" x .5" (2,5 cm x 1,3 cm)

1638-50 [Small]

Overall Length: 6.25" (15,9 cm)

Clamp Pads: .625" x .325" (1,6 cm x .8 cm)


Designed by
Gregory S. Duncan, DPM

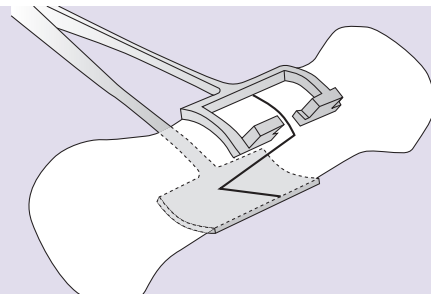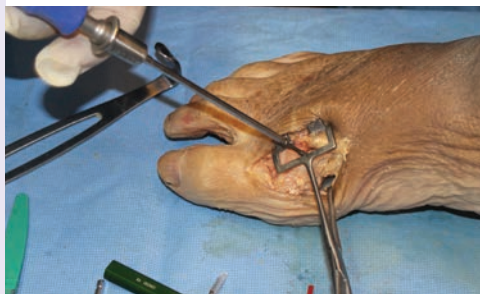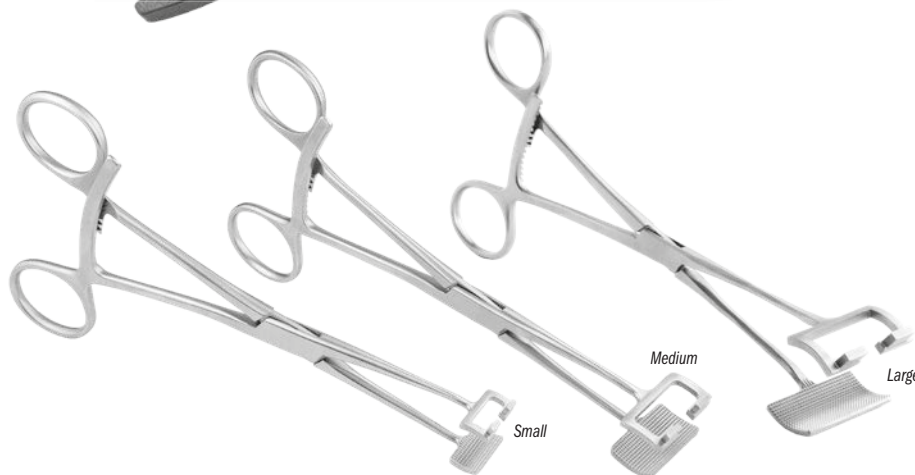



Percutaneous Achilles Repair Forceps for Limited Open Achilles Tendon Repair

Designed to help improve accuracy during percutaneous repair of Achilles tendon ruptures

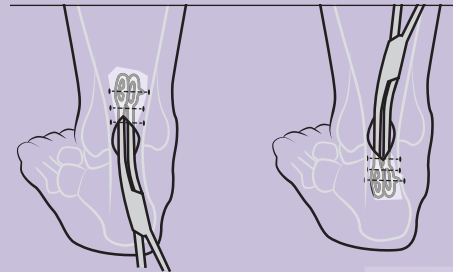

PRODUCT NO:

8235

Overall Length: 9.625" (24,4 cm)



Designed by James A. Amis, MD



Lateral Bump

The bump on the lateral side of each loop allows the surgeon to palpate the exact center of the loop, proximal to distal, and drop a needle just below (patient is prone) or anterior to the bump for the starting point, and aim to just below the bump on the opposite side



Medial Malleolar/Bone Fragment Clamps

Quick tightening & release low profile clamp with unlimited settings

PRODUCT NO'S:

1830 [Standard]
Overall Length: 5.5" (14 cm)
Clamp End Length: 1"

1835 [Medium]
Overall Length: 6" (15,2 cm)
Clamp End Length: 2"

1840 [Large]
Overall Length: 8" (20,3 cm)
Clamp End Length: 3"

Designed by Edward L. Sclamborg, MD

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY

Calvo Medial Malleolus Fracture Clamp

Designed to reduce and hold a displaced medial malleolus fracture

Also very useful in olecranon fractures.

PRODUCT NO'S:


1801-L [Left]

1801-R [Right]

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY



Designed by Ignacio J. Calvo, MD

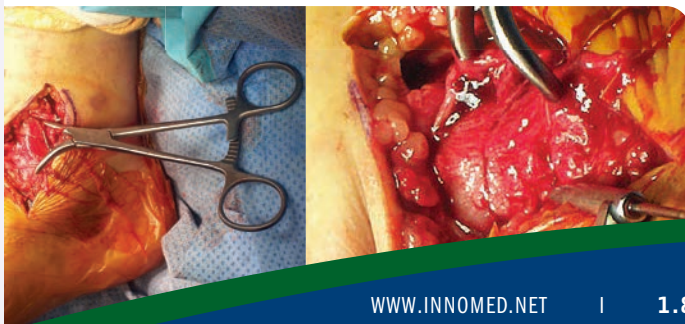

Small Bone Holding Forceps with Long Ratchet

Designed for use in stabilization of a fracture or osteotomy

PRODUCT NO:

1170

Overall Length: 5.75" (14,6 cm)

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY



O'Brien Bone Clamp

Designed for use in stabilization of a fracture or osteotomy

PRODUCT NO:

1816

Overall Length: 5.25" (13,3 cm)

USA MADE

Designed by Todd O'Brien, DPM



OrthoLucent O'Brien Bone Clamp

Designed for use in stabilization of a fracture or osteotomy

The carbon fiber PEEK material is strong, lightweight, completely radiolucent, can be steam sterilized, and helps to prevent from marring component surfaces.

PRODUCT NO:

1815-R

Overall Length: 5.25" (13,3 cm)

MADE EXCLUSIVELY
FOR INNOMED IN
SWITZERLAND

Designed by Todd O'Brien, DPM



Lewin Small Bone Clamp

PRODUCT NO:

4685

Overall Length: 5" (12,7 cm)

MADE FOR INNOMED IN
GERMANY



Stanton Articulating Small Bone Clamps

Opposing clamps facilitate manipulation of fracture ends

The small tube allows use of a towel clamp to compress non-union and shortening osteotomies during fixation, as well as to allow the use of Gelpi retractors to distract malunions during revision surgery.

PRODUCT NO'S:

1811-00 [Set of Left & Right]

Also available individually:

1811-L [Left]


Overall Length: 5.125" (13 cm)
Curved Plate Radius: 5 mm
Pin Hole for Pins Up To: 2,4 mm

1811-R [Right]

Overall Length: 5.125" (13 cm)
Curved Plate Radius: 5 mm
Pin Hole for Pins Up To: 2,4 mm


Designed by
John L. Stanton, MD


USA MADE

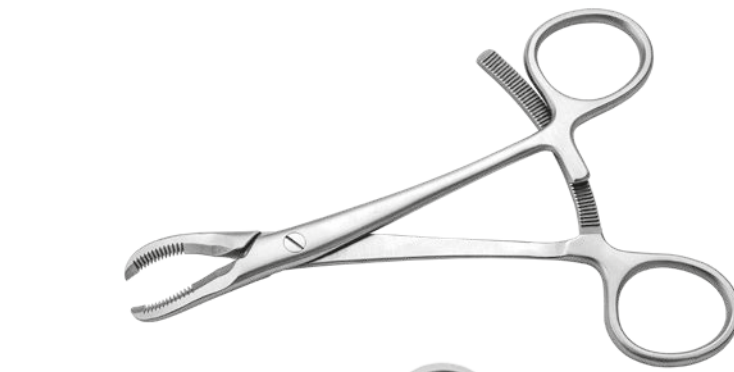

Compress with a towel clamp

Distract with a Gelpi retractor

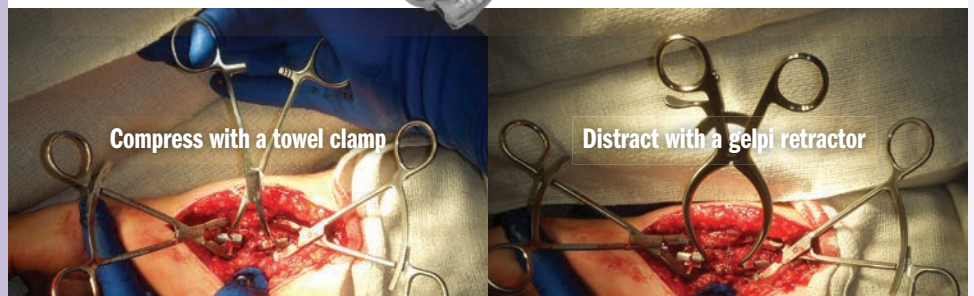


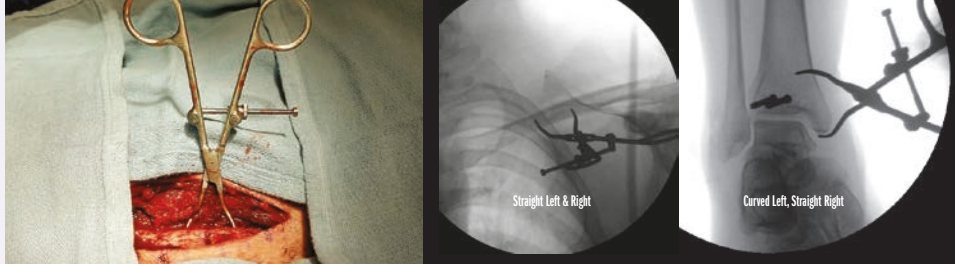


Pointed Fracture Reduction Clamps

Versatile set of fracture reduction clamps, each with a specific tine design that allows for appropriate vector placement so that anatomic reduction can be obtained in a number of different types of fractures

- ▶ 1.9 mm tines allow for a snug fit in 2 mm drill holes
- ▶ Tines angled to prevent clamp "slippage" with compression
- ▶ Straight tines can be placed deep within bone which allows for far cortex compression
- ▶ Clamps incorporate a box joint design that prevents clamp joint loosening and the need for tightening
- ▶ Example applications: any transverse fracture (straight-straight clamp), both bone forearm fractures, olecranon fractures, medial malleolus fractures, and many more
- ▶ Speed Lock Style: Extra-long spin down allows for increased range of clamp use, and open-topped joint rotates to allow for increased range of opening, and also allows for quick release

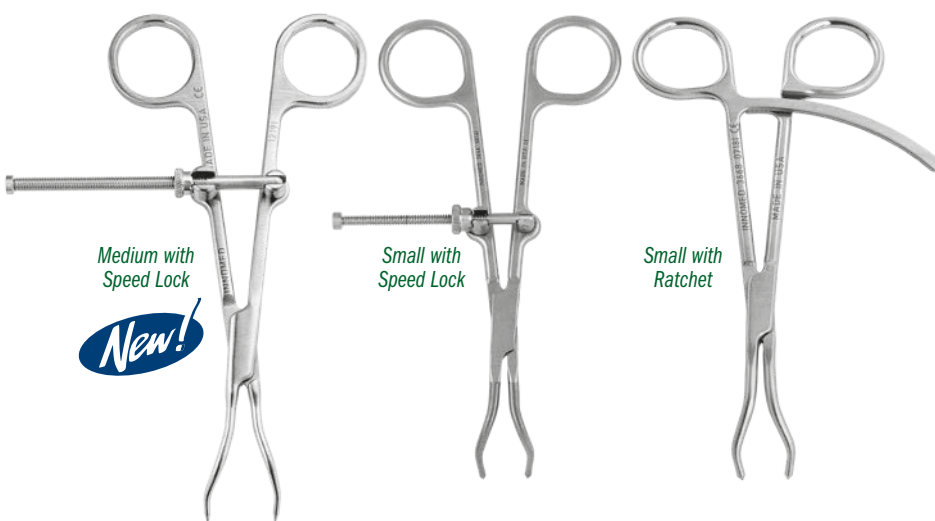

Each style available in four tine configurations

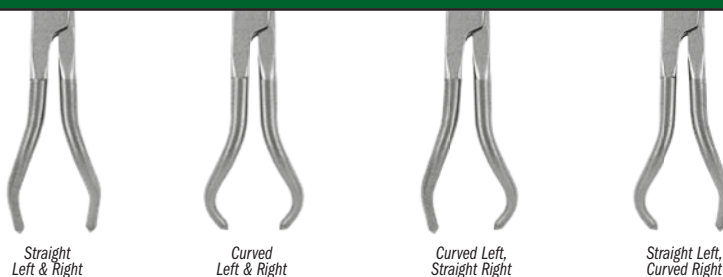

PRODUCT NO.'S:

SMALL WITH SPEED LOCK MECHANISM

3666 [Straight Left & Right]
Overall Length: 5.5" (14 cm)

3667 [Curved Left & Right]
Overall Length: 5.5" (14 cm)

3666-L [Curved Left, Straight Right]
Overall Length: 5.5" (14 cm)

3666-R [Straight Left, Curved Right]
Overall Length: 5.5" (14 cm)

MEDIUM WITH SPEED LOCK MECHANISM

3666-01 [Straight Left & Right]
Overall Length: 7" (17.8 cm)

3667-01 [Curved Left & Right]
Overall Length: 7" (17.8 cm)

3666-L-01 [Curved Left, Straight Right]
Overall Length: 7" (17.8 cm)

3666-R-01 [Straight Left, Curved Right]
Overall Length: 7" (17.8 cm)

SMALL WITH RATCHET MECHANISM

3668 [Straight Left & Right]
Overall Length: 5.5" (14 cm)

3669 [Curved Left & Right]
Overall Length: 5.5" (14 cm)


3668-L [Curved Left, Straight Right]
Overall Length: 5.5" (14 cm)

3668-R [Straight Left, Curved Right]
Overall Length: 5.5" (14 cm)



New!

Designed by Reza Firoozabadi, MD MA

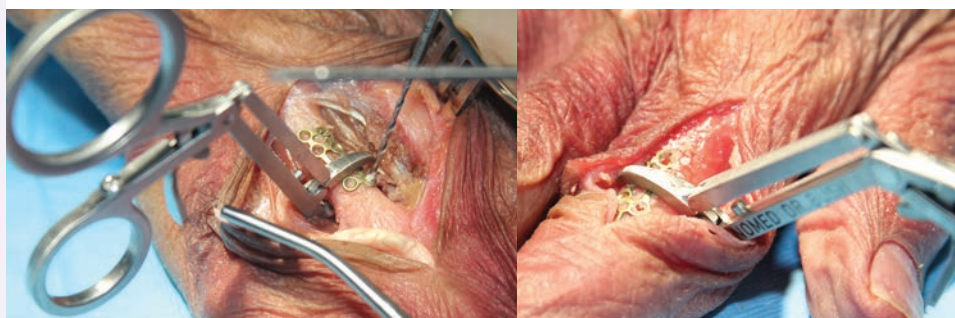

Bush Small Bone Reduction Forceps

Designed to help hold a small bone or bone plate in position for reduction and fixation

Opens to approximately .5" (13 mm).

PRODUCT NO.'S:

1888 [Double]
Overall Length: 4.5" (11.4 cm)
Jaw Width: .7" (17.7 mm)

1889 [Single]
Overall Length: 4.5" (11.4 cm)
Jaw Width: .15" (3.7 mm)

Designed by Andrew P. Bush, MD



Coated Allis Bone Clamps


A traditional Allis Bone Clamp designed with a longer ratchet—for a wider opening to allow a bone and plate to be clamped and locked onto—and coated end(s) to prevent from marring a component surface

PRODUCT NO'S:

1381 [One Coated End]
Overall Length: 6.125" (15,9 cm)
Ratcheted Clamp Opens to: 35 mm
Non-coated-end Width: 4 mm

1382 [Two Coated Ends]
Overall Length: 6.125" (15,9 cm)
Ratcheted Clamp Opens to: 35 mm
Non-coated-end Width: 4 mm

Modification of design by
Charles T. Resnick MD

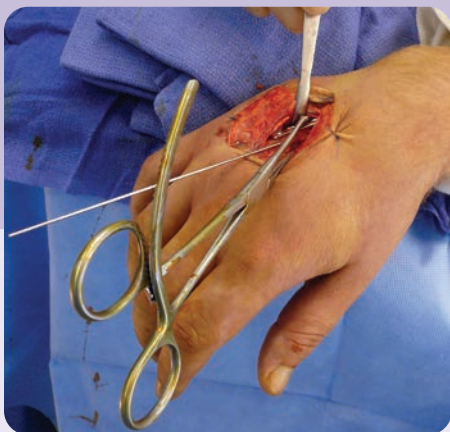

Resnick Allis Bone Clamp

A traditional Allis Bone Clamp designed with a longer ratchet which allows for a wider opening to allow a bone to be clamped and locked onto

PRODUCT NO:


1385
Overall Length: 6" (15,2 cm)
Ratcheted Clamp Opens to: 37 mm
Clamp End Width: 4.7 mm

Designed by Charles T. Resnick MD



Slavitt Phalangeal Forceps

Enables the surgeon to provide joint distraction and stability during joint placement at the base of the proximal phalanx of the lesser digits


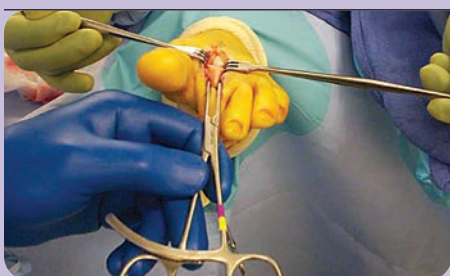


Helps to distract the joint and hold the bone, allowing easier access to the base. Can also be used for digital fusions to hold bones better for drilling and cutting applications.

PRODUCT NO:

1163
Overall Length: 6" (15,2 cm)
Clamp Internal Opening Diameter: 4 mm

Designed by
Jerome Slavitt, DPM

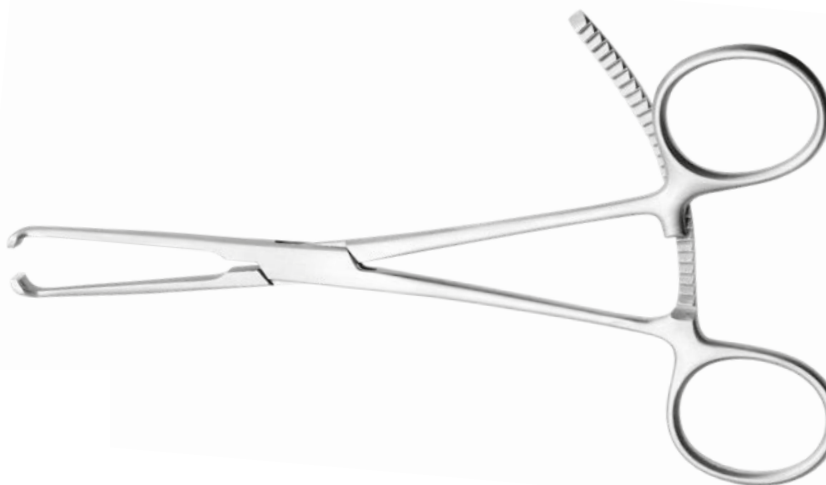

Rudisill Locking Small Bone Reduction Forcep

For reduction of hand phalanx and metacarpal fractures

PRODUCT NO:

2017

Overall Length: 4.875" (12,4 cm)

Designed by Ed Rudisill, MD



Lubahn Carpal/Tarsal Corkscrews

Designed to help with removal of carpal and/or tarsal bones

- ▶ Aids trapezium removal during basal joint arthroplasty when the bone is being removed as a unit
- ▶ Can also be used to facilitate a proximal row carpectomy as it fits the scaphoid, lunate, and triquetrum
- ▶ May additionally be used to remove the pisiform in cases of arthritis of the piso-triquetral joint

PRODUCT NO'S:

1191 [Standard]

Overall Length: 2.25" (5,7 cm)

1191-01 [Extended]

Overall Length: 6.5" (16,5 cm)

Designed by
John D. Lubahn, MD



New!

EXTENDED LENGTH VERSION

Evans Universal Carpal Tunnel Knife Guide

Designed to protect the median nerve while providing a choice of grooved tracks for a retrograde knife or for tenotomy scissors

Allows for smooth advance of the blade or scissors to divide the transverse carpal ligament. Designed for a mini-open, non-endoscopic approach.


PRODUCT NO:

1128

Overall Length: 8" (20,3 cm)

Blade Guide Widths: 2 mm and 5 mm

Designed by
Peter J. Evans, MD, PhD

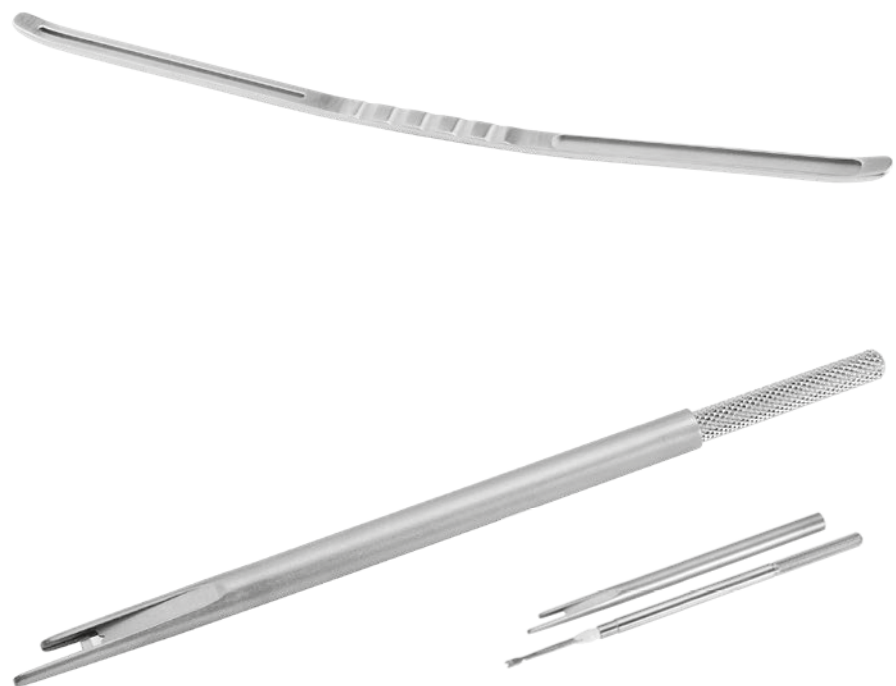

Hagan Carpal Tunnel Release Sleeve

Designed to protect the surrounding anatomy while providing a sleeve within which to smoothly advance a beaver-style blade to divide and release the transverse carpal ligament

Designed for use in a mini-open, non-endoscopic approach, the sleeve isolates the blade, providing protection to the surrounding anatomy. The longer, bottom leading edge of the sleeve is inserted between the median nerve and the transverse carpal ligament, while the shorter, top leading edge provides lifting protection to the structures above the ligament. The blade is then advanced within the sleeve to complete the ligament release.

Designed to use a Beaver-style Mini-Meniscus (Flat) 4 mm Blade. Blade not included.

PRODUCT NO:

1150

Overall Length: 5" (12,7 cm)

Designed by Hugh Hagan, MD





Durst Arthrodesis Retractor Set

Designed for exposure and retraction when performing arthrodesis of the MTP joint

PRODUCT NO'S:

1642-00 [Arthrodesis Retractor Set]

Also available individually:

1642-01 [Phalangeal Retractor]

Overall Length: 6.625" (16,8 cm)

1642-02 [Metatarsal Retractor]

Overall Length: 7" (17,8 cm)




Designed by Heiko Durst, MD



Metatarsal Retractor

One-step preparation and retraction of soft tissue around the head of the 1st metatarsal when performing arthrodesis of the MTP joint

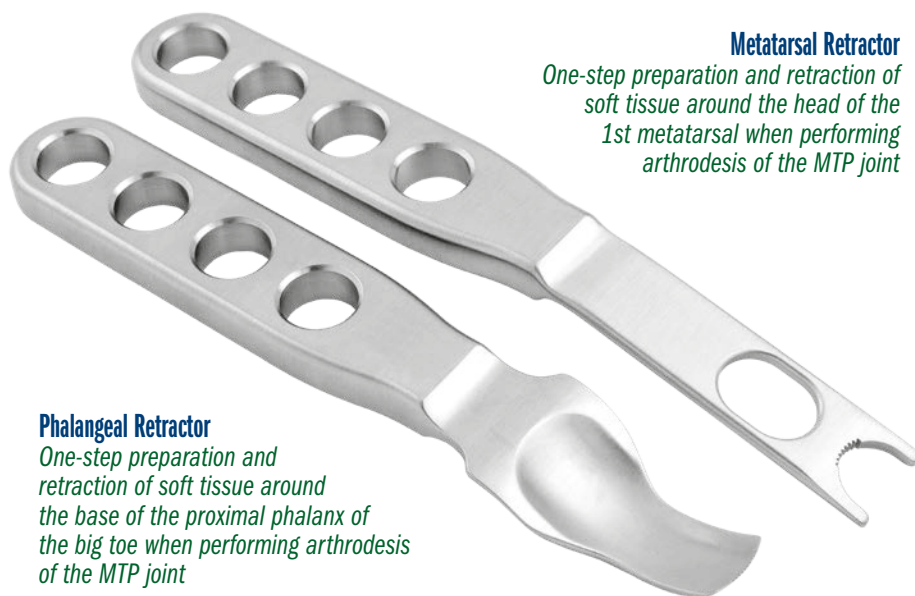

Phalangeal Retractor

One-step preparation and retraction of soft tissue around the base of the proximal phalanx of the big toe when performing arthrodesis of the MTP joint



Anderson Talar Neck Osteotomes

Designed to help improve range of motion and reduce pain caused by anterior bony impingement of the ankle by removing osteophyte from the anterior talar neck and the anterior distal tibia

PRODUCT NO'S:

5075

Gouge Width: 17 mm

Overall Length: 9.875" (25,1 cm)

Handle Length: 4.5" (11,4 cm)

5075-50

Gouge Width: 12.7 mm

Overall Length: 9.875" (25,1 cm)

Handle Length: 4.5" (11,4 cm)


5075-75

Gouge Width: 9.5 mm

Overall Length: 9.875" (25,1 cm)

Handle Length: 4.5" (11,4 cm)

Designed by John Anderson, MD

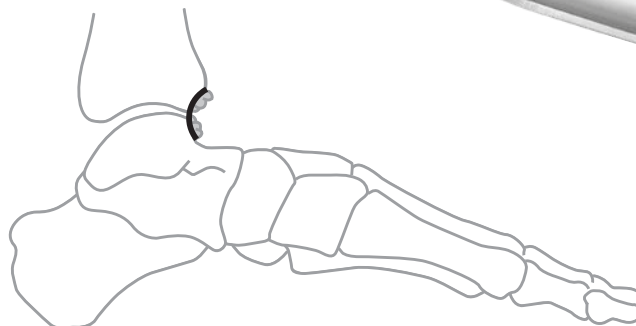



Desai Curette Osteotomes

Designed to remove bone and cartilage, helpful for preparing joint surfaces for fusion, allowing easy removal of osteophytes and cartilage without having to switch instruments

The osteotome portion also can be used to "feather" the subchondral surface to expose bleeding bone. It is also useful in instances of obtaining autograft, as it can be used to create a bone window and then remove cancellous bone.

PRODUCT NO'S:

5241 [5 mm]
Overall Length: 8.25" (21 cm)
Handle Length: 4.25" (10,8 mm)
Cup: 5 x 6 mm
Osteotome Width: 3.5 mm
Osteotome Length: 3.5 mm from edge of cup
5242 [8 mm]
Overall Length: 8.25" (21 cm)
Handle Length: 4.25" (10,8 mm)
Cup: 8 x 10 mm
Osteotome Width: 6.5 mm
Osteotome Length: 3 mm from edge of cup


Cup Sizes:

5 x 6 mm

8 x 10 mm



Designed by Sarang Desai, DO

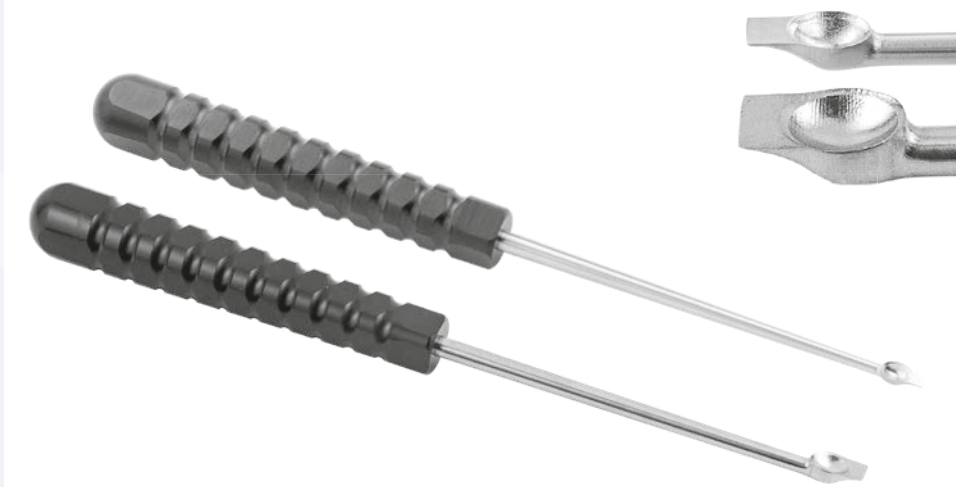

Hemisphere Curettes

Designed for small joint surgery

PRODUCT NO'S:

5345
Overall Length: 5.75" (14,6 cm)
Curette Diameter: 5 mm
5349
Overall Length: 5.75" (14,6 cm)
Curette Diameter: 9 mm

5 mm

9 mm



Designed by Richard Wittcock, DPM and Rob Baglio, DPM

Micro Curettes

Four cup sizes, straight or 45° angled-end shaft

Ultra hard titanium nitride coating helps to extend curette life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion.

PRODUCT NO'S:

Straight Micro Curettes

Overall Length: 9.75" (24,8 cm)
Shaft Length: 4.5" (11,4 cm)

4242 Cup Size 2

4240 Cup Size 1

4244 Cup Size 4/0

4246 Cup Size 6/0

Angled Micro Curettes


Overall Length: 9.75" (24,8 cm)
Shaft Length: 4.5" (11,4 cm)

4242-01 Cup Size 2

4240-01 Cup Size 1

4244-01 Cup Size 4/0

4246-01 Cup Size 6/0

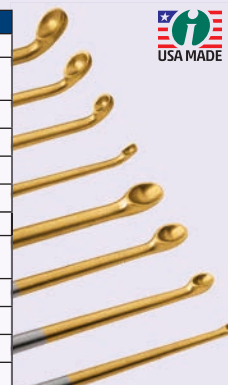

McGlamry Type Elevators

Designed to help deglove a metatarsal head, and helpful in many other procedures

PRODUCT NO'S:

1643-11 [11 mm]
Overall Length: 6.5" (16,5 cm)
1643-13 [13 mm]
Overall Length: 6.5" (16,5 cm)
1643-15 [15 mm]
Overall Length: 6.5" (16,5 cm)
1643-17 [17 mm]
Overall Length: 6.5" (16,5 cm)

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY

New!




Mazzara Rongeur with Small Pistol Grip Handle

Small pistol grip handle lessens hand fatigue and slippage, and allows for better visualization

PRODUCT NO'S:

1765-04
Jaw Bite: 2 x 10 mm
Overall Length: 9" (22,9 cm)
1765-05
Jaw Bite: 4 x 10 mm
Overall Length: 9" (22,9 cm)

Designed by James T. Mazzara, MD

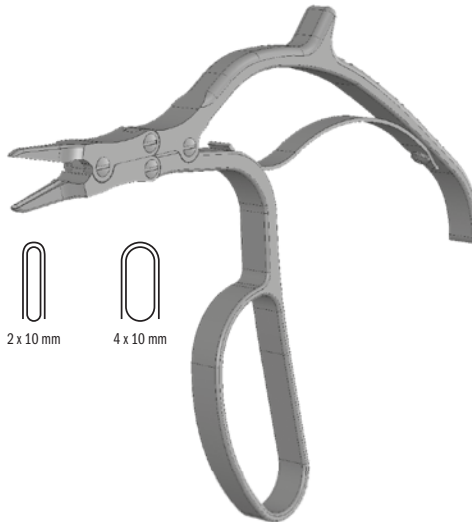

New!
AVAILABLE JUNE 2020

Yezerski Small Bone Rongeurs


Designed for small bone applications in the hand and foot

PRODUCT NO'S:

1789 [Small]
Overall Length: 7.125" (18,1 cm)
Jaw Width: 4 mm
Jaw Bite Width: 3 mm
Jaw Bite Length: 20 mm
1789-01 [Extra Small]
Overall Length: 4.5" (11,4 cm)
Jaw Width: Tapers from 4,6 mm to 2 mm
Jaw Bite Length: 11 mm



Designed by John Yezerski, MD

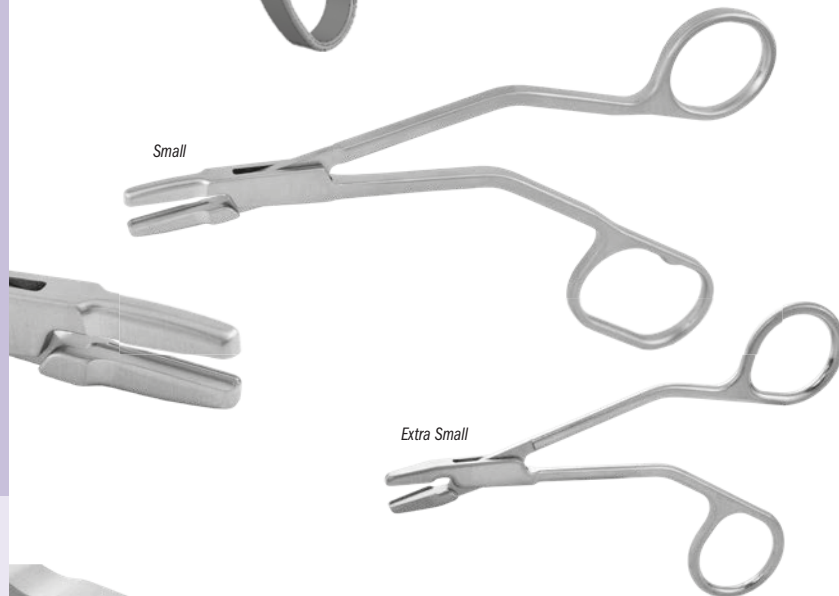

Macko Square Tipped Rongeur

Unique square tipped rongeur designed for Total Ankle Arthroplasty

Aggressive, low profile jaws aid in the removal of tibial bone in spite of limited space. The square ended tip helps produce a flat, finished surface following anterior talar facet reaming. Features such as the ergonomic grip, double action mechanism, long reach, and low profile make this rongeur also useful in spine, hip, and knee surgery. When used for morcelizing bone graft, the shallow, wide jaw helps avoid impaction.

PRODUCT NO'S:

1778-02
Jaw Bite: 7 x 18 mm
Overall Length: 10" (25,4 cm)
1778-03
Jaw Bite: 10 x 18 mm
Overall Length: 10" (25,4 cm)

Designed by Victor W. Macko, MD





Strayer Retractor

A lamina spreader with long thin blades designed to retract the soleus muscle and soft tissue for isolation and exposure of the gastrocnemius fascia for release

PRODUCT NO:

1869

Overall Length: 9.25" (23,5 cm)

Blade Length: 3.5" (8,9 cm)

Blade Width: .6" (1,5 cm)

Designed by Irvin Oh, MD



Desai Clearview Open Blade Self-Retaining Retractor

Open blade design allows clear visualization of soft tissue and neurovascular structures being retracted

Tapered blades allows 90° deep soft tissue retraction and easy insertion into the wound. The open blades also allow surgeon to work in open blade area, such as for gastroc recession surgery.

PRODUCT NO:

1858

Overall Length: 7.25" (18,4 cm)

Blade Depth: 3" (7,6 cm)

Blade Width: 1.25" (3,2 cm)

Designed by Sarang Desai, DO



Hendren Self-Retaining Retractor

Gentle on tissue and very effective in holding back subcutaneous fat

Designed to be gentle on tissue and very effective in holding back subcutaneous fat. Also useful for retracting the deltoid muscle firmly.

PRODUCT NO:

1745

Overall Length: 5.5" (14 cm)

Blade Size: 18 mm x 13 mm

Designed by D.H. Hendren, MD



Calibrated Ortho Spreader with Slotted Tips

A lamina spreader with a very thin closed profile, designed to enable distraction in tight spaces like the subtalar and talonavicular joints

PRODUCT NO:

1841

Overall Length: 6.75" (17,1 cm)
Prong Length: .5" (12,7 mm)
Calibrations: 10 mm to 35 mm

Designed by Jason Bariteau, MD



Calcaneal Spreader

Separates the calcaneal osteotomized bone for placement of tricortical bone graft

Pads have a large surface area, which easily separates the calcaneal osteo-tomized bone for placement of tricortical bone graft. Large pad surface area helps prevent the compression of soft calcaneal cancellous bone.

PRODUCT NO'S:

1880 [Smooth Pads]

Overall Length: 7" (17,8 cm)
Pad Dimensions: 15 mm x 12 mm


1881 [Grooved Pads]

Overall Length: 7" (17,8 cm)
Pad Dimensions: 15 mm x 12 mm

Designed by Michael Forness, DO



Smooth pads

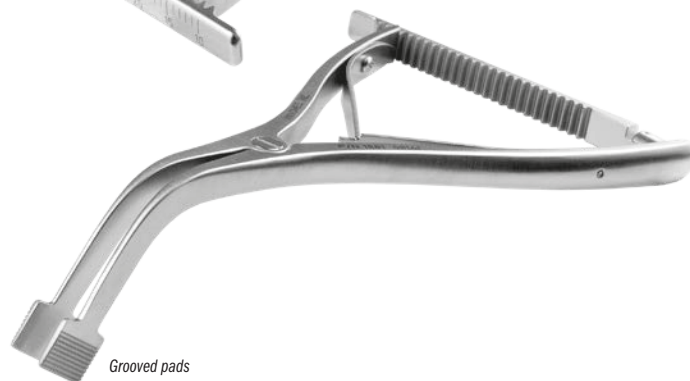

Grooved pads

Calcaneal Lateral Column Spreader


Used for lateral column lengthening of the calcaneus

PRODUCT NO:

1725

Pads: 14 mm x 12 mm
Arms Open to: 4,5 cm
Overall Length: 4.25" (10,8 cm)

Designed by K. Wapner, MD



Hendren Neuroma Retractor

Narrow tines are delicate on tissue, but sturdy enough to retract bone

Provides excellent exposure. Also helpful in scaphoid fracture repair surgery.

PRODUCT NO'S:

1680-02 [Large]


Overall Length: 5.5" (14 cm)

1680-01 [Small]

Overall Length: 4.25" (10,8 cm)

Designed by Douglas H. Hendren, MD





HFD Self-Retaining Small Bone Spreader

Versatile spreader featuring narrow tapered blades which, when together, make a small wedge to enter a tight bone interface or osteotomy

Blades feature a non-aggressive grip pattern that can be used when spreading apart bone as well as providing retraction of soft tissue in a smaller wound.


PRODUCT NO:

1829

Overall Length: 4.5" (11,4 cm)

Blade Depth: 28 mm

Blade Width Tapers from: 8 mm to 5 mm



Holiday Self-Retaining Carpal Tunnel Retractor


PRODUCT NO:

1113

Overall Length: 6" (15,2 cm)



Designed by Allan Holiday, MD



Burgess Carpal Tunnel Retractor

Designed for exposure during carpal tunnel surgery

PRODUCT NO:

1887

Overall Length: 4.25" (10,8 cm)

Blade Length: 12 mm

Blade Depth: 8 mm



Designed by Kraig Burgess, DO



Wilson Trigger Finger Retractor


PRODUCT NO:

1884

Overall Length: 4.25" (10,8 cm)

Blades: 6.5 mm Wide x 10 mm Deep

Designed by Ralph V. Wilson, MD



Joint, Calcaneal and Small Bone Compressor/Distractors with Speed Lock

Speed lock helps allow precise control and prevents unintended release

Two hole sizes allow for ease of pin size selection:
selection: .062" (1,6 mm) & .094" (2,4 mm)

PRODUCT NO'S:

CLOSED ARMS WITH SPEED LOCK

4216-LS [Large]

Holes Diameters: For .062" & .094"
(1,6 & 2,4 mm) K-wire Pins
Overall Length: 8" (20,3 cm)

4216-SS [Small]

Holes Diameters: For .062" & .094"
(1,6 & 2,4 mm) K-wire Pins
Overall Length: 6" (15,2 cm)

4216-XS [Extra Small]

Holes Diameters: For .062" & .094"
(1,6 & 2,4 mm) K-wire Pins
Overall Length: 4.5" (11,4 cm)

OUTSPREAD ARMS WITH SPEED LOCK & THUMBSCREWS


4217-LB [Large]

Holes Diameters: For .062" & .094"
(1,6 & 2,4 mm) K-wire Pins
Overall Length: 8" (20,3 cm)

CLOSED ARMS WITH SPEED LOCK & THUMBSCREWS

4217-SS [Small]

Holes Diameters: For .062" & .094"
(1,6 & 2,4 mm) K-wire Pins
Overall Length: 6" (15,2 cm)

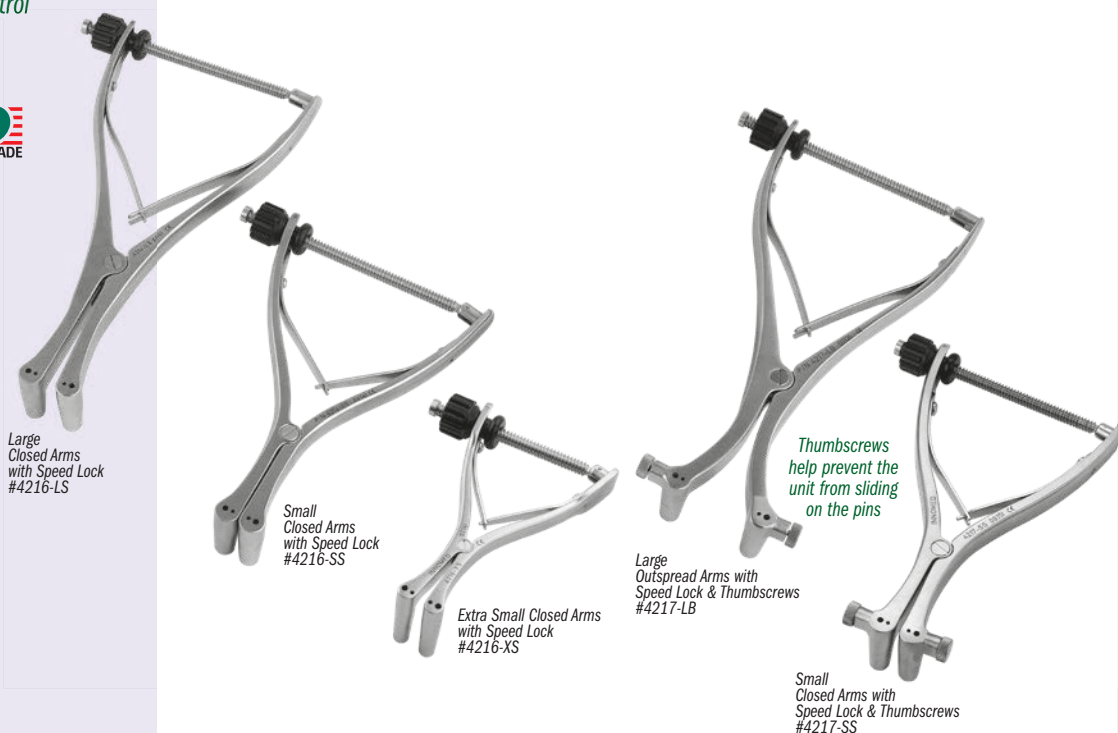

Joint, Calcaneal, Small Bone Compressor/Distractor

Selection lever switches the mechanism from compression to distraction


Simply squeeze the handle one time after direction selection to engage the mechanism.
Two hole sizes for pin size selection.



PRODUCT NO:

4865-LS [Standard]

Overall Length: 8.5" (21,6 cm)
Holes For: .062" & .094" (1,6 & 2,4 mm) K-wire Pins

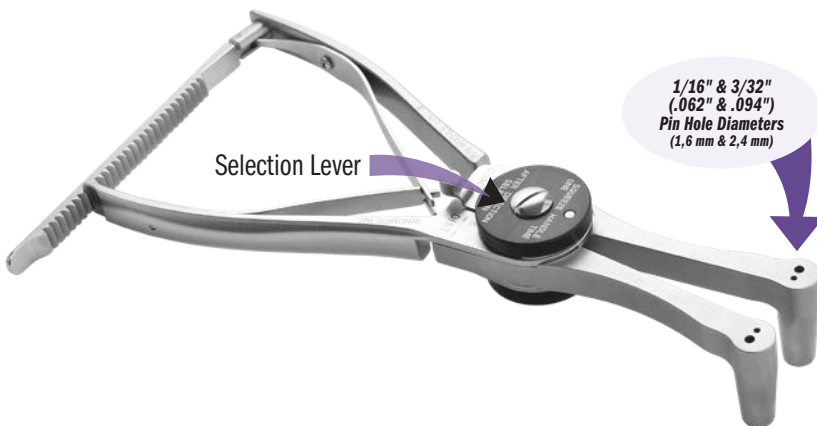

Joint, Calcaneal and Small Bone Compressors

Designed for compression in fracture and osteotomy procedures

Two hole sizes for ease of pin size selection:
.062" (1,6 mm) & .094" (2,4 mm)


PRODUCT NO'S:

4210-SC [Small]

Overall Length: 6" (15,2 cm)

4210-XSC [Extra Small]

Overall Length: 4.25" (10,8 cm)

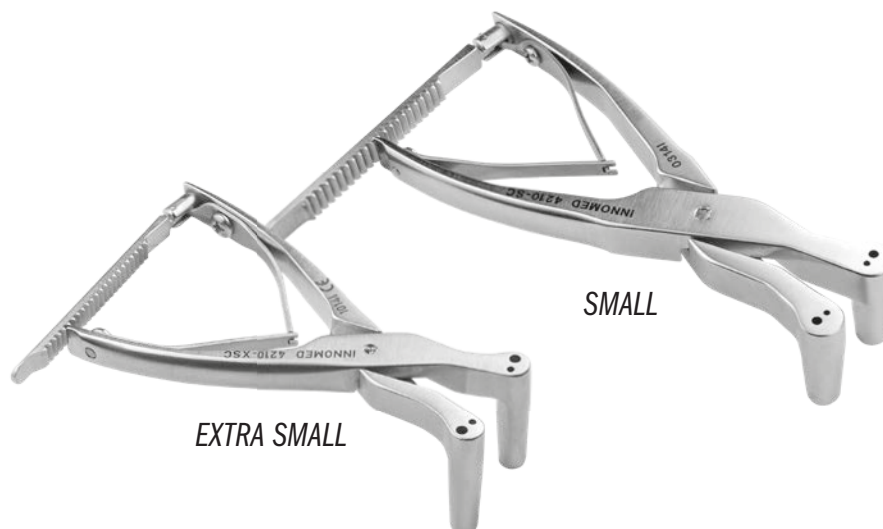

Joint, Calcaneal and Small Bone Distractors

Two hole sizes and two arm designs allow for easier pin size selection and helps with distraction in a variety of indications




PRODUCT NO'S:	
OUTSPREAD ARMS	
4210-LB [Large]	Holes Diameters: For .062" & .094" (1,6 & 2,4 mm) K-wire Pins Overall Length: 8" (20,3 cm)
4210-SB [Small]	Holes Diameters: For .062" & .094" (1,6 & 2,4 mm) K-wire Pins Overall Length: 6" (15,2 cm)
CLOSED ARMS	
4210-LS [Large]	Holes Diameters: For .062" & .094" (1,6 & 2,4 mm) K-wire Pins Overall Length: 8" (20,3 cm)
4210-SS [Small]	Holes Diameters: For .062" & .094" (1,6 & 2,4 mm) K-wire Pins Overall Length: 6" (15,2 cm)
4210-XSD [Extra Small]	Holes Diameters: For .062" & .094" (1,6 & 2,4 mm) K-wire Pins Overall Length: 4.25" (10,8 cm)



Large Pin Distractor and Compressor

Larger 1/8" (3,2 mm) pin hole size for extra sturdy distraction or compression

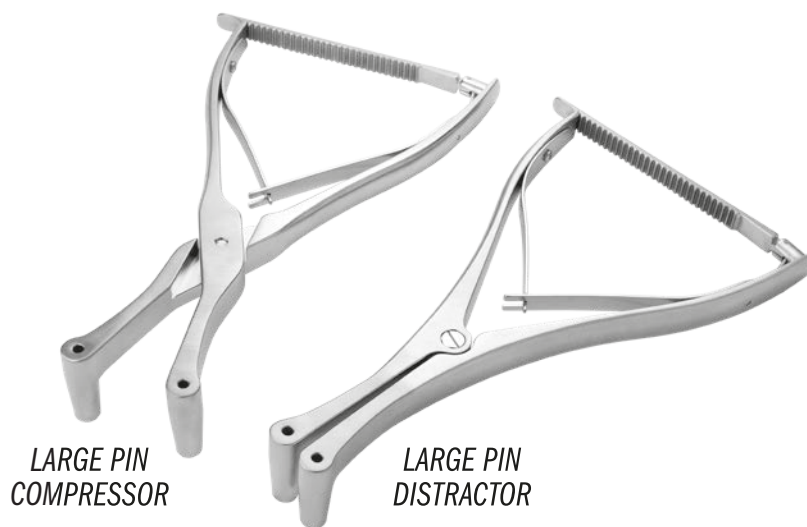

PRODUCT NO'S:	
4233 [Large Pin Distractor]	Hole Diameters: For .125" (3,2 mm) K-wire Pins Overall Length: 8" (20,3 cm)
4234 [Large Pin Compressor]	Hole Diameters: For .125" (3,2 mm) K-wire Pins Overall Length: 8" (20,3 cm)



Joint, Calcaneal and Small Bone Distractors with Thumbscrews

Thumbscrews help prevent the unit from sliding on the pins



PRODUCT NO'S:	
OUTSPREAD ARMS	
4215-LB [Large]	Holes Diameters: For .062" & .094" (1,6 & 2,4 mm) K-wire Pins Overall Length: 8" (20,3 cm)
4215-SB [Small]	Holes Diameters: For .062" & .094" (1,6 & 2,4 mm) K-wire Pins Overall Length: 6" (15,2 cm)
CLOSED ARMS	
4215-LS [Large]	Holes Diameters: For .062" & .094" (1,6 & 2,4 mm) K-wire Pins Overall Length: 8" (20,3 cm)
4215-SS [Small]	Holes Diameters: For .062" & .094" (1,6 & 2,4 mm) K-wire Pins Overall Length: 6" (15,2 cm)



Thumbscrew Modification Designed by Kelly McCormick, MD

Gurbani Joint Distractor/Compressor

Versatile joint distractor/compressor provides 360° freedom for arthroscopic or open procedures of foot, ankle, hand, and wrist joints

The surgeon puts the pins in the bone, then slides the holes of the device over the pins and distracts or compresses—the device can be locked in either direction. Especially useful for arthroscopy of subtalar, talo-navicular, calcaneocuboid, and wrist joints. The T-wrench helps provide precise, controlled manipulation.

Pin Hole Sizes: .15" (3,5 mm) and .182" (4,5 mm)

PRODUCT NO'S:

4208-00 [Set]

Includes: Distractor/Compressor, T-Wrench, and Case

Available individually:

4208-01 [Distractor/Compressor Only]

Dimensions: 6" w x 5" h (15,2 cm x 12,7 cm)


Distracts up to: 3" (7,6 cm) / Compresses down to: .5" (1,3 cm)

4208-TW [T-Wrench]

Dimensions: 3" w x 3" h (7,6 cm x 7,6 cm)

1025 [Sterilization Case]

Designed by Naren G. Gurbani, MD

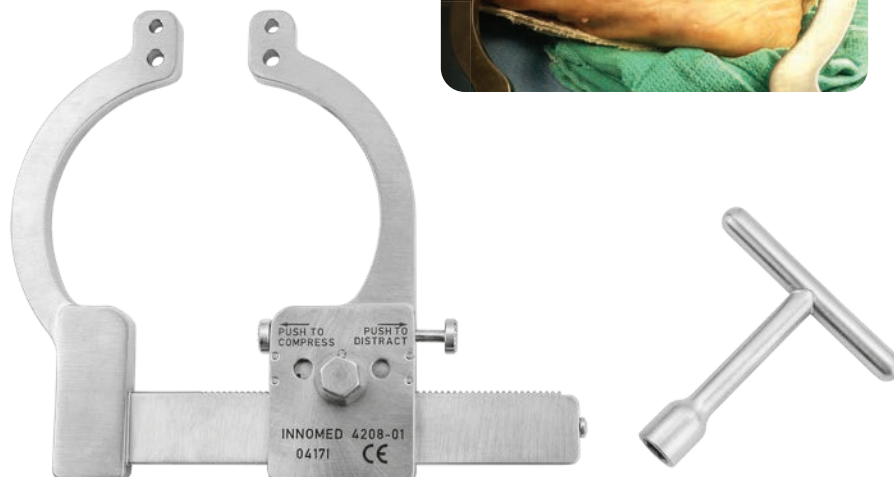

Ortho Self-Retaining Retractor with Pin Guides

Designed for small joint use with pin guides that are set back to allow either direct distraction or distraction with pins

- ▶ Parallel pin guides allow pins up to 2 mm
- ▶ Serrated outside blades extend .4" (1 cm) beyond end of guides
- Uses include:
 - ▶ Osteotomy distraction (such as the Evans or Cotton in the foot)
 - ▶ Joint distraction for arthodesis or lengthening applications
 - ▶ Fracture distraction

PRODUCT NO:

1842-02

Overall Length: 6.5" (16,5 cm)

Blade Width: 7 mm

Blade Extension (beyond guides): .4" (1 cm)

Blade Thickness: 1.68 mm

Pin Guide Length: 1.25" (3,2 cm)

Pin Guide Internal Diameter: .085" (2,1 mm)

Designed by
Sean Dunn, DPM



Weinraub Joint and Calcaneal Spreader

Designed to assist in the opening of small joints of the hand and foot for the application of fusion and graft techniques

Provides excellent joint exposure without blocking intra-articular or osteotomy access. Helps prevent slippage or falling out of the joint by placing the arms on either side of the area to be distracted, driving two pins and opening the joint.

PRODUCT NO'S:

Overall Length: 7" (17,8 cm)


1870 Up to .062" (1/16") (1,6 mm) Pin Diameter

1872 Up to .11" (7/64") (2,8 mm) Pin Diameter

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY

Designed by Glenn M. Weinraub DPM, FACFAS

**ORIGINAL
DESIGN!**

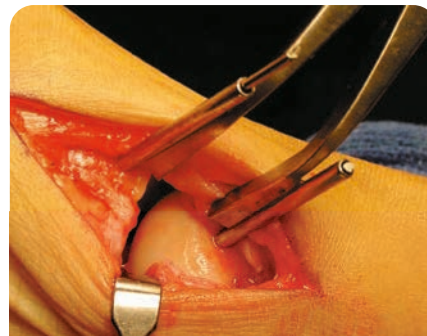

HFD Compressor/Distractors - Small

Dial mechanism helps allow precise control of inserted wires in small bone surgery—for maintaining a position, compressing or distracting

- ▶ Two hole sizes allow for ease of pin size selection: .045" (1,1 mm) & .062" (1,6 mm)
- ▶ A .125" (3,2 mm) pin can be used in the holes of the thumbwheel for leverage.
- ▶ Radiolucent arms are a PEEK/Carbon Fiber composite.
- ▶ Both models are steam sterilizable.

PRODUCT NO'S:

1834 [All Stainless Steel]
Dimensions: 50 mm x 55 mm

1834-R [With Radiolucent Arms]
Dimensions: 50 mm x 55 mm



Radiolucent arms

HFD Compressor/Distractor - Large

Dial mechanism helps allow precise control of inserted wires—for maintaining a position, compressing or distracting

- ▶ Two hole sizes allow for ease of pin size selection: .082" (2,0 mm) & .125" (3,2 mm)
- ▶ A .125" (3,2 mm) pin can be used in the holes of the thumbwheel for leverage.
- ▶ Radiolucent arms are a PEEK/Carbon Fiber composite.
- ▶ Both models are steam sterilizable.

PRODUCT NO'S:

1836 [All Stainless Steel]
Overall Length: 4" (10,2 cm)
Maximum Arm Opening: 2.25" (5,7 cm)

1836-R [With Radiolucent Arms]
Overall Length: 4" (10,2 cm)
Maximum Arm Opening: 2.25" (5,7 cm)



Radiolucent arms

Wurapa Small Joint Compressor and Distractor

Designed to allow one-handed manipulation and deployment once fixation pins are placed

Pins should be cut short above the pin guides to allow full access to the operative site.

Designed to simplify several small joint procedures:

- ▶ Preparation of small bone non-unions before bone grafting and fixation
- ▶ Preparation of small joints for arthrodesis (e.g. partial wrist fusion)
- ▶ Distract and better evaluate small joints before determining final management
- ▶ Useful for intercarpal stabilization while performing ligament reconstructions (e.g. scapholunate ligament repair/reconstruction)

PRODUCT NO'S:

Double .045" (1,1 mm) & .062" (1,6 mm) Holes

1751 [Compressor]
Compresses From: 28 mm
Overall Length: 4.625" (11,7 cm)

1752* [Distractor]
Distracts to: 46 mm
Overall Length: 4.625" (11,7 cm)

Single .045" (1,1 mm) Hole

1753 [Compressor]
Compresses From: 28 mm
Overall Length: 4.5" (11,4 cm)

1754 [Distractor]
Distracts to: 46 mm
Overall Length: 4.5" (11,4 cm)

Designed by Raymond K. Wurapa, MD

Available with two hole sizes on each instrument!






MADE EXCLUSIVELY FOR INNOVEM IN GERMANY



Double Holes

Single Hole

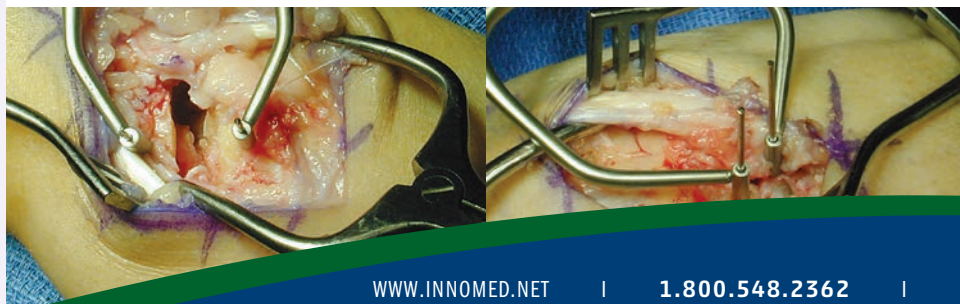

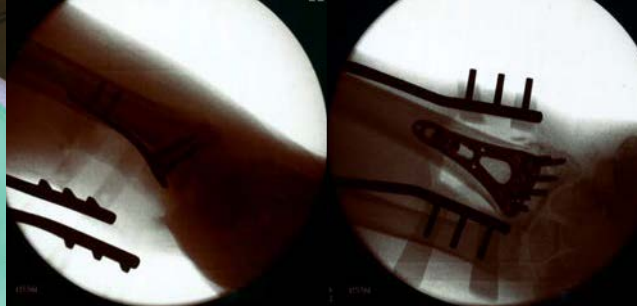

Dodson Modular Retractor

Designed to help expose a small to medium size bone for internal fixation—can be used for distal radius, ulna, humerus, and fibula fractures

Allows the limb to be rotated (pronated or supinated) without loss of exposure. The hohmann retractors have three hole sizes which allow for a variety of positioning angle options using the teeth of the self-retaining retractor, or can also be positioned in-between the teeth. The hohmann is placed around the bone, and thus reduces the force on the soft tissues while increasing exposure. Can be used in the forearm to treat radius and ulna shaft fractures, humerus fractures, as well as in the leg for fibula fractures.

Set consists of one self-retaining retractor, two stainless steel mini-hohmann retractor blades, and a sterilization case. Radiolucent mini-hohmann retractor blades are optional.

PRODUCT NO:

1838-00 [Set]

Included in Set / Replacement Parts:

1838-01 [Retractor Only]

Overall Length: 5.5" (14cm)

1838-02 [Stainless Steel Blade Only – One]

Two included in set, one with this product number

Overall Length: 5.25" (13.3cm)

Blade Width: 3/8" (9mm)

1025 [Sterilization Case Only]

Optional Parts:

1838-02R* [Radiolucent Blade Only – One]

Overall Length: 5.25" (13.3cm)

Blade Width: 3/8" (9mm)

Designed by Mark A. Dodson, MD

US Patent No. 9,161,745 B2

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY

* MADE EXCLUSIVELY
FOR INNOMED IN
SWITZERLAND



Optional radiolucent carbon fiber PEEK composite blade

The radiolucent blade is made of a strong, lightweight carbon fiber PEEK composite material, which is completely radiolucent, helps to prevent from marring component surfaces, and can be steam sterilized.



Chung Weitlaner Retractor

Longer prongs allow use in a small, but deep wound



Prong lengths of 25 mm and 30 mm available with either sharp or blunt tips

PRODUCT NO'S:

Designed by Raymond Chung, MD

Blunt Tips

5065 [2x3 Prongs]

Blade Depth: 25 mm

Overall Length: 4.5" (11.4 cm)

5065-01 [3x4 Prongs]

Blade Depth: 25 mm

Overall Length: 4.5" (11.4 cm)

5067 [2x3 Prongs]

Blade Depth: 30 mm

Overall Length: 4.5" (11.4 cm)

5067-01 [3x4 Prongs]

Blade Depth: 30 mm

Overall Length: 4.5" (11.4 cm)

Sharp Tips

5066 [2x3 Prongs]

Blade Depth: 25 mm

Overall Length: 4.5" (11.4 cm)

5066-01 [3x4 Prongs]

Blade Depth: 25 mm

Overall Length: 4.5" (11.4 cm)

5068 [2x3 Prongs]


Blade Depth: 30 mm

Overall Length: 4.5" (11.4 cm)

5068-01 [3x4 Prongs]

Blade Depth: 30 mm

Overall Length: 4.5" (11.4 cm)

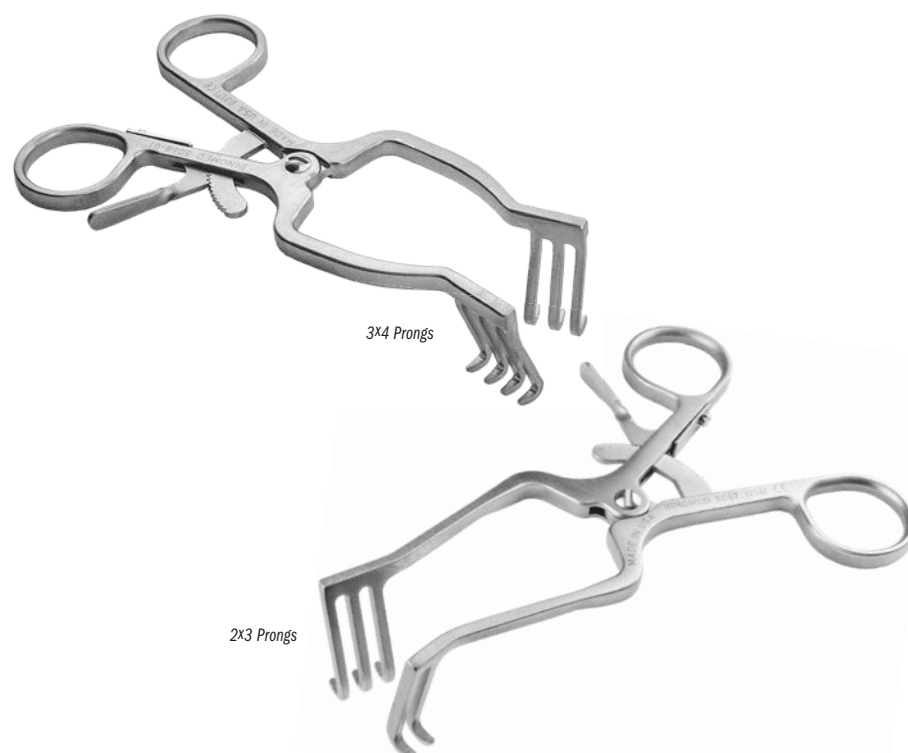

3x4 Prongs

2x3 Prongs



Wurapa Swivel Blade Forearm Retractor

Designed for forearm and wrist fracture exposure, the blades swivel for less stress on soft tissue

Swivel-blade technology helps to allow parallel deployment of retractor blades to maximize wound exposure and minimize edge loading on surrounding soft tissues. Parallel deployment of the retractor blades also helps prevent rotation and migration of the retractor during a procedure.

PRODUCT NO'S:

1646-00 [Set]
Includes Retractor and Two Swivel Blades



Also available individually:

1646-01 [Retractor]
Overall Length: 5.125" (13 cm)
Opens to: 2.5" (6.4 cm)

1646-02 [Swivel Blade]
One blade with this product number, two included in set
Width: .9375" (24 mm)
Depth: .75" (19 mm)



Designed by Raymond Wurapa, MD

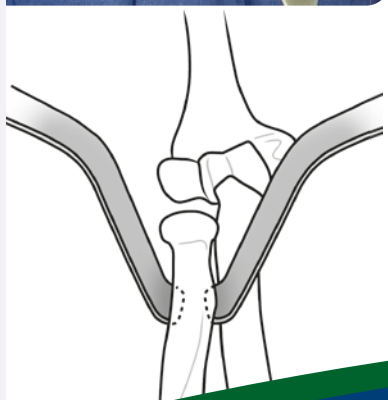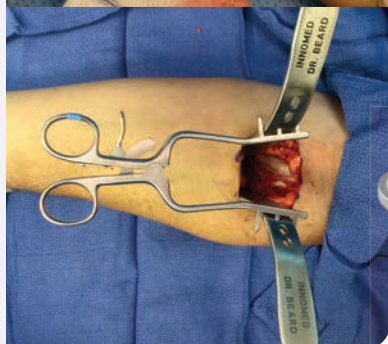

Williams Distal Radius Fracture Retractor

Designed to provide excellent exposure during fracture reduction and plating

Long straight arms allow parallel retraction of the incision, while the deep blades with a pronounced distal "curl" help maintain soft tissue retraction.

The solid, concave ulnar blade helps prevent soft tissue from being captured by the drill bit when drilling the ulnar holes, and helps to protect the median nerve and flexor tendons.

The radial side blade is a deep blunt tip Wietlaner-style.

Two .045" (1.1 mm) guidewire holes are attached to the arms just proximal to both blades. The holes are angled in slightly varying directions to allow choice of placement of stabilizing pins into the distal radius to prevent rotation or migration of the retractor.



PRODUCT NO'S:

1837-L [Left]
For Pins up to .045" (1.1 mm)
Overall Length: 4.5" (11.4 cm)
Blade Depth: 20 mm
Blade Width: 12.5 mm

1837-R [Right]
For Pins up to .045" (1.1 mm)
Overall Length: 4.5" (11.4 cm)
Blade Depth: 20 mm
Blade Width: 12.5 mm

Designed by Craig S. Williams, MD and Eric Dahlinger

Beard Distal Bicep Retractor

Designed to help optimize surgical exposure during anterior single incision distal biceps tendon reinsertion

The blade design features an anatomically contoured distal end to hug the radius cortex. The smooth distal end helps to avoid deep penetration, and the width matches the width of the distal biceps tendon insertion site. The narrow curved handle design helps to optimize workspace and visualization. Sold as a set, or available individually for replacement.

PRODUCT NO'S:

5834-00 [Set – Retractor & Two Blades]

Available Individually:

5834-01 [Blade] 1 blade with this product number
Overall Length: 6.375" (16.2 cm)
Width: .625" (16 mm)

5834-02 [Self-retaining Retractor]
Overall Length: 7.5" (19.1 cm)



Designed by David Beard, MD



Faillace Ambidextrous Self-Retaining Retractor

Handle can be rotated away from the surgeon after insertion if desired

PRODUCT NO'S:

1580 [7 Teeth]
Overall Length: 7.5" (19,1 cm)
Prong Depth: 38 mm
Prong Width: 34 mm

1579 [4 Teeth]
Overall Length: 6" (15,2 cm)
Prong Depth: 38 mm
Prong Width: 18 mm


1579-01 [Small – 4 x3 Teeth]
Overall Length: 5.25" (13,3 cm)
Prong Depth: 20 mm
Prong Width: 18 mm / 13 mm

Designed by
John J. Faillace, MD



ChungT-Handle Retractors

Designed with a T-handle for easier holding and to help reduce finger and thumb fatigue

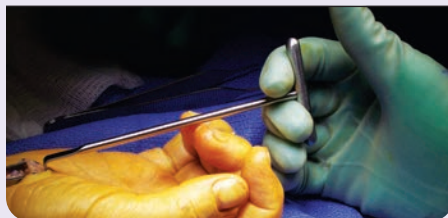

PRODUCT NO'S:

1159 [Sharp Rake]
Overall Length: 4.625" (11,7 cm)
Blade Width: 9 mm
Blade Depth: 7 mm

1161 [Blunt Rake]
Overall Length: 4.625" (11,7 cm)
Blade Width: 9 mm
Blade Depth: 7 mm


1162 [Senn]
Overall Length: 4.625" (11,7 cm)
Blade Width: 6 mm
Blade Depth: 16 mm

1159-01 [Extended Sharp Rake]
Overall Length: 5.625" (14,4 cm)
Blade Width: 9 mm
Blade Depth: 7 mm


1161-01 [Extended Blunt Rake]
Overall Length: 5.625" (14,4 cm)
Blade Width: 9 mm
Blade Depth: 7 mm

1162-01 [Extended Senn]
Overall Length: 5.625" (14,4 cm)
Blade Width: 6 mm
Blade Depth: 16 mm


Designed by
Raymond Chung, MD




Standard Shaft

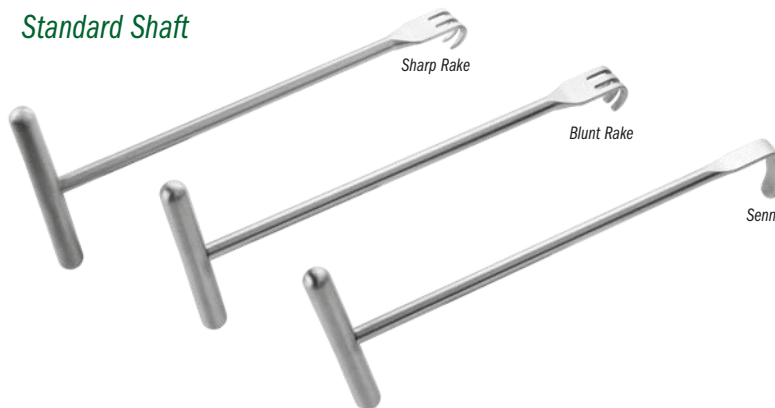

Extended Shaft

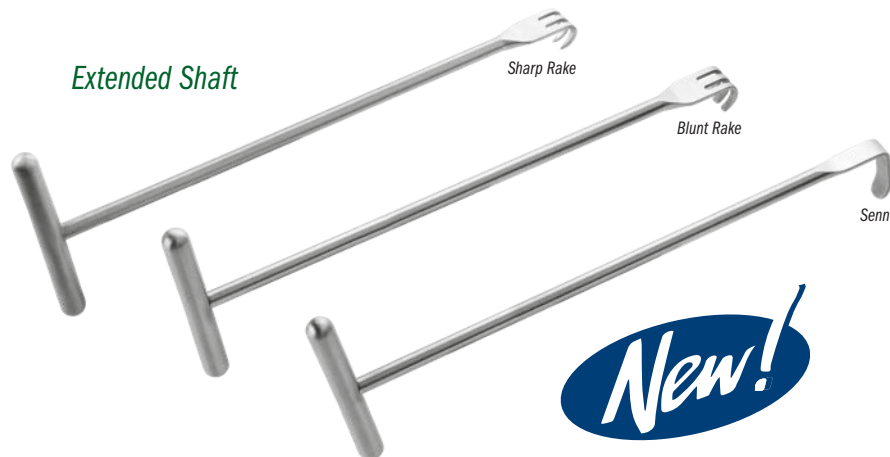

New!

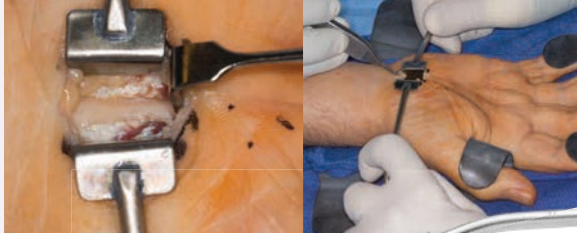

Kakar Carpal Tunnel Retractors

Designed for maximum ergonomic positioning and soft tissue retraction to permit release of the transverse carpal ligament through a mini open technique

PRODUCT NO'S:

1126 [Small]
Overall Length: 6" (15,2 cm)
Blade: 15 mm Wide x 11 mm Tall

1127 [Large]
Overall Length: 6" (15,2 cm)
Blade: 20 mm Wide x 15 mm Tall

Designed by
Sanj Kakar, MD



SMALL BONE

Modified Mini Hohmann Retractors

Used for small bone surgery



Designed by Jeffrey Lawton, MD


PRODUCT NO'S:

1665 [Narrow, Deep]
Overall Length: 5.875" (14,9 cm)
Blade Width: 6 mm
Blade Drop: 35 mm

1665-01 [Narrow, Short]
Overall Length: 5.5" (14 cm)
Blade Width: 6 mm
Blade Drop: 17 mm

1666 [Wide, Deep]
Overall Length: 5.875" (14,9 cm)
Blade Width: 8 mm
Blade Drop: 35 mm

1666-01 [Wide, Short]
Overall Length: 5.5" (14 cm)
Blade Width: 8 mm
Blade Drop: 17 mm



OrthoLucent™ Mini Hohmann Retractors

Radiolucent, lightweight retractors



The carbon fiber PEEK material is strong, lightweight, completely radiolucent, can be steam sterilized, and helps to prevent from marring component surfaces.

Designed by Jeffrey Lawton, MD

PRODUCT NO'S:

1594-R [8 mm Blade]
Overall Length: 6.875" (17,5 cm)
Blade Width: 8 mm

1597-R [16 mm Blade]
Overall Length: 6.875" (17,5 cm)
Blade Width: 16 mm

1597-R [16 mm Blade]
Overall Length: 6.875" (17,5 cm)
Blade Width: 16 mm



J.B. Redler Retractor

Uniquely balanced retractor for bone exposure for a multitude of upper extremity procedures

Double-angle design allows for ideal exposure with minimal effort to hold the retractor, while the assistant's hands are well out of the way of the exposure. The aperture in the base of the handle allows the retractor to be attached to a Penrose drain to the table for hands-free approach.

PRODUCT NO:

1645
Overall Length: 5" (12,7 cm)

Designed by M.R. Redler, MD



SMALL BONE

K-Wire Bender/Cutter

Designed to bend a K-wire while extending from bone without applying mechanical strain

The K-wire only needs to extend 20 mm from the skin surface to be bent.

PRODUCT NO:

2111


Overall Length: 6.5" (16,5 cm)



Can bend and cut K-wires measuring 1 to 1.6 mm (.039-.062") in diameter

1 and 1.2 mm
1.2 and 1.6 mm

The right slot of the instrument's lower jaw can hold K-Wires with a diameter of 1.2 mm or 1.6 mm. The smaller left slot can hold K-Wires measuring 1 mm or 1.2 mm in diameter.



Bending

With the jaw of the instrument opened wide, the K-Wire is inserted from the side into one of the slots of the lower jaw. During bending, the K-Wire is forced backwards by the nose of the upper jaw and guided by a small groove.

Cutting

The K-Wire is inserted into the cutting groove and the bender/cutter cuts by shearing (like a cigar cutter), not crushing. The result is a clean and burr-free cut surface.



Wire Bender

Designed to bend wire up to .062"/1.6 mm

PRODUCT NO:

2024

Overall Length: 5.5" (14 cm)



Pin Puller - Small

Small size allows for use in a small incision to help with removal of a 2 mm or smaller k-wire pin

PRODUCT NO:

3033

Overall Length: 6.5" (16,5 cm)
Jaw Width: 6,2 mm tapering to 3 mm at end
Jaw Height: 11,7 mm



Stanton Bent Pin Removal Pliers


PRODUCT NO:

1894

Overall Length: 6.5" (16,5 cm)
Jaw Length: 1.65" (4,2 cm)
Instrument Width: 1 cm

Designed by John Stanton, MD



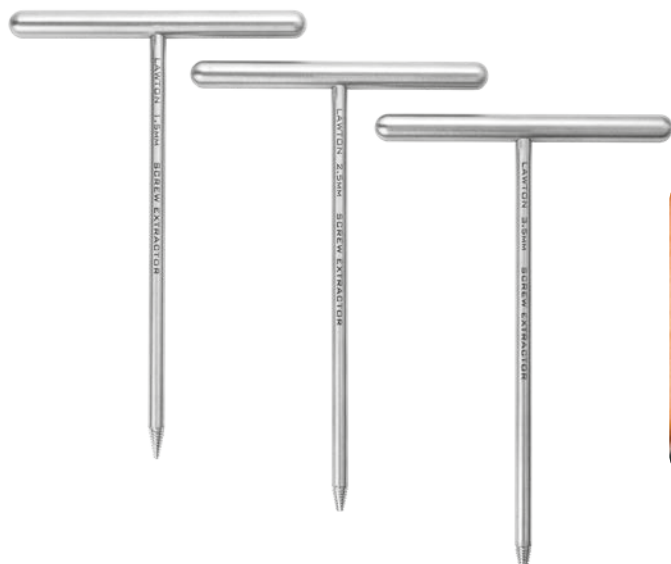

Lawton Screw Extractors

Designed to help extract mini and micro fragment screws; small cannulated screws; or headless screws

PRODUCT NO'S:

7653-00 [Set of Three with Case]

Individual Parts:

7653-01 [1.5 mm Screw Extractor]

Overall Length: 6" (15,2 cm)

Handle Width: 4" (10,2 cm)

7653-02 [2.5 mm Screw Extractor]

Overall Length: 6" (15,2 cm)

Handle Width: 4" (10,2 cm)

7653-03 [3.5 mm Screw Extractor]


Overall Length: 6" (15,2 cm)

Handle Width: 4" (10,2 cm)

1025 [Sterilization Case]


Designed by

Jeffrey Lawton, MD

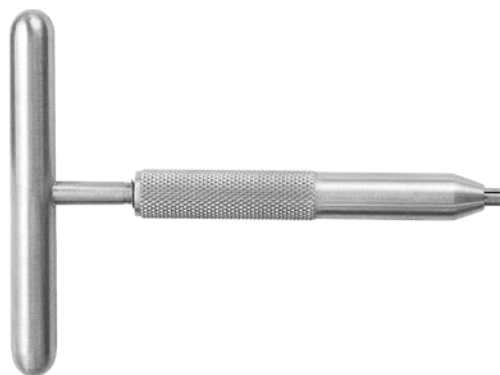

Lawton Broken Screw Extractor

Designed to help remove broken or stripped screws (1 mm-2 mm)



PRODUCT NO:

7653-04

Overall Length: 4" (10,2 cm)

Handle Width: 3" (7,6 cm)

Designed by Jeffrey Lawton, MD



Gelbke Cobb Elevator with Suction

Designed to be used during exposure of the posterior spine, as well as for pelvic and acetabular trauma cases

PRODUCT NO:

3433

Overall Length: 12.75" (32,4 cm)

Cobb End Width: 18 mm (.7")

Shaft plus Head Length: 5.5" (15 cm)

Designed by Martin K. Gelbke, MD



New!



Gupta Extended Osteotome

Designed to help cut bone and cartilage in procedures such as facetectomies and vertebrectomies

PRODUCT NO:

5233

Overall Length: 11" (27,9 cm)

Blade Width: .5" (13 mm)

Designed by Munish C. Gupta, MD



Gupta Disc Space Spreaders with Easy Release Locking Mechanism

Designed to distract open collapsed disc spaces

Locking ratchet mechanism helps prevent accidental release, and provides for controlled adjustment and easy release.

PRODUCT NO'S:

4290 [Standard Straight]
Overall Length: 8.5" (21,6 cm)
Blade Width: 10 mm
Blade Thickness - Closed: 3 mm
Opens to: 22 mm

4291 [Large Straight]
Overall Length: 11.5" (29,2 cm)
Blade Width: 13 mm
Blade Thickness - Closed: 4 mm
Opens to: 25 mm


4292 [Standard Curved]
Overall Length: 9.25" (23,5 cm)
Blade Width: 10 mm
Blade Thickness - Closed: 3 mm
Opens to: 22 mm

4293 [Large Curved]
Overall Length: 12.5" (31,8 cm)
Blade Width: 13 mm
Blade Thickness - Closed: 4 mm
Opens to: 25 mm

Designed by Munish C. Gupta, MD



Large Straight

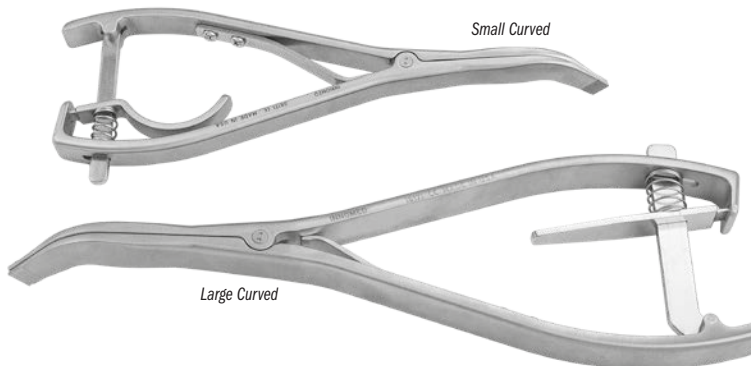

Large Curved

Ortho Self-Retaining Retractors

Calibrated ratchet is used to accurately measure the size of opening – useful in procedures to help assess bone graft needs

- ▶ Features a no-teeth design, available with flat or serrated outside blades
- ▶ Also useful in knee replacement surgery to separate the femur and tibia, where the calibrated design can be used to help balance ligaments
- ▶ Also useful in foot & ankle surgery



PRODUCT NO'S:

Flat Outside Pads

1842 [Small Flat]
Overall Length: 6.5" (16,5 cm)
Blade Width: 7 mm
Blade Thickness: 1.68 mm

1843 [Medium Flat]
Overall Length: 9.25" (23,5 cm)
Blade Width: 10 mm
Blade Thickness: 1.68 mm

Serrated Outside Pads

1842-01 [Small Serr.]
Overall Length: 6.5" (16,5 cm)
Blade Width: 7 mm
Blade Thickness: 1.68 mm


1843-01 [Medium Serr.]
Overall Length: 9.25" (23,5 cm)
Blade Width: 10 mm
Blade Thickness: 1.68 mm



Available with flat or serrated outside blades

Calibrated ratchet (in mm).





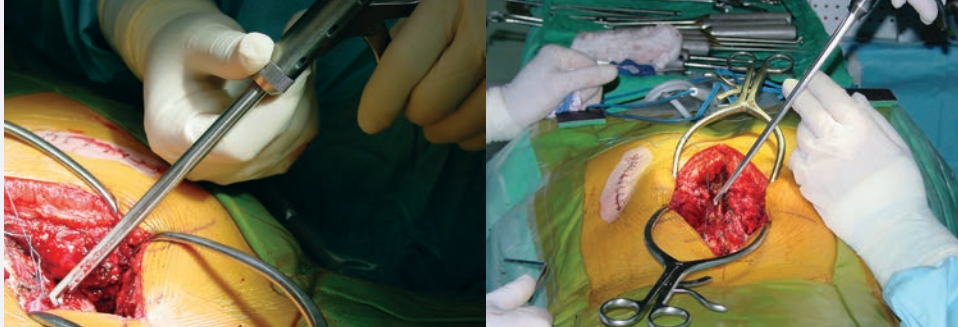

Rogozinski Rotating Rongeur

Designed with cutting direction adjustments of 360°, allowing the instrument to be held in an ergonomic position for enhanced control, strength and precision

- ▶ Locks every 30° of rotation: push in and turn to achieve the desired position, release to set
- ▶ Bone fragment ejector holes along the underside and on the tip of the barrel
- ▶ Each rongeur comes with one Bone Push Rod, designed to help push bone fragments out

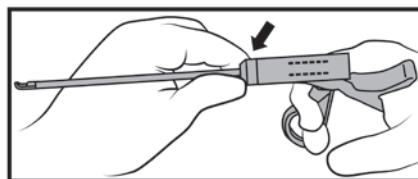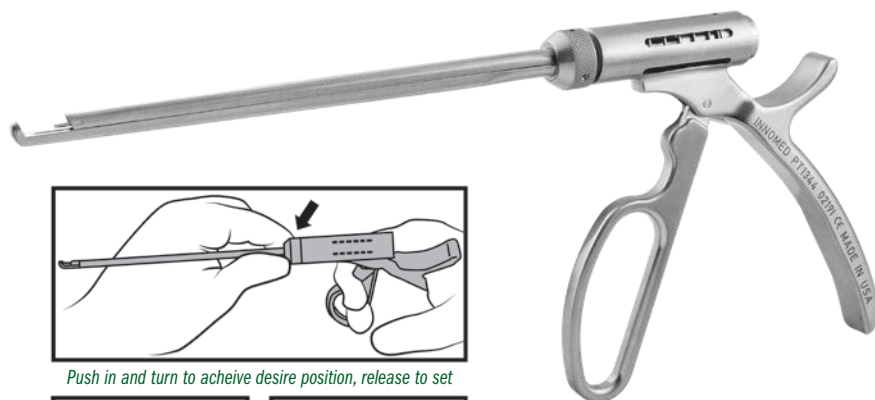

Push in and turn to achieve desired position, release to set



*Bone Push Rod
One Included with Each Rongeur*

PRODUCT NO'S:

5007-4MM [4mm Rongeur / Bone Push Rod Kit]

5007-5MM [5mm Rongeur / Bone Push Rod Kit]

Also available individually:

5007-4MM-01 [4 mm/70° Rongeur]

Overall Length: 13" (45,7 cm)

Shaft Length: 7" (17,8 cm)

Jaw Bite Width: 4 mm

5007-5MM-01 [5 mm/70° Rongeur]

Overall Length: 13" (45,7 cm)


Shaft Length: 7" (17,8 cm)

Jaw Bite Width: 5 mm


5007-BPR [Bone Push Rod]

Overall Length: 4.75" (12,1 cm)

Designed by Chaim Rogozinski, MD and Abe Rogozinski, MD

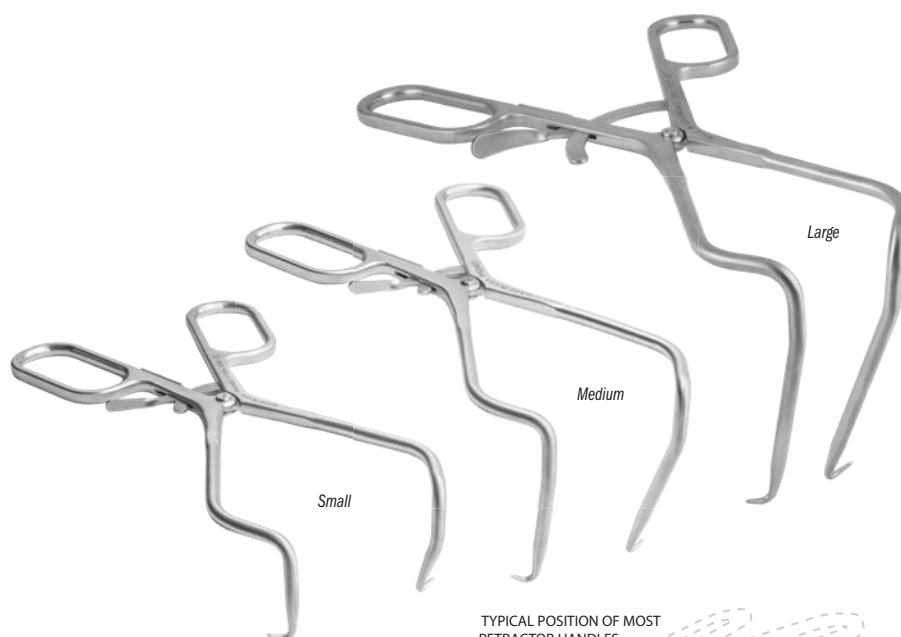

TYPICAL POSITION OF MOST RETRACTOR HANDLES

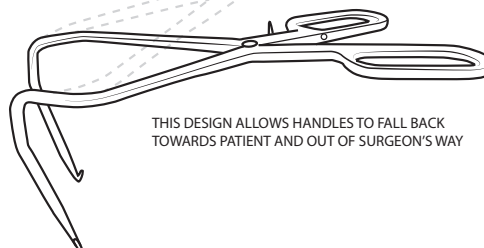

THIS DESIGN ALLOWS HANDLES TO FALL BACK TOWARDS PATIENT AND OUT OF SURGEON'S WAY



Rogozinski Reverse Angle Retractors

Designed to be self-leveling, helping to maintain the body of the retractor on the patient for soft tissue retraction and out of the surgeons field, with finger loops designed for use with either hand

Designed for spine but can be used for other surgeries as well.

PRODUCT NO'S:

4272 [Large]

Overall Length: 9" (22,9 cm)

Length to Bend: 8.5" (21,6 cm)

Depth: 4.25" (10,8 cm)

4273 [Medium]

Overall Length: 8" (20,3 cm)

Length to Bend: 8" (20,3 cm)

Depth: 3" (7,6 cm)



Designed by Chaim Rogozinski, MD

4274 [Small]

Overall Length: 8" (20,3 cm)

Length to Bend: 8" (20,3 cm)

Depth: 1.75" (4,4 cm)



Trauma/Spine Deep Tissue Retractor

Designed to help maximize exposure with 90° arms and deep tissue blades

The retractor arms are available in configurations of 7 or 4 teeth.

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY


PRODUCT NO'S:

1862 [4 Teeth]

Overall Length: 7.5" (19,1 cm)
Handle-to-Bend Length: 6" (15,2 cm)
Drop Depth: 3.25" (8,3 cm)
Prongs: 1.5" Long x .75" Wide (38 mm x 19 mm)

1863 [7 Teeth]

Overall Length: 7.5" (19,1 cm)
Handle-to-Bend Length: 6" (15,2 cm)
Drop Depth: 3.25" (8,3 cm)
Prongs: 1.5" Long x 1.375" Wide (38 mm x 35 mm)

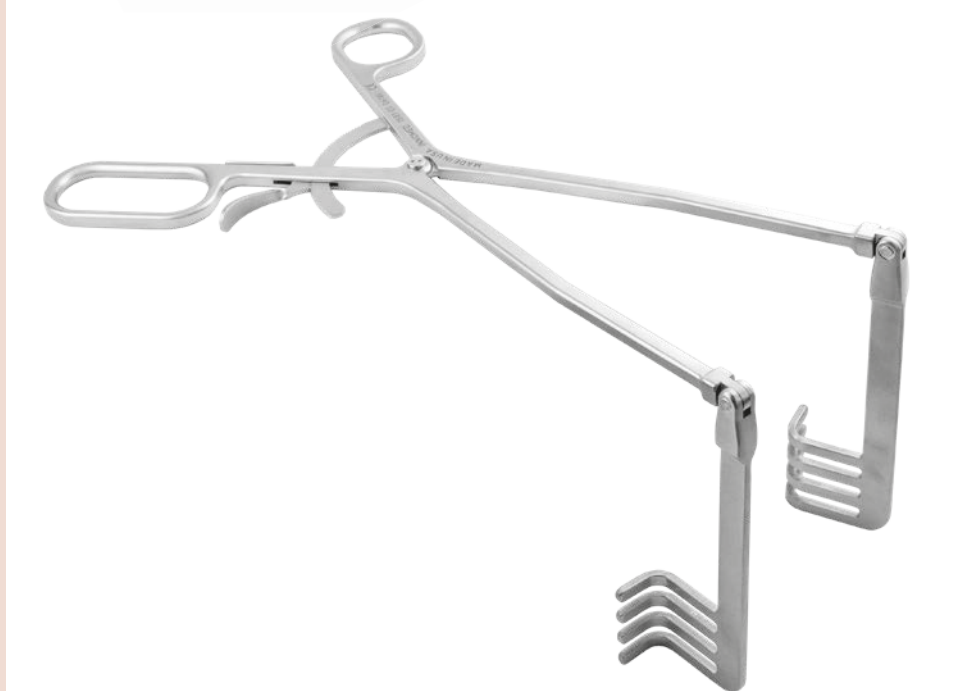

Large Exposure Self-Retaining Retractor

Designed for effective exposure of large wounds

PRODUCT NO:

1581-01

Overall Length (flat): 15.75" (40 cm)
Leg Depth from Bend: 5.25" (13,3 cm)

Designed by Vincent Ng, MD



Double Bent Extended Deep Tissue Retractor


Designed to help maximize exposure with 90° arms and deep tissue blades

PRODUCT NO:

1859

Overall Length: 8" (20,3 cm)
Handle-to-Bend Length: 6" (15,2 cm)
Drop Depth: 3" (7,6 cm)
Prongs: 1.375" Deep x 1.375" Wide (3,5 cm x 3,5 cm)




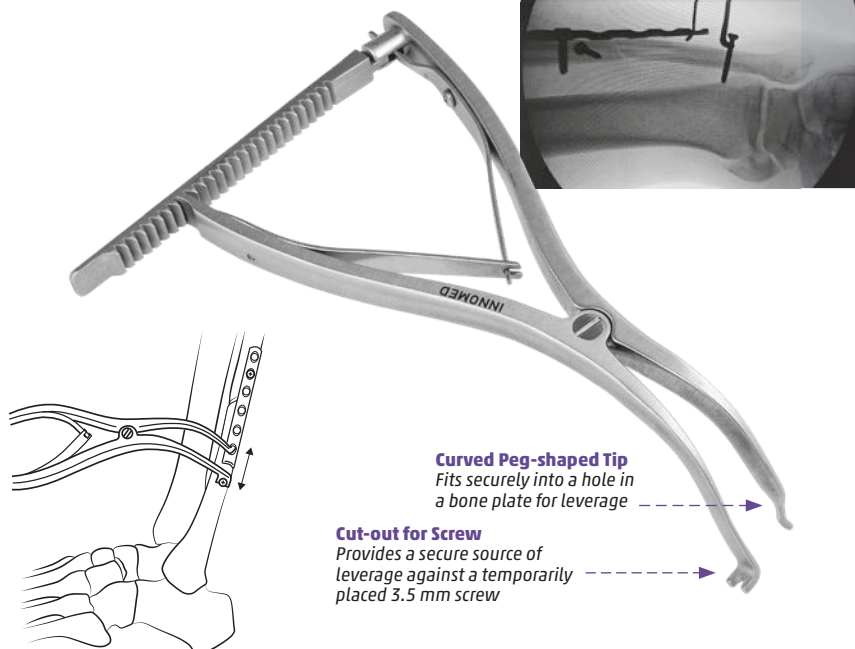

Wixted Fracture Distractor

Designed to provide opposing leverage to help bring the fibula (or other bone) back out to its proper length after it has been shortened by a fracture

A 3.5 mm screw is temporarily placed above a plate, providing a source of leverage for the screw holding end of the distractor. The curved peg-shaped tip is then placed into a hole in the bone plate, and the distractor is activated to bring the bone back to its proper length before fixation.




Designed by John J. Wixted, MD

PRODUCT NO:

1882

Overall Length: 7" (17,8 cm)

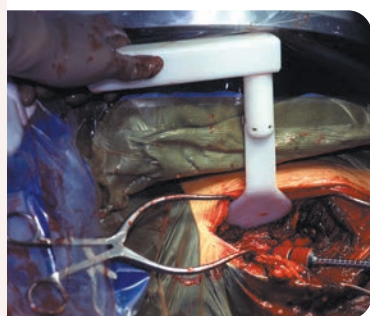

Dozier Radiolucent Bennett Hip Fracture Retractor

Can be kept in place while using image intensification or taking an x-ray

Designed to be used in hip fractures with the advantage that the retractor can be kept in place while using image intensification or taking an x-ray. The handle can be rotated to the right or left for surgeon preference. May be steam or gas sterilized.

Designed by John K. Dozier, MD

PRODUCT NO:

6870

Handle Length: 6.75" (17,1 cm)

Blade Length: 8.5" (21,6 cm)

Blade Width at Widest: 67 mm





Fig. 1: Diaphyseal fractures with clamps

Fig. 2: Intra-articular fracture using pins

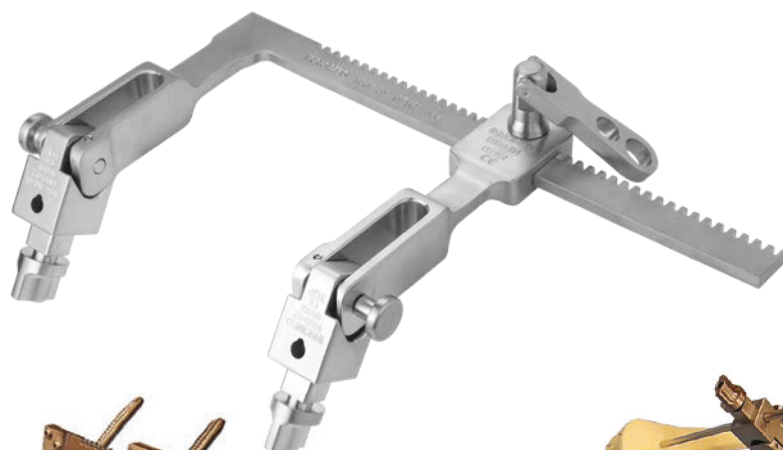

Femur/Tibia Fracture Distractor

Use with most bone clamps for overlapped diaphyseal fractures (fig. 1) or 6 mm Schanz pins to distract intra-articular fractures (fig. 2) for reduction and fixation

Bone clamps and Schanz pins not included.



PRODUCT NO'S:

1809

Overall Length: 10.5" (26,7 cm)

Overall Width: 7.25" (18,4 cm)

For Pins Up To: .25" (6,4 mm)

Individual/Replacement Parts:

1809-02 [Pivot Block]

1809-03 [Frame (no pivot blocks or moveable arm)]

1809-04 [Moveable Arm (no pivot block or handle)]

1809-05 [Handle]

A portion of all proceeds goes to SIGN Fracture Care International, a 501(c)(3) non-profit, to promote equality of fracture care in developing countries. signfracturecare.org

AK Fracture Reducer

Designed to help reduce long bone fractures of the femur and tibia, especially helpful with shortened long bone fractures due to young, strong musculature in acute trauma, or neglected fractures due to overriding circumstances or late referral



- ▶ The curved, serrated tip helps to wedge and hold the reducer in place
- ▶ The curved trough side of the reducer helps capture and control the bone while leverage is applied
- ▶ Once in place, by pushing on the T-handle, the surgeon uses the reducer to help move the bones into alignment for plating or rodding



PRODUCT NO:

3870

Overall Length: 12.5" (31,8 cm)

Blade Width: 1.5" (3,8 cm)

Designed by Byron McCord, MD

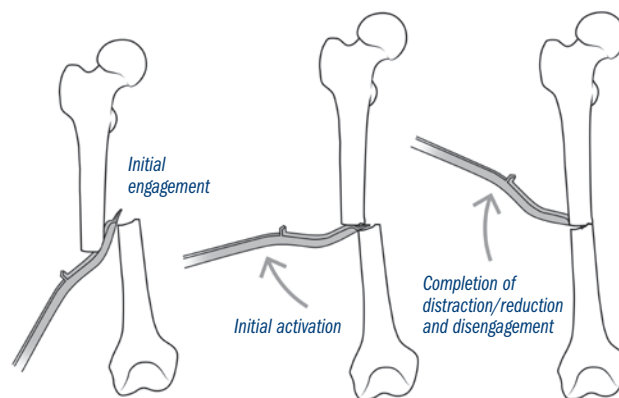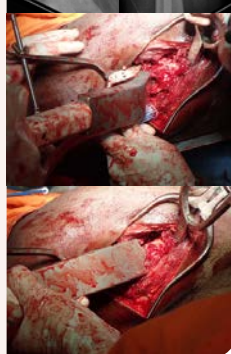

New!

Fracture Reduction Punch Clamp

Designed for use in select cases when vertical (or sagittal) plane clamping is necessary during forearm reduction, humeral fracture reduction, or diaphyseal reduction of the tibial shaft

PRODUCT NO:

5072

Overall Length: 10.5" (26,7 cm)


Point to Point Opening:

- Minimum .375" (10 mm)

- Maximum 1.375" (35 mm)

Pin Diameter: .125" (3,2 mm)

Designed by Jong-Keon Oh, MD

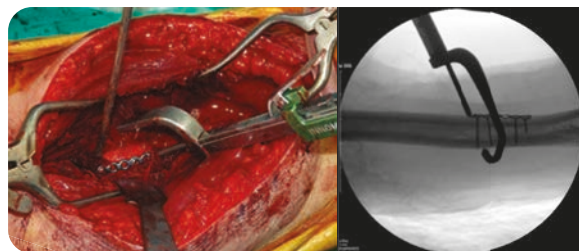

Stoll Bone Plate Clamp

Designed to help hold a bone or bone plate in position for reduction and fixation—helpful with clavicle and fibula fractures

PRODUCT NO:

1774

Overall Length: 10" (25,4 cm)

Designed by Jordan Stoll, MD



INNOMED



Subtrochanteric Femur Fracture Reduction Clamp

Contour design helps clamp a subtrochanteric or femoral shaft fracture treated with current generation femoral IM rodding systems using external aiming arms/targeting devices

PRODUCT NO:

3850


Overall Length: 12.875" (32,7 cm)

Handle Length: 7.5" (19,1)

Jaw Length: 5.25" (13,3 cm)

Jaw Width: .25 (6,3 mm)

Designed by David Beard, MD

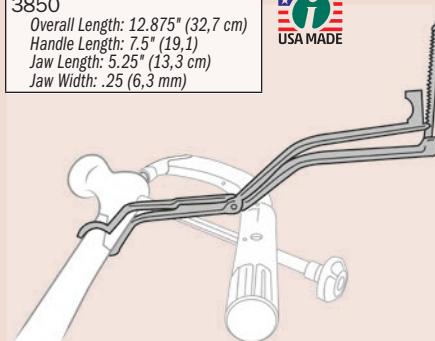

Available with or without ratchet



Beard IM Nail Guide Wire Clamp

Designed to help provide quick grasp-and-release of an IM guide wire for positioning and advancement along the length of the guide wire

- ▶ Anatomic pistol grip for comfortable use
- ▶ Facilitates fracture reduction in appropriate cases
- ▶ Universal to all systems using IM guide wires and IM fixation
- ▶ For use with pins up to 4 mm

PRODUCT NO'S:

3019 [Clamp with Ratchet]

Dimensions: 5.5" w x 6" h (14 cm x 15,2 cm)

3019-01 [Clamp without Ratchet]

Dimensions: 5.5" w x 6" h (14 cm x 15,2 cm)



Designed by David Beard, MD

Cannestra Trochanteric Fracture Reduction Clamp

Designed to help reduce comminuted intertrochanteric and subtrochanteric hip fractures, this clamp is offset at its ends to avoid placement into the fracture bed

Clamping ends are curved and rotated to allow maximum bony contact upon fracture reduction. Ideal for fractures with a flexed anterior cortical spike. Made for right and left hip fracture configurations.

PRODUCT NO'S:


3860-L [Left]

Overall Length: 11.25" (28,6 cm)

3860-R [Right]

Overall Length: 11.25" (28,6 cm)

Designed by Vince Cannestra, MD

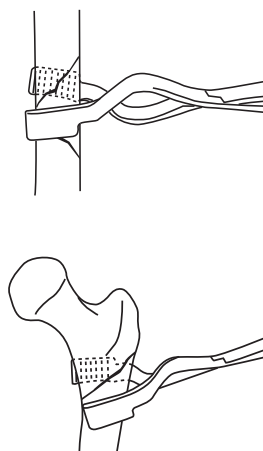

Browner MIS Bone Clamp

Designed to help hold a bone or bone plate for fixation, the clamp is inserted anterior to the bone, rotated to wrap around the bone, then screwed into the desired position

Sized to allow use on a femur, tibia or humerus.


PRODUCT NO:

1379

Overall Length: 9.25" to 11.5" (23,5 to 29,2 cm)
Maximum Bone Diameter: ~ 35 mm



Designed by Bruce D. Browner, MD

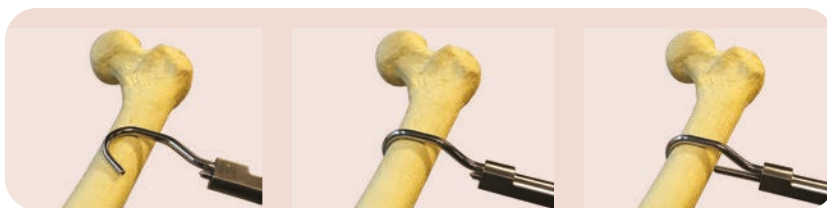

Vosburg Cannulated Periarticular Clamp

Cannulated clamp tips allow passage of k-wires

By compressing the fracture with the clamp and then passing two k-wires, the clamp can then be removed to allow more working room and versatility when applying a plate.

PRODUCT NO:

1864

Overall Length: 13" (33 cm)
Handle Length: 8" (20,3 cm)
Ratcheted Opens from 2" to 3.5" (5,4 to 7,6 cm)
Accepts Pins up to: 7/64" (2.8 mm)

Designed by
Caleb Vosburg, MD

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY



Periarticular Reduction Forceps

Designed for reduction of intraarticular and periarticular fractures

Pointed ball tips help provide a secure hold in the bone despite minimal contact. Three sizes available.

PRODUCT NO'S:

1856-01 [Small]

Jaw Height @ Tips Parallel: 3.375" (8,6 cm)
Jaw Width @ Tips Parallel: 7.25" (18,4 cm)
Maximum Jaw Opening @ Tips: 3.1" (7,9 cm)
Overall Length: 11" (27,95 cm)

1856 [Medium]

Jaw Height @ Tips Parallel: 4.75" (12,1 cm)
Jaw Width @ Tips Parallel: 10.5" (26,7 cm)
Maximum Jaw Opening @ Tips: 5.2" (13,2 cm)
Overall Length: 14.75" (37,5 cm)

1857 [Large]

Jaw Height @ Tips Parallel: 6.25" (15,9 cm)
Jaw Width @ Tips Parallel: 12" (30,5 cm)
Maximum Jaw Opening @ Tips: 8" (20,3 cm)
Overall Length: 16" (40,7 cm)



Wetzel Acetabular Fragment Clamp

Designed to help increase the ability to control and manipulate an acetabular fragment during Periacetabular Osteotomy (PAO) surgery for hip dysplasia

The cannulated center hinge allows a 5 to 6 mm Schantz pin (not included) to be used in conjunction with the clamp — providing a unified pin-and-clamp together that is stronger than each separately and offers enhanced fragment control.

PRODUCT NO:

3648

Overall Length: 11.5" (29,2 cm)

Jaw Opens to: 1.375" (3,5 cm)


Jaw Length: 2.5" (6,4 cm)

Jaw Width: .5" (12,7 mm)

Hole Diameter for Schantz Pin Up To: .25" (6,3 mm)



Designed by Robert Wetzel, MD & Todd O. McKinley, MD

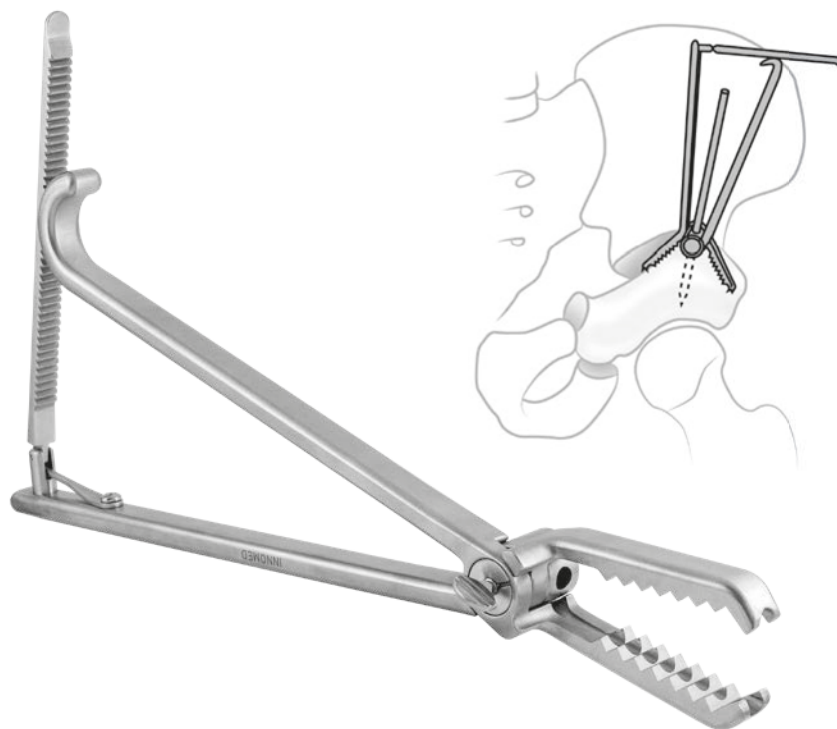

Angled Lowman-Type Bone Clamp

Angled for easier insertion of the jaws around the bone

The offset distance between the jaws and handle of the clamp allow space for free and easy access to use a drill or screwdriver. The angled clamp and more-open and thinner jaws facilitate easier use in deep incisions. The angled shaft also acts as a self-retaining retractor. The tightening handle is scalloped to lessen slippage when tightening or untightening.

PRODUCT NO:


1770

Overall Length: 9.25" (23,5 cm)

Length from Bend: 4.25" (10,8 cm)

Minimum Clamp Diameter: 1" (2,5 cm)

Designed by
John J. McLeod, Jr., MD

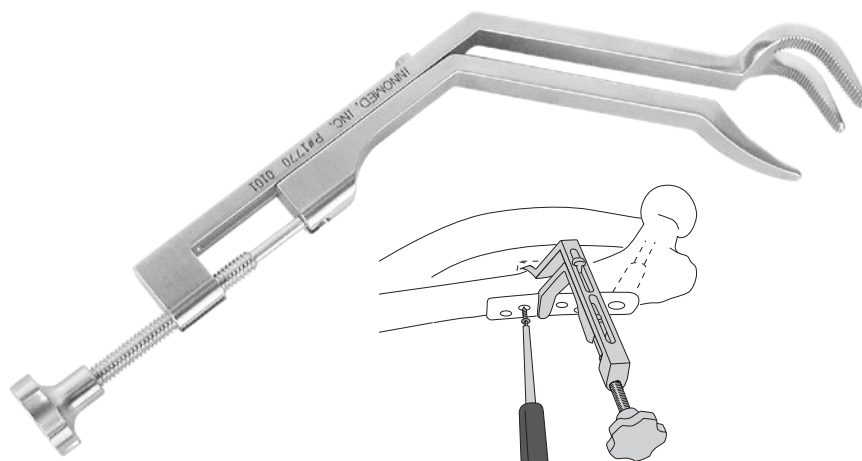

Durkan Ratchet Bone Clamps

Design of ratcheting mechanism allows for quick tightening and release around the bone

PRODUCT NO'S:

1867 [Large]

Overall Length: 8.625" (21,9 cm)


Jaw opens to: 3.5" (8,9 cm)

1868 [Small]

Overall Length: 8.5" (21,6 cm)

Jaw opens to: 3.75" (9,5 cm)

Designed by John Durkan, MD

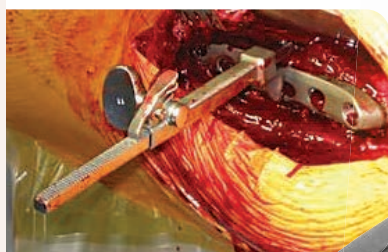

Bone Clamp with Speed Lock

Designed to help hold a bone in position for reduction

PRODUCT NO:

3659

Overall Length: 9.125 (23,2 cm)



New!



Large Bone Clamp with Plate Protection

Designed to help hold a bone/bone plate in position for reduction—the one-side coated jaw helps to protect from marring the bone plate

PRODUCT NO'S:

3659-L [Left]

Overall Length: 9.125 (23,2 cm)

3659-R [Right]

Overall Length: 9.125 (23,2 cm)



Chen Diaphyseal Fracture Reduction Clamp

Designed to facilitate and maintain reduction of the internal fixation of diaphyseal and meta-diaphyseal fractures of long bones

Works especially well with short oblique bones while providing room to implement the plate with this bone clamp still in place.

- ▶ Pivoting pads accommodate metaphyseal fractures
- ▶ The quick release enables adjustment without losing reduction
- ▶ Helps provide provisional reduction of diaphyseal fractures – humeral shaft fractures, tibial fractures

PRODUCT NO:

1808

Overall Length: 9.25" (23,5 cm)

Arm Downward Offset: 15 mm

Pad Dimensions: 1" x .375" (25,4 cm x 1 cm)

 Designed by
Franklin Chen, MD


Durham Bone Reduction Clamps

Allows application of a bone plate without removing the reduction clamp

The large clamp with speedlock is designed for large bones such as the femur and tibia. See page 142 for standard clamp version.

The wide window directly above the jaws provide space to allow a bone plate to be slid into position without removing the clamp.

PRODUCT NO'S:

3652 [Standard]


Overall Length: 7.375" (18,7 cm)

3652-01 [Large with Speedlock]

Overall Length: 9.25" (23,5 cm)



Designed by Alfred A. Durham, MD

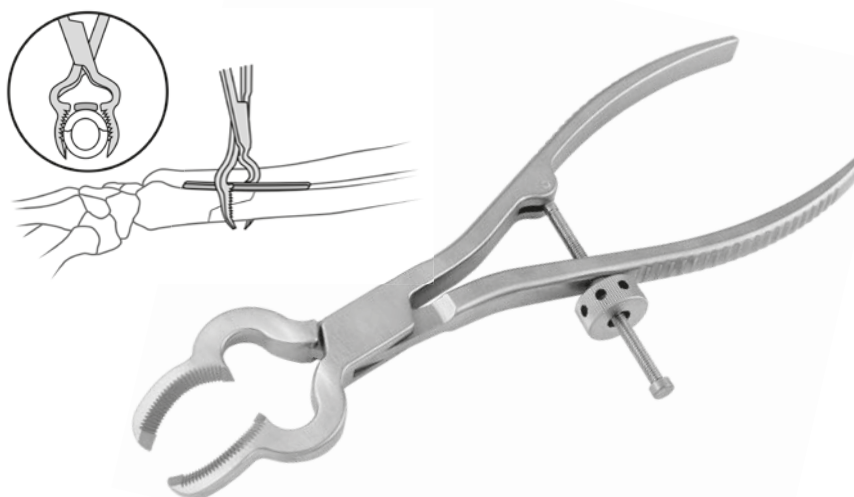



Bargo Bone Holding Clamp

Designed to aid in the reduction of various fractures, and can help secure a plate in place

For fractures such as: spiral, transverse, compound, oblique, or butterfly. Can also be used to secure a plate in place while the screw holes are being drilled and screws inserted. The fracture site can also be manipulated with the clamp being used as a lever. The teeth in the jaws allow for a better grip and the ratchet locking handle allows for use on various bone diameters.

PRODUCT NO:

1895-01

Overall Length: 5" (12,7 cm)

Pads: .75" x .45" (1,9 cm x 1,2 cm)

Designed by Lonnie Bargo, CST/CFA



Weinert Bone Holding Reduction Clamp

Designed to securely hold fracture reductions

The stops on each end help prevent excessive penetration of metaphyseal and soft bone.

PRODUCT NO:

1755

Overall Length: 8.5" (21,6 cm)

Jaw opens to: 3" (7,6 cm)

Designed by Carl R. Weinert, MD



O'Brien Bone Clamps

Designed for use in stabilization of a fracture or osteotomy

Allows for placement of the bone clamp where it can best stabilize bone fragments. The drill guide allows for screw placement through the top of the clamp. Calibrations on the handle help eliminate the use of a depth gauge.

Integrated drill guide and bone diameter gauge

PRODUCT NO'S:

1890-02 [Large]

Drill Guide Diameter: 10 mm

(accommodates up to 6.5 mm screw)

Calibrated from 12 mm to 40 mm

Overall Length: 9.25" (23,5 cm)

1890-01 [Small]

Drill Guide Diameter: 8 mm

(accommodates up to 4 mm screw)

Calibrated from 8 mm to 30 mm

Overall Length: 6" (15,2 cm)

1890-XSM* [Extra Small]

Drill Guide Diameter: 6 mm

Overall Length: 4"

Designed by
Todd O'Brien, DPM



Ratcheting Reduction Clamp Kit

Designed as a soft tissue sparing fracture reduction clamp

- ▶ High torque can help provide bone and joint reduction without squeezing surrounding tissues
- ▶ Swivel points are placed on the bone, plate, or screw and the ratcheting dial is turned to the desired torque, allowing hands free operation
- ▶ Swivel point design allows the clamp to be easily moved from x-ray view without losing reduction
- ▶ Screw Point fits into a screw head
- ▶ Plate Point fits into a 3.5 mm plate hole

Kit includes: (1) Ratcheting Reduction Stationary Arm, (1) Ratcheting Reduction Mobile Arm with Ratchet Knob (1) Plate Point, (1) Screw Point, and (2) Percutaneous Points

PRODUCT NO'S:

3840-00 [Clamp Kit]

Also available Individually:

3840-02 [Plate Point]

Overall Length: 1" (2,54 cm)

3840-03 [Screw Point]

Overall Length: .875" (2,2 cm)

3840-04 [Percutaneous Point]

2 included in set, one with this product number
Overall Length: 1" (2,54 cm)

3840-MA [Ratcheting Reduction Mobile Arm with Ratchet Knob]

Overall Length: 6.5" (16,5 cm)


3840-SA [Ratcheting Reduction Stationary Arm]

Overall Length: 10.5" (26,7 cm)

Width: 9" (22,9 cm)

Height: 6" (15,2 cm)

Designed by Michael Craig, OPA-C

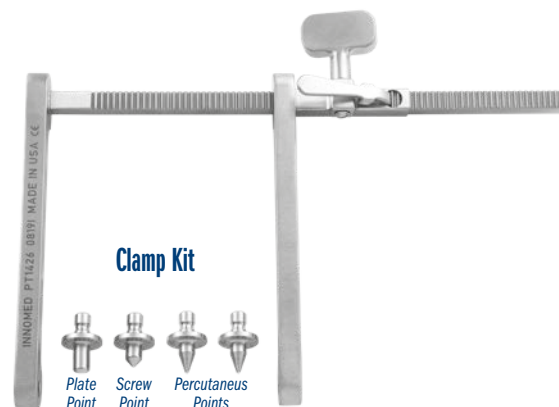

Sarraf Fracture Reduction Thimble

Helps hold bone fragments in place during fixation

Helps to maintain a fracture fragment in the appropriately reduced position during application of K-wires. Helpful in osteoporotic bone that is not amiable to forced reduction using reduction clamps. The wire guides help to aim the K-wire, with three positions for choice of optimal placement and for parallel wire placement. The pointed tips at the end of the thimble help to reduce the chance of slippage while maintaining a fracture reduction.

PRODUCT NO'S:

2290 [22 mm]

Overall Length: 1.185" (3 cm)

Guides Accept K-wires Up To: .078" (2 mm)

2291 [26 mm]

Overall Length: 1.185" (3 cm)

Guides Accept K-wires Up To: .078" (2 mm)

Designed by
Khaled M. Sarraf, MD



Sumko Surgical Finger Guide

Used to help insert a 3.2 mm guide wire, especially during hip fracture surgery, to help prevent puncturing the surgeons' glove

The entry point for a trochanteric nail can be located through a smaller incision with this device, with reduced risk of penetrating the surgeon's glove while finding the starting point for the guide wire.

PRODUCT NO:

8991

Overall Length: 4" (10,2 cm)

Designed by
Michael H. Sumko, MD

US Patent #503638945





Bacastow Tibial Plateau Elevators

Designed to help with indirect reduction of a depressed tibial plateau fracture, and can be used with arthroscopic visualization and percutaneous fixation

PRODUCT NO'S:

5297 [Starter Elevator]
Overall Length: 11" (27,9 cm)
Tamp Diameter: 4,7 mm


5298 [Finish Elevator]
Overall Length: 11" (27,9 cm)
Tamp Diameter: 10,4 mm

Starter
4.7 mm

Finish
10.4 mm



Designed by David Bacastow, MD

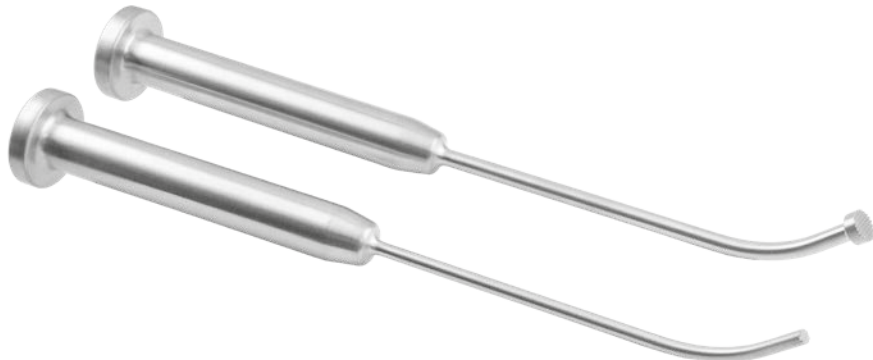

Sandman Curved Bone Punch

Designed to help elevate a depressed tibial plateau fracture

PRODUCT NO:


5305
Overall Length: 14" (35,6 cm)
Shaft Length: 9.5" (24,1 cm)
Impactor Diameter: 12.5 mm (.5")

Designed by Geoffrey A. Sandman, MD



Malleable Bone Tamps

The large tamp is designed to help elevate a depressed tibial plateau fracture, while the small tamp can help elevate a depressed tibial plafond and smaller tibial plateau fractures

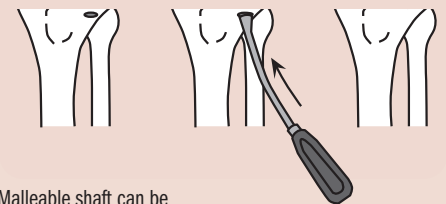

Malleable shaft can be contoured for different angles.

PRODUCT NO'S:

5296 [Large]
Overall Length: 14" (35,6 cm)
Shaft Length: 9.5" (24,1 cm)
Impactor Diameter: 12.5 mm

5296-01 [Small]
Overall Length: 9.5" (24,1 cm)
Shaft Length: 6" (15,2 cm)
Impactor Diameter: 10 mm

Modified by Serge Kaska, MD



Malleable

Stanton Nail/Screw Drill Guide Assembly FOR DISTAL HUMERAL, FEMORAL, OR TIBIAL SCREWS

Designed to help hold and stabilize a drill guide, allowing the surgeon to obtain 'perfect circles' and drill distal locking screw holes without exposure of the hand to the x-ray beam

The drill guide unit (sleeve/trocar) is placed over the side of the bone through an incision. The locking holder is attached to the guide and rested against the skin for stability. With the x-ray on, the guide unit is adjusted by moving the holder until the trocar lines up with the hole in the rod. The trocar is removed and a drill bit is then inserted into the guide.

PRODUCT NO'S:

8986-00 [Assembly Set]

Set includes: (1) Holder, (1) Sleeve, and (1) Trocar

Also available individually:

8986-01 [Sleeve]

Overall Length: 3.85" (9,8 cm)

Outside Diameter: 7 mm

8986-02 [Trocar Alignment Tool]

Overall Length: 4.375" (11,1 cm)

Trocar Diameter: 5 mm

8987 [Locking Drill Guide Holder]

Overall Length: 10.5 (26,7 cm)

Guide Height: 21 mm

Designed by
John L. Stanton, MD



Locking Drill Guide Holder

Trocar Alignment Tool

Sleeve

Kodros Radiolucent Awl

Helps locate holes in interlocking nails

PRODUCT NO:

8030-01

Pin Diameter: 3.7 mm

Pin Length: 67 mm

Modified by S. Kodros, MD



Ball Spike with Bell Handle

Designed with a long shaft for use in deep wounds

PRODUCT NO:

8032

Overall Length: 12" (30,5 cm)



Fracture Reduction Pick

Used to align bone fragments, and to pick away tissue and bone fragments

PRODUCT NO:

S0129

Overall Length: 6.25" (15,9 cm)



New!

Small Cannulated Ball Spike

Designed to help reduce a bone fragment and keep it reduced, while the cannulation allows placement of a k-wire (up to 1.6 mm/.062") into the fragment

- ▶ Helps to prevent slipping while inserting k-wires
- ▶ Can serve as a handle for k-wire joysticks

PRODUCT NO:

8092

Overall Length: 4.5" (11.4 cm)

Overall Length: 3" (7.6 cm)


Ball Diameter: .275" (7 mm)



Designed by Benjamin C. Taylor, MD

Resnick Small Bone Tamp with Oblique K-Wire Hole

Design allows for the concurrent reduction of a fracture and placement of a wire into the fracture site – especially helpful when the surgical exposure is small and tight, the fracture fragments are small, and the reduction is demanding



- ▶ Allows the ability to place Kirschner wires into fracture sites
- ▶ The serrated distal end minimizes slippage on the cortical surface, does not interfere with the placement of the guidewire and allows for subsequent surgeon-decided, intraoperative angulation of the wiring once the first cortex is drilled
- ▶ Especially useful in fractures where there is involvement of an articular surface, for example, mallet fractures of the distal phalanx, articular fractures that involve ligamentous attachments or tendon attachments of the phalanges, scaphoid pole small fracture fragments or other small carpal fractures, and radial styloid fractures

PRODUCT NO:

5294


Wire Hole for: 1.25 mm (.045") K-wire

Overall Length: 7.5" (19.1 cm)

Shaft Diameter: 6.3 mm

End Diameter: 2.5 mm

Designed by Charles Resnick, MD

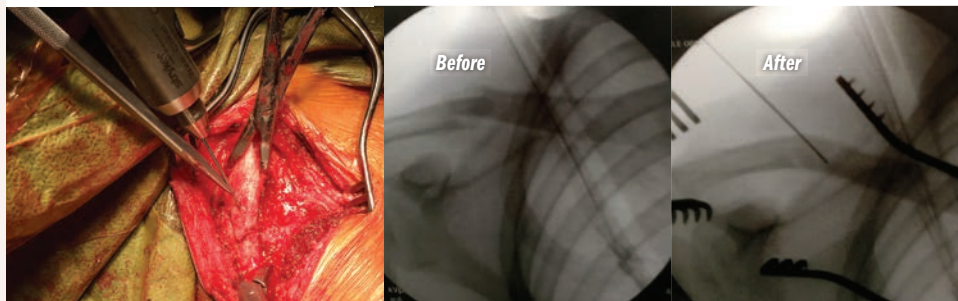

Cannulated Fracture Awl

Helps to reduce fractures without slipping off the bone, and cannulated to allow the placement of k-wire

PRODUCT NO:

8091


Overall Length: 8" (20.3 cm)

Handle Length: 3.3" (8.4 cm)

Cannula fits wire up to: .062" (1.6 mm)



Cannulated

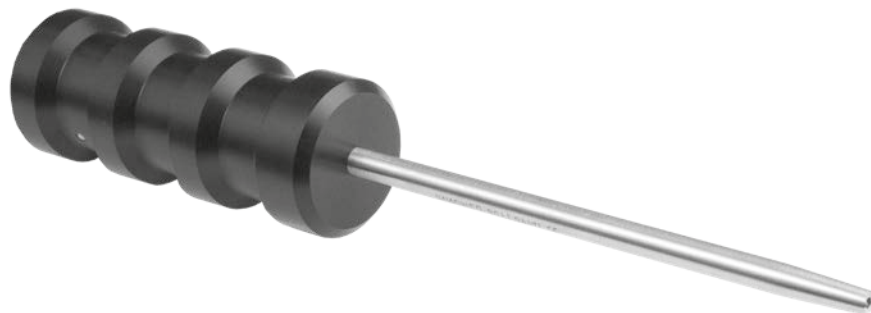

Argintar Claw Drill Guide Wire/Suture Passer

Expandable claw design allows for minimally invasive, reproducible one-step wire/suture passage

Especially helpful during applications where a suture will be passed—particularly when soft tissue dissection is to be minimized, such as wrist reconstruction (DRUJ), elbow reconstruction (ULCL/MCL), foot-ankle reconstruction (ATFL), quad/patella tendon repair surgery, and multi-ligament knee reconstruction (MCL/LCL).

PRODUCT NO'S:

8315-00 [Set: (1) Claw, (1) Wire/Suture Pin]

8315-01 [Claw Unit]

Maximum Internal Opening: 2.5" (6,4 cm)

Product Dimensions: 2.5" x 4" (6,4 cm x 10,2 cm))

1227 Pin with Wire/Suture Hole] 3/32" (2,4 mm)

Overall Length: 6" (15,2 cm)

Designed by Evan Argintar MD



Incavo Wire Passer

Used for passing multiple cerclage wires around bone

Designed to pass multiple cerclage wires around a bone during a multiple wire wrap procedure.

PRODUCT NO'S:

8610-01 [Small]

Overall Length: 7.5" (19,1 cm)

Accepts Wire Up To: 4 mm (5/32")

8610-02 [Large]

Overall Length: 8.675" (21,3 cm)

Accepts Wire Up To: 4 mm (5/32")

Designed by Stephen J. Incavo, MD



Whelan Double-Ended Suture Wire Passer

Passer guide and malleable passer designed to pass suture wires around a bone

The passer guide is placed around the bone, and the thin malleable passer is inserted at the handle end and follows the grooved passer around. The suture wire (up to 18 gauge) is attached to the keyholed end of the passer, which can then be reversed out of the passer, drawing the suture wire around the bone.

PRODUCT NO'S:

8300-00 [Set]

Also available individually:

8300-01 [Passer Guide]

Overall Length: 8.125" (20,6 cm)

Outside Width: 9 mm

Inside Groove Width: 6.5 mm

8300-02 [Passer]

Overall Length: 7.5" (19,1 cm)


Width: 4.6 mm

1025 [Sterilization Case]


Designed by E. J. Whelan, III, MD



Set includes Passer Guide, two Passers, and a sterilization case.



Insert passer into guide to pass around the bone

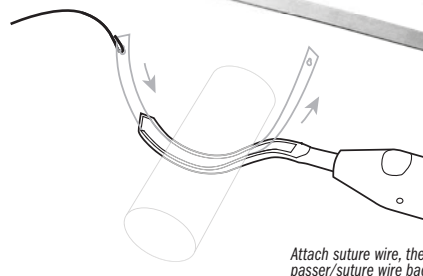

Attach suture wire, then draw the passer/suture wire back around the bone



Vaughan Endzone Retractor

Designed for use when placing the end screws while plating a fracture using a minimally invasive technique

The "U"-shaped wall design helps allow the maximal exposure along the length, or "endzone", of an incision while maintaining adequate width and retraction along the sides of the exposure.

PRODUCT NO:

1766

Overall Length: 8.75" (22,2 cm)



Deep Depth: 45 mm

Deep Internal Width: 14 mm

Shallow Depth: 25 mm

Shallow Internal Width: 12 mm

Designed by
Roderick Vaughan, MD

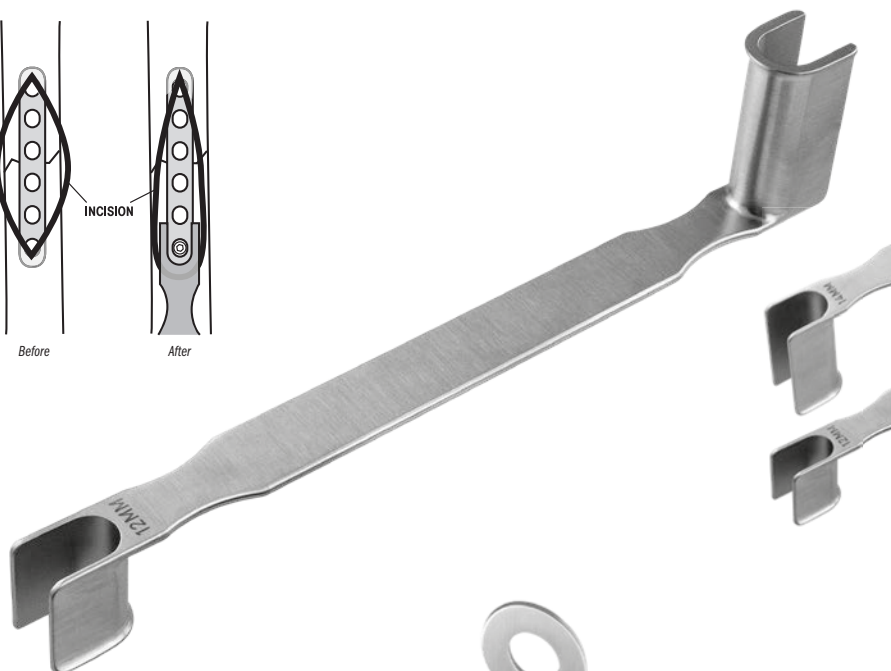

Browner Wire Tightener

Wire is passed through the distal arm hole and into the separate drum holes, and can then be tightened and rotated before being cut with a wire cutter

PRODUCT NO:

8251

Overall Length: 6" (15,2 cm)

Width: 3.75" (9,5 cm)

Wire Hole Diameters: .125" (3,2 mm)



Designed by Bruce D. Browner, MD



DMP Wire Tightener

Used to hand tighten a cerclage wire around a bone

Now with four wire holes — two for up to 20 gauge wires, and two for up to 18 gauge wires. T-Handle end is used to hand tighten a wire.

PRODUCT NO:

8729

Overall Length: 4.5" (11,4 cm)

Handle Width: 2.625" (6,7 cm)

End Diameter: 15 mm

Designed by DMP



Jackson Flat Top Traction Device

A table-top traction device designed for fracture fixation in the acetabulum, pelvis, and femur

Can be used in a variety of applications, including open and percutaneous pelvic and acetabular fracture surgery, hip fracture fixation and femur fracture fixation including antegrade or retrograde nailing.

The light-weight portable device attaches directly to a standard radiolucent flat top table. Features adjustable height and a freely swiveling top. Recommended for use with the disposable sterile kit, which is sold separately.

PRODUCT NO'S:

0007 [Jackson Traction Device]


This product number includes (1) #0008 Disposable Sterile Kit

Sold Separately:

0008 [Disposable Sterile Kit]

Includes: (1) Impervious Stockinette and (1) 11 ft. Traction rope

0008-CASE [Case of Sterile Kits] Pkg of 10

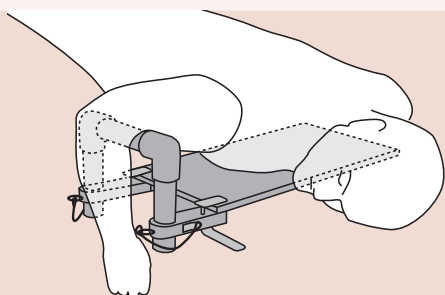

Distal Humerus Fracture Board

Designed for the pinning of pediatric supra-condylar and adult distal humerus fractures

Allows the surgeon to pin these fractures without having to manually hold the fracture reduced, allowing the surgeon to focus on accurate pin placement and reduction. The height of the crossbar is fully adjustable to accommodate different size patients. Reduction is achieved by an assistant gently applying axial traction through the forearm, with the crossbar applying the counter traction. Pinning is done with the C-arm in the lateral position. An optional separate attachment to support the arm for distal humerus fractures in adults is available. Unit not sterilizable.

PRODUCT NO'S:

2445 [Fracture Board – Pediatric]

Main Board Dimensions: 22" x 12" (55,8 cm x 30,5 cm)

Crossbar Height Adjusts From: 4.5" to 7.5" (11,4 cm x 19,1 cm)


2445-01 [Fracture Board – With Adult Adapter]

Optional/Replacement Part:


2445-06 [Adult Adapter]



Designed by Burk Young, MD

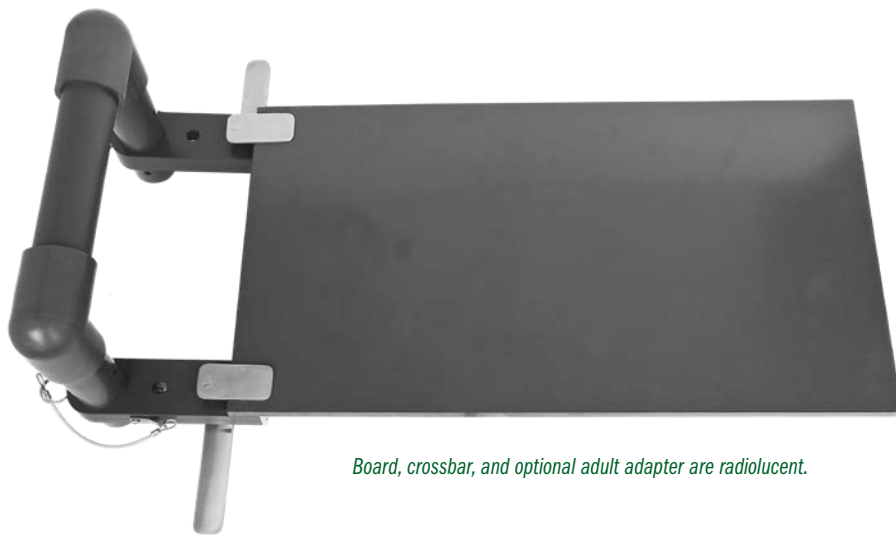

Board, crossbar, and optional adult adapter are radiolucent.

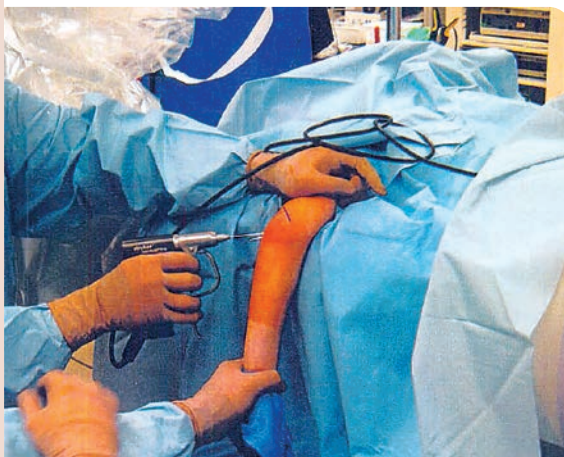

Optional
ADULT
Adapter





Adjustable Knee & Tibial Positioner

Adjustable design allows for use in procedures around the knee such as tibial nailing, tibial condyle plating, patella fracture fixation, supracondylar fracture plating, supracondylar fracture nailing, and total knee replacement

Radiolucent. Steam sterilizable.

PRODUCT NO'S:

2770-00 [Set]

Includes Positioner, Pad, and Two Short Straps

Individual / Replacement Parts

2770-01 [Positioner]

Overall Length (Folded): 28" (71,1 cm)

Overall Length (Flat): 54.75" (139 cm)

Maximum Triangle Height: 14" (35,6 cm)

Width: 5.5" (14 cm)

Thickness (Folded): 1.8" (4,6 cm)

Thickness (Flat): .75" (1,9 cm)

2770-P [Silicone Pad]

Dimensions: 12" x 5.5" (30,5 cm X 14 cm)

2590-S [Short Straps] Pkg of 10

Designed by Ashutosh Chaudhari, MD



Fromm Femur & Tibia Triangles

Used for femur and tibia positioning during nailing, repairs and fractures

Designed to position and hold the femur and tibia during intramedullary nailing of the tibia, ligament repairs and extremity fractures. Allows knee to be flexed greater than 90° to allow reaming and nail insertion without displacing fracture. The triangles are available in four heights: 8.5", 11", 14", and 16". The three smaller triangles are designed to fit inside the larger triangle for storage. They are supplied with an autoclavable silicone cushioning pad and velcro* straps. The triangles are radiolucent and gas or steam sterilizable.

PRODUCT NO'S:

2760-00 [Set of 3] Angles: Top 30°, Two Bottom 75°

2760-01 [11"] Base: 6" (15,2 cm), Height: 11" (27,9 cm)

2760-02 [14"] Base: 7" (17,8 cm), Height: 14" (35,6 cm)

2760-03 [16"] Base: 9" (22,9 cm), Height: 16" (40,7 cm)

Sold Separately – Not In Set:

2760-XS [8.5"] Base 5" (12,7 cm), Height: 8.5" (21,6 cm)

Replacement Parts:

2760-P [Silicone Pad]

2760-S [Straps] Package of 18


8120-SP [Straps for XS] Package of 10

Designed by S.E. Fromm, MD.
Extra Small Triangle designed by S.E. Fromm, MD
& Kenneth Merriam, MD.


*Velcro® is a registered trademark of the Velcro Companies.



Tibial Nailing




Retrograde Femoral Nailing




Retrograde Femoral Nailing

Triangle holds femur reduced (prevents sagging)



Tibia Reduced For:

- Open Reduction and Internal Fixation (ORIF)
- Application of uni- or multi-plane external fixator
- Knee ligament repairs and/or reconstruction



Lower Extremity Leg Positioner

Designed to lift the knee for lower extremity casting applications

Also well suited for use with ankle fractures. Supplied with one autoclavable silicone pad. Positioner is radiolucent and gas or steam sterilizable.

PRODUCT NO'S:

2745

Dimensions: 5.5" H x 9.5" L x 9.25" W
(14 cm H x 24,1 cm L x 23,5 cm W)

Replacement Parts:

2760-P [Silicone Pad]

Designed by
Ronald Romanelli, MD



Sanders Extremity Positioning Tubes

Designed to support the knee and ankle during lower extremity surgery

The 6" tube lifts the knee off the operating table and allows for approximately 30° of knee flexion. Very useful for closure of total knee incisions, supporting fractures of the distal femur, and tibia plateau fractures. The 4" tube elevates the foot and ankle for ankle fracture surgery. The tubes are made of aluminum, allowing them to be autoclaved. They help eliminate the need for rolled sheet bolsters.

PRODUCT NO'S:

2740-01 [Small]
Diameter: 4" (10,2 cm)
Width: 8" (20,3 cm)

2740-02 [Large]
Diameter: 6" (15,2 cm)
Width: 8" (20,3 cm)



Designed by Richard A. Sanders, MD



Sanders Tube Holder

Designed to help stabilize the Sanders Extremity Positioning Tubes (#2740-01 & -02)

The tube holder will help stabilize the tubes when used for lower extremity positioning for lower extremity surgery. Also, by using the tubes with the Stulberg Sliding Bolster (#2730 – see page 82), the knee can be placed in less flexion during the initial incision and wound closure.

PRODUCT NO:

2740-03

Dimensions: 8" x 4" x 1.625" (20,3 x 10,2 x 4,1 cm)



Designed by Richard Sanders, MD



Meyerding Type Retractors with Ergonomic Handle

Designed for general use soft tissue retraction, the ergonomic handle allows for a better grip and less fatigue

PRODUCT NO'S:

6241 [50 x 16 mm]
Overall Length: 8.875" (22,5 cm)
Blade Width: 16 mm
Blade Depth: 50 mm

6242 [75 x 15 mm]
Overall Length: 9" (22,9 cm)
Blade Width: 15 mm
Blade Depth: 75 mm

6243 [75 x 25 mm]
Overall Length: 9" (22,9 cm)
Blade Width: 25 mm
Blade Depth: 75 mm

Non-glare finish featured on the metal retractor parts.



Wide Rake Retractors with Ergonomic Handle

Designed for general use soft tissue retraction, the ergonomic handle allows for a better grip and less fatigue

PRODUCT NO'S:

6051 [Deep, Sharp]
Overall Length: 11.175" (28,3 cm)
Blade Width: 2.375" (6 cm)
Blade Depth: 2.75" (7 cm)

6052 [Deep, Blunt]
Overall Length: 11.175" (28,3 cm)
Blade Width: 2.375" (6 cm)
Blade Depth: 2.75" (7 cm)

6053 [Shallow, Sharp]
Overall Length: 11.175" (28,3 cm)
Blade Width: 2.375" (6 cm)
Blade Depth: 1.875" (4,8 cm)

6054 [Shallow, Blunt]
Overall Length: 11.175" (28,3 cm)
Blade Width: 2.375" (6 cm)
Blade Depth: 1.875" (4,8 cm)

Non-glare finish featured on the metal retractor parts.



Rake Retractors with Ergonomic Handle



Designed for general use soft tissue retraction, the ergonomic handle allows for a better grip and less fatigue

PRODUCT NO'S:

4839 [3-Prong]
Overall Length: 9.5" (24,1 cm)
Rake Width: 13 mm
Rake Depth: 14 mm

4840 [4-Prong]
Overall Length: 9.5" (24,1 cm)
Rake Width: 19 mm
Rake Depth: 14 mm

Non-glare finish featured on the metal retractor parts.

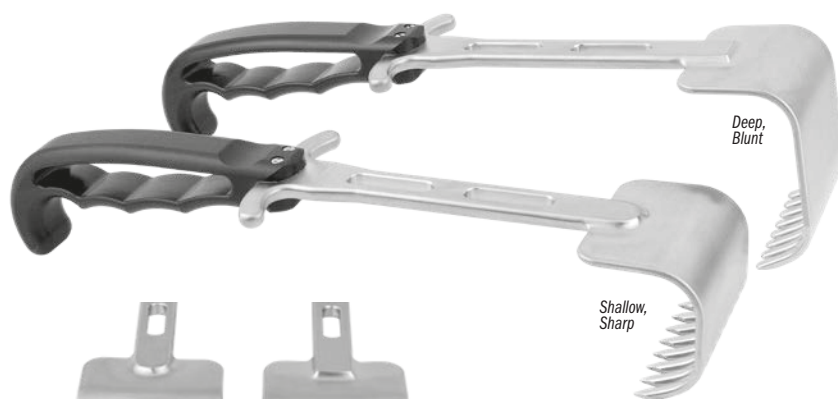

Sharp and dull teeth available in two depths




Flat Gelpi Retractors

Designed to help retract a broader area of soft tissue or muscle

The two largest sizes feature double ergonomic handles for increased comfort and control.

PRODUCT NO'S:	
4191 [Small]	Overall Length: 6.5" (16,5 cm) Prong Depth: 1.25" (3,2 cm)
4192 [Medium]	Overall Length: 7.25" (18,4 cm) Prong Depth: 1.75" (4,4 cm)
4193 [Large]	Overall Length: 9" (22,9 cm) Prong Depth: 3" (7,6 cm)
4194 [Deep]	Overall Length: 10" (24,4 cm) Prong Depth: 5" (12,7 cm)

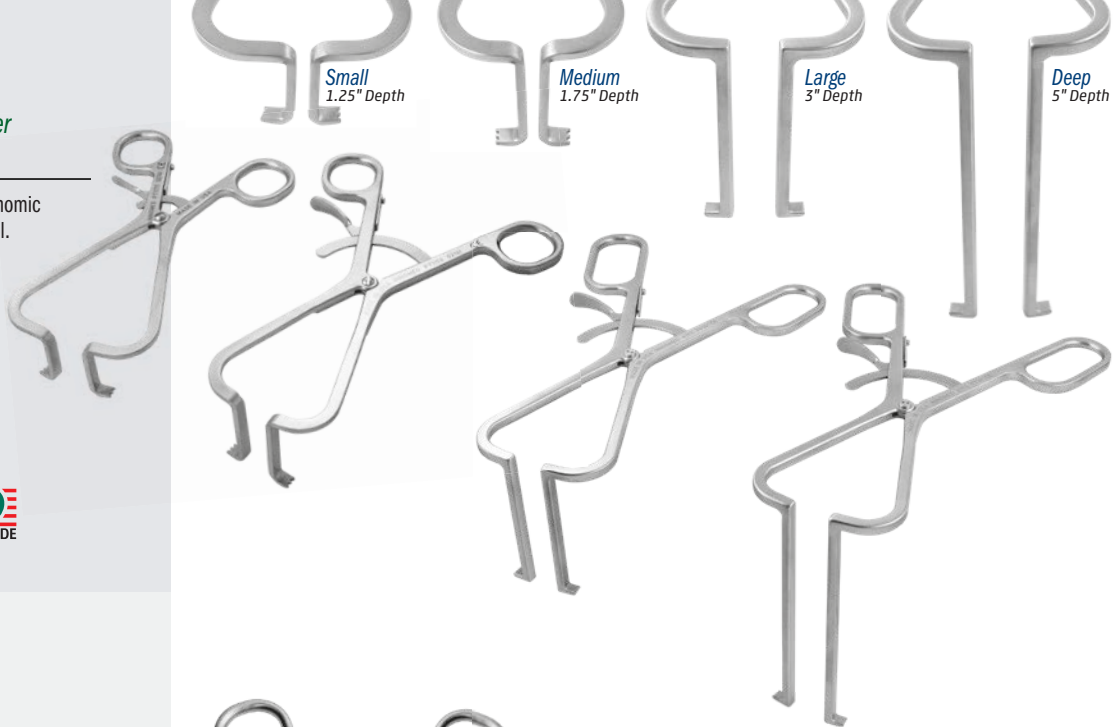

Gelpi Retractors

PRODUCT NO'S:	
4180 [Standard]	Overall Length: 7.5" (19,1 cm)
4181 [With Ergonomic Handle]	Overall Length: 7.5" (19,1 cm)



Delrin Insert Pliers

Designed to grasp an implant for adjustment without marring the implant surface

PRODUCT NO'S:	
2025	Overall Length: 8" (20,3 cm)
2025-03 [Replacement Insert]	Includes top and bottom delrin jaws, two screws and a hex wrench



Long Jaw Needle Nose Pliers

PRODUCT NO:	
1833	Overall Length: 7" (17,8 cm) Jaw Length: 2.25" (5,7 cm) Jaw Width Tapered from: 8 mm to 1.5 mm Jaw Height Tapered from: 12 mm to 2.5 mm





Zimmer Hall

Hudson

Large T-Handle Fixed Drivers

Large easy grip soft silicone handled drivers help provide a sturdy non-slip grip


The two standard Quick-connect models release by pulling the collar backward, while the Reverse Quick-connect model is designed to have the collar be pushed forward for release.

PRODUCT NO'S:

8248 [Zimmer Hall Quick-connect]
Overall Length: 5.75" (15,6 cm)
Handle Width: 4.625" (11,6 cm)

8248-01 [Reverse Quick-connect Zimmer Hall]
Overall Length: 5.75" (15,6 cm)
Handle Width: 4.625" (11,6 cm)

8249 [Hudson Quick-connect]
Overall Length: 6.75" (17,1 cm)
Overall Length with Pin In Handle: 11.5" (29,2 cm)

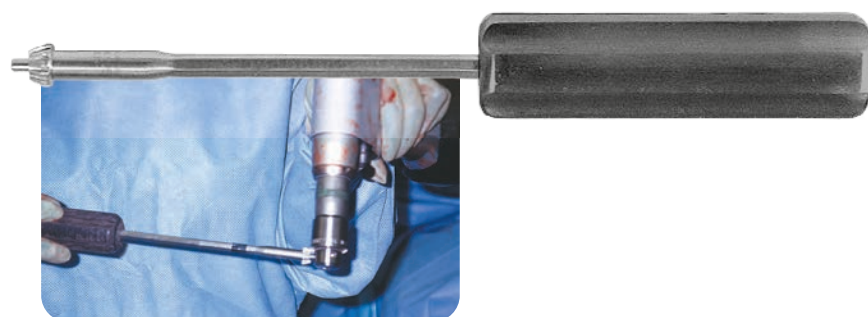

Large Handle Chuck Key

For easy tightening/untightening of a chuck

Allows a chuck to be tightened and untightened easily.

PRODUCT NO:

5517-01
Chuck Size: 1/4" (6,4 mm)
Overall Length: 10.5" (26,7 cm)
Handle Length: 4.5" (11,4 cm)



Straight Suture Passer

Designed to help pass suture through bone

PRODUCT NO:

1111
Overall Length: 8.125" (20,6 cm)
Handle Length: 4.25" (10,8 cm)
Shaft Diameter: 2,5 mm



Designed by Brian T. Maurer, MD



Aluminum Tapered Maul/Mallet

Large surface area allows the surgeon to focus on the action area of the instrument being struck, instead of making sure the mallet will strike the end of the instrument, much like a sculptors mallet

PRODUCT NO:

7828
Overall Length: 9.15" (23,2 cm)
Handle Length: 6" (15,2 cm)
End Diameter: 3" (7,6 mm)



Soft Impact Mallets with Easy Grip Handles

Provides shock-absorbing force

Designed to have a shock-absorbing force, providing less bounce or wasted force. The mallets are filled with a shock-absorbing media and have a flat striking surface to keep the mallet centered on an instrument. The mallet with delrin head features a replaceable delrin head.

PRODUCT NO'S:	
7820	[2 lbs. Standard] Weight: 2 lbs. (.907 kg) Overall Length: 10.5" (26,7 cm) Handle Length: 5" (12,7 cm) Head Width: 3.5" (8,9 cm) Head Diameter: 1.375" (3,5 cm)
7821	[2 lbs. With Weidman Handle] Weight: 2 lbs. (.907 kg) Overall Length: 10.625" (27 cm) Grip Length: 5.5" (14 cm) Head Width: 3.5" (8,9 cm) Head Diameter: 1.375" (3,5 cm)
7832	[2 lbs. With Delrin End] Weight: 2 lbs. (.907 kg) Overall Length: 10.5" (26,7 cm) Handle Length: 5" (12,7 cm) Head Width: 3.5" (8,9 cm) Head Diameter: 1.375" (3,5 cm)
7837	[3 lbs. Standard] Weight: 3 lbs. (1,35 kg) Overall Length: 11" (27,9 cm) Handle Length: 5" (12,7 cm) Head Width: 3.5" (8,9 cm) Head Diameter: 1.875" (4,8 cm)
Delrin Head Replacements for 7832:	
7832-HEAD01	[.5" Stud] Single
7832-HEAD02	[.5" Stud] 3-Pack
7832-HEAD03	[.875" Stud] Single
7832-HEAD04	[.875" Stud] 3-Pack



Soft Impact Mallet with Weidman Silicone Handle



Replaceable Delrin Head



Replacement Delrin Heads

Easy Grip Textured Soft Silicone Handle



Comfortable grip helps prevent the surgeon's gloved hand from slipping and helps maintain a solid grip.

Ortho Mallets with Easy Grip Handles

These solid stainless steel mallets each have a comfortable 4½" (11,4 cm) grip made of a textured silicone that helps prevent the surgeon's gloved hand from slipping and helps maintain a solid grip.

PRODUCT NO'S:	
7810	[Small] Overall Length: 8" (20,3 cm) Handle Length: 4.5" (11,4 cm) Head Weight: 1 lb. (.45 kg) Head Diameter: 1.3125" (33,3 mm)
7815	[Large] Overall Length: 8" (20,3 cm) Handle Length: 4.5" (11,4 cm) Head Weight: 1.75 lb. (.8 kg) Head Diameter: 1.5" (3,8 cm)



Jones Mallet

Unique hand fitting shape provides superior gripping strength for accurate light to heavy impaction

PRODUCT NO:	
7825	[2.4 lbs] Overall Length: 8.25" (21 cm) Head Width: 3" (7,6 cm) Head Diameter: 1.5" (3,8 cm)

Designed by Dickie Jones, MD





Ortho Impactors

PRODUCT NO'S:

Overall Length: 9" (22,9 cm)
Shaft Diameter: 9 mm

5331 [11 x 4 mm Rectangle]

5332 [12 x 7 mm Rectangle]


5333 [12 mm Tapered]

5334 [9 mm Square]


5335 [15 mm Round]

5336 [12 mm Round]

5337 [9 mm Round]



Diameter ends
at actual size
(closed forceps)



Universal Bone Grafting/ Impacting Forceps

*Bone graft can be grasped, placed & impacted
without changing hands or instruments*

Designed with grasping ends for delivery of bone graft. When the graft is in place, the forceps are closed, which forms the ends into an impacting punch. A striking platform forms the end of the forceps for tapping and tamping the graft. Four end diameters are available in two lengths.

PRODUCT NO'S:

Short: 6" (15,2 cm) Length

5010-01 1/8" (3,2 mm) Diameter End

5010-02 3/16" (4,8 mm) Diameter End

5010-03 1/4" (6,3 mm) Diameter End

5010-04 5/16" (8 mm) Diameter End

Long: 10" (25,4 cm) Length



5050-01 1/8" (3,2 mm) Diameter End

5050-02 3/16" (4,8 mm) Diameter End

5050-03 1/4" (6,3 mm) Diameter End

5050-04 5/16" (8 mm) Diameter End

Designed by J.A. Amis, MD

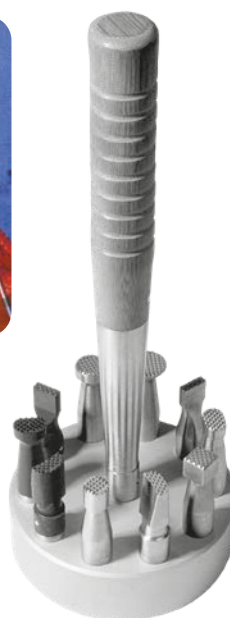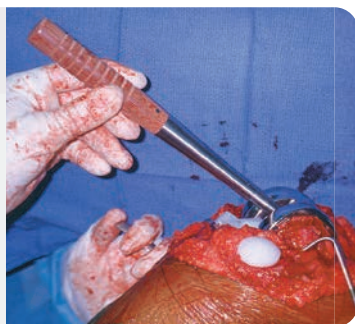

Modular Impactor Set

*Makes multiple impactor heads
easily visible and available*

Designed to have available to the operating surgeon multiple types of impactors utilizing one handle. The rack uses less space and allows the surgeon to quickly see the designs available. The impactors are supplied with stainless steel tips for bone and delrin tips which can be used against an implant for slight placement adjustments.

PRODUCT NO:

5370 [Complete Set]

Overall Handle Length: 8" (20,3 cm)

Grip Length: 4.5" (11,4 cm)

Impactor Head Lengths: 1.45" (3,7 cm)

Base Diameter: 3.5" (8,9 cm)



Cheng Biopsy Trepine System

Cannulated T-handle and trephines allow use of a standard 1.6 mm (.062") threaded K-wire to help facilitate grasping and removal of a core bone sample for biopsy or core decompression

Designed for use with a standard 1.6 mm (.062") threaded K-wire (not included).

- ▶ Allows use of trephine at oblique angles to bone surface by using an anchoring K-wire and cannulated trephine
- ▶ Avoids "skipping" of trephine teeth on bone surface
- ▶ Facilitates optimal approach angle and direction of trephine
- ▶ Variety of core diameters yields bone samples of sufficient size for pathology
- ▶ Adapters allow for use of a power drill
- ▶ Minimally invasive – soft tissue sleeve protects surrounding structures and tissue
- ▶ Can also be used for bone graft harvesting
- ▶ Repositioning guide allows easy adjustment of targeting K-wire

PRODUCT NO'S:

1425-00 [Complete Set with Case]

Set Includes/Available Separately:

1425-01 [Soft Tissue Protector – Small]

1425-02 [Soft Tissue Protector – Medium]

1425-03 [Soft Tissue Protector – Large]

1425-04 [Dilator – 4.75 mm]

1425-05 [Dilator – 6.25 mm]

1425-06 [Dilator – 7.75 mm]

1425-07 [Dilator – 9.25 mm]

1425-08 [Trephine – Small]

Internal Diameter: 5mm

Overall Length: 7.125" (18.1 cm)

1425-09 [Trephine – Medium]

Internal Diameter: 6.5 mm

Overall Length: 7.125" (18.1 cm)

1425-10 [Trephine – Large]

Internal Diameter: 8 mm

Overall Length: 7.125" (18.1 cm)

1425-11 [Drive End – Small]

1425-12 [Drive End – Medium]

1425-13 [Drive End – Large]

1425-14 [Driver Retraction Handle]

1425-14-B-COMP [Handle Retaining Screw]


1425-15 [3-Hole Wire Repositioning Guide]

1425-Case [Case]



K-wire not included.

Designed by Edward Cheng, MD

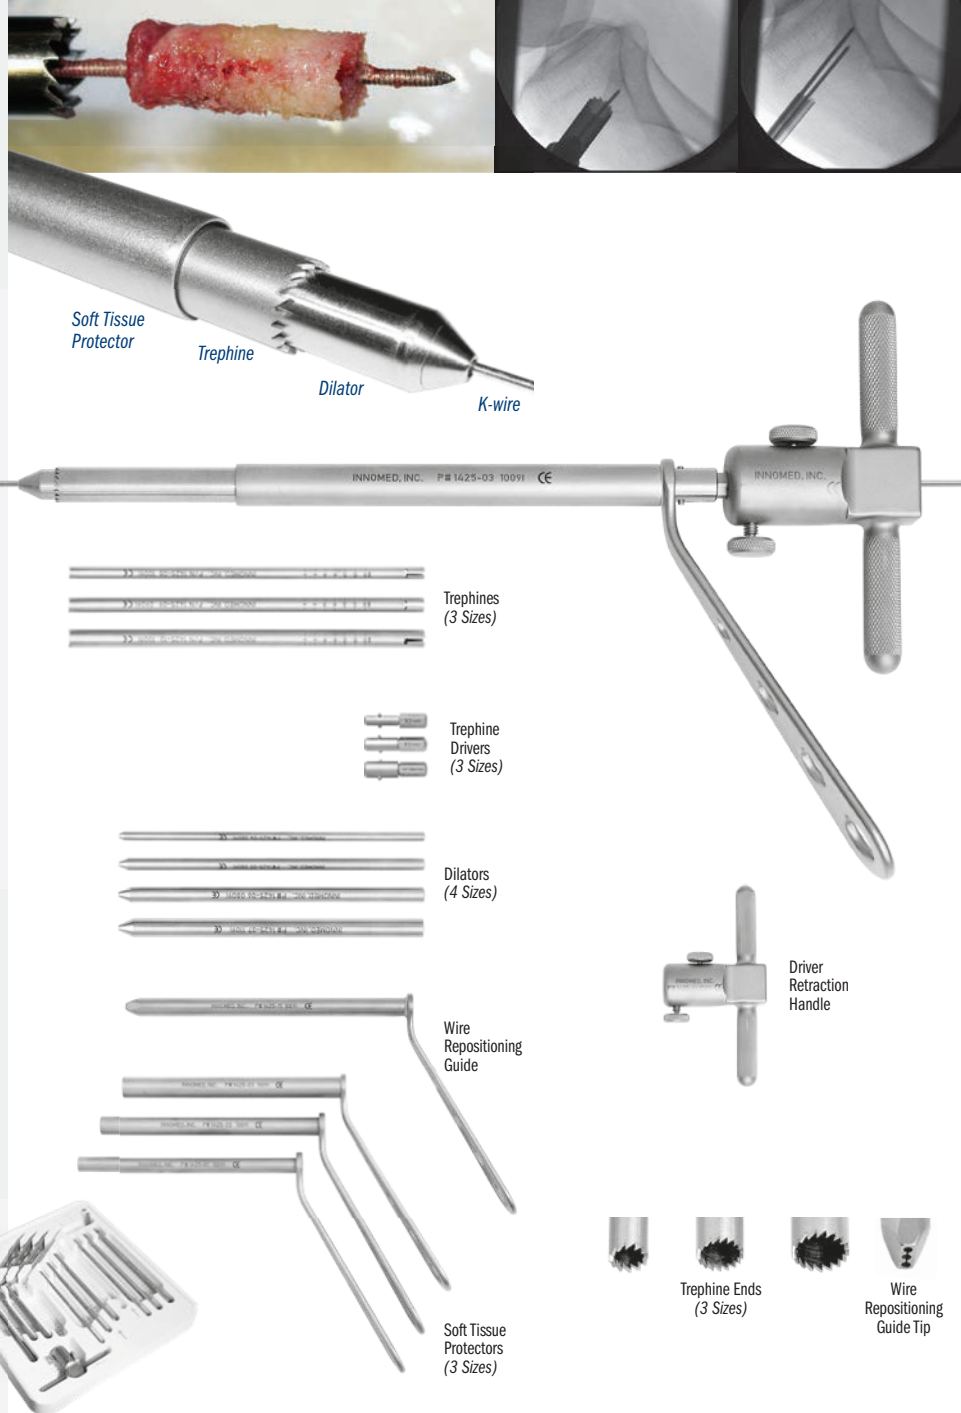

Mini-Ilexer Osteotomes

Helpful in osteophyte and cement removal

Small, thin osteotomes helpful in osteophyte and cement removal in total joint surgery. Larger handle helps with better control.

MADE FOR INNOMED IN GERMANY

PRODUCT NO'S:

5270-01 [4 mm]

Blade Width: 4 mm

Overall Length: 7.25" (18.4 cm)

Handle Length: 4" (10.2 cm)

5270-02 [6 mm]

Blade Width: 6 mm

Overall Length: 7.25" (18.4 cm)

Handle Length: 4" (10.2 cm)

5270-03 [10 mm]

Blade Width: 10 mm

Overall Length: 7.25" (18.4 cm)

Handle Length: 4" (10.2 cm)

5270-04 [12 mm]

Blade Width: 12 mm

Overall Length: 7.25" (18.4 cm)

Handle Length: 4" (10.2 cm)



INNOMED

Depth Gauge

Designed for one-handed use — helps to provide measurement of the depth/length of any bone hole for proper screw length determination

PRODUCT NO:
8015

 Overall Length: 7.625" (19,4 cm)
 Scale: From 0 to 48 mm


Mengato Depth Gauge

Ring-handled design with 3 rings gives 3-point grip for ease of holding and manipulation

Allows for superior gauge control and manipulation, to advance, engage and maintain the hook on the distal cortex by leveraging the probe against the bone hole and keeping gentle tension on the hook.


PRODUCT NO:
1139

 Overall Length - Contracted: 7.125" (18,1 cm)
 Overall Length - Extended: 9.125" (23,2 cm)
 Gauge: 0 to 50 mm


Designed by Richard Mengato, MD

US Patent # 8,512,349

New!

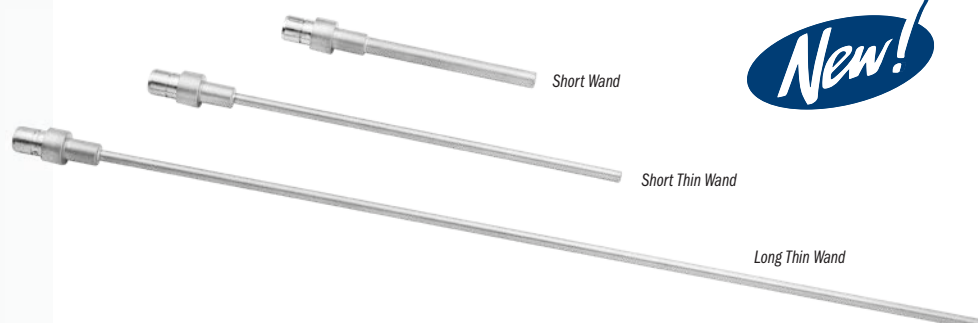

Disposable LED Light Source

PRODUCT NO'S:
PACKAGE OF 1:
8010-01 [Disposable LED Light Source]
 Overall Length: 2.5" (6,4 cm)
 Diameter: 1" (2,54 cm)

PACKAGE OF 10:
8010-10 [Disposable LED Light Source]


Light Wands – Short and Small Diameter

Short wand useful for proximal illumination, while thin diameter wands help illuminate deep cavities such as the femoral shaft

Light wands come with one (1) Disposable LED Light Source (#8010-01). Can also be attached to a fiber optic light cable with ACMI (female) connector.

PRODUCT NO:
8011-01-L [Short Light Wand]

 Short Wand with (1) Disposable LED Light Source #8010-01
 Wand Length: 3" (7,6 cm) / Wand Shaft Diameter: 4.6 mm

8011-02-L [Short Thin Light Wand]

 Short Thin Wand with (1) Disposable LED Light Source #8010-01
 Wand Length: 5.5" (14 cm) / Wand Shaft Diameter: 3.2 mm

8011-03-L [Long Thin Light Wand]


 Long Thin Wand with (1) Disposable LED Light Source #8010-01
 Wand Length: 11" (28 cm) / Wand Shaft Diameter: 3.2 mm

Designed by Anthony Unger, MD



LED Disposable Light Source and Reusable Light Wand Kit

Light wand designed for illumination of deep incisions — for use with the Innomed LED Disposable Light Source Only

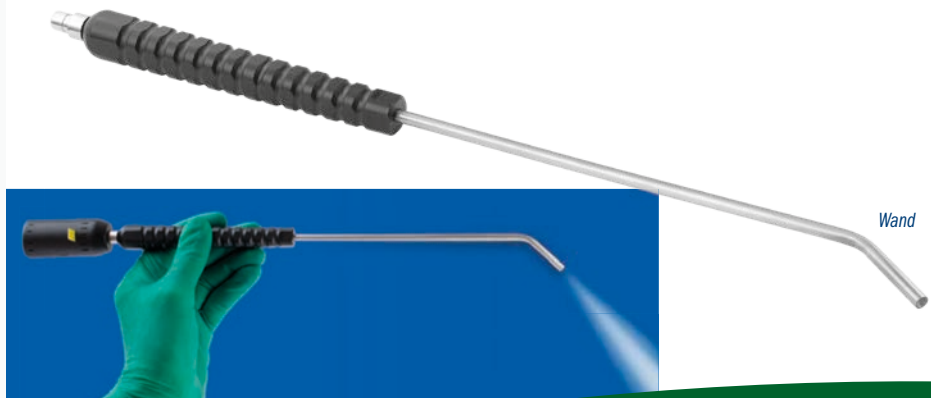PRODUCT NO:
8010-00 [Wand & One Light Source]


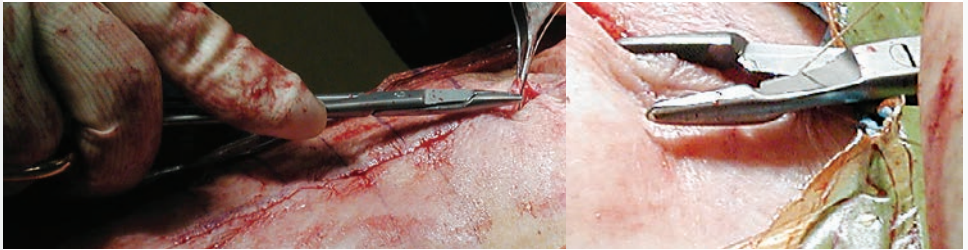
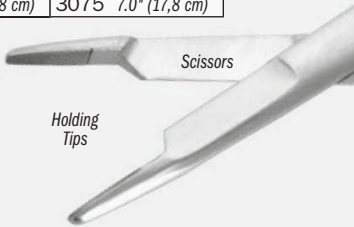
Orthopedic Needle Holder/Scissors

Drive a needle and cut a suture without changing instruments

Longer sizes are helpful in orthopedics.

PRODUCT NO'S:	
Standard Tips	Tungsten Carbide Tips
	3045 4.5" (11,4 cm)
3050 5.5" (14 cm)	3055 5.5" (14 cm)
3060 6.5" (16,5 cm)	3065 6.5" (16,5 cm)
3070 7.0" (17,8 cm)	3075 7.0" (17,8 cm)

MADE FOR INNOMED IN GERMANY



Rogozinski Locking Needle Driver/Scissors

Designed with a quick lock & release handle, can drive a needle and cut a suture without changing instruments

PRODUCT NO'S:		Designed by Chaim Rogozinski, MD
3083 [Standard]	3084 [Large]	
Overall Length: 6.5" (16,5 cm)	Overall Length: 7.75" (19,7 cm)	

MADE EXCLUSIVELY FOR INNOMED IN GERMANY



Sweed Dissecting Scissors

Designed with a blunt, flat bar fixed to the lower limb, the scissors also act as a dissector to protect underlying vital structures

PRODUCT NO:	Designed by Tamer Sweed, FRCS (Orth)
3081	
Overall Length: 6.625" (16,8 cm)	
Bottom Pad: 16 mm x 6 mm	
Pad Extension Beyond Scissor: 6 mm	

MADE EXCLUSIVELY FOR INNOMED IN GERMANY





Adson Forceps with Cobb Elevator End

Has the advantages of having a Cobb tip at the end of an Adson forceps

Allows the opportunity to do soft tissue dissection, cleaning of the bone or bone fragments in a fracture, push bone fragments to hold a reduction in a fracture, separate soft tissue, and turn it around to pick up tissue without having to switch instruments back and forth.

PRODUCT NO:

1166

Overall Length: 4.75" (12,1 cm)
Tip Width: 2.4 mm (2,4 mm)

Designed by Oscar Castro-Aragon, MD

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY



Charnley Type Tissue Needle Forceps

Helpful for wound closure in deep areas with fascia under tension such as hip or knee replacement

Can also help retrieve a needle in a tight area.

PRODUCT NO:

1165

Overall Length: 6.875" (17,5 cm)

Designed by Amal Das Jr., MD

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY



Long Bonney Tissue Forceps

Extra length—3" more than standard—allows for use in deep wound areas

PRODUCT NO:

5040

Overall Length: 10" (25,4 cm)

MADE EXCLUSIVELY
FOR INNOMED IN
GERMANY





Stanton Needle Driver

Allows a heavy cutting needle such as an OS-6 to be pushed through cancellous bone when re-attaching muscle or tendon


The groove captures the outer (convex) side of the needle and prevents the needle from spinning even when applying significant pressure. Useful for reattaching the rotator cuff in rotator cuff repairs, as well as in attaching suture anchors.

PRODUCT NO:

3042

Overall Length: 6.75 (17,1 cm)
Jaw Width: .25" (6,3 mm)

Designed by John L. Stanton, MD, FACS



Bates Needle Holder with Suture Cutter

By trapping the suture and cutting when the forcep is opened, helps to reduce stress on the surgeon's hand


- ▶ No switching between needle driver and scissors, or need for assistant to cut sutures for you
- ▶ Cutting with opening of forceps reduces possibility of damage to surrounding tissues
- ▶ Sliding the instrument down to the suture knot allows quick and consistent 2 mm suture tails
- ▶ Slip the suture strands into the suture cutting slot and slide the closed instrument along until desired length of tail is achieved, then open the instrument to cut the sutures

PRODUCT NO:

3071



Overall Length: 8.125" (20,6 cm)
Jaw Width: .25" (6,4 mm)
Open Jaw Length: .5" (12,8 mm)

Designed by James E. Bates, MD



Suture Cutter

Needle Holder

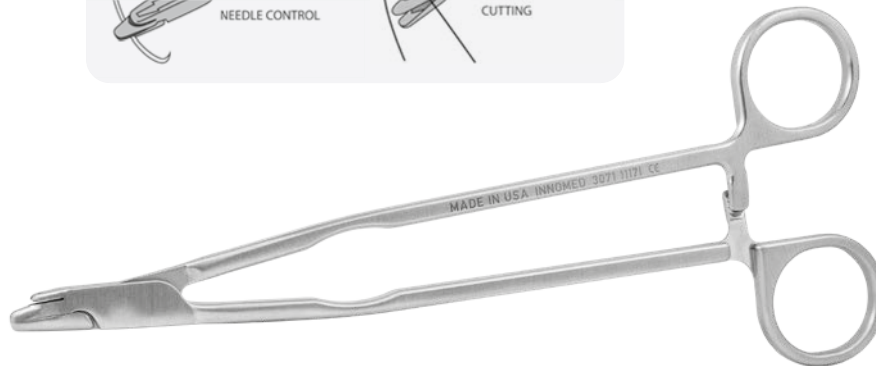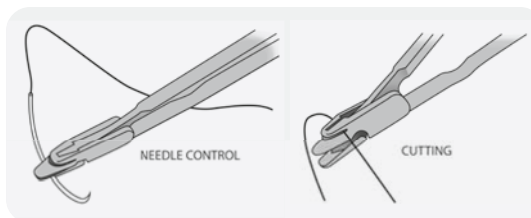

Ring Curettes

PRODUCT NO'S:

Straight Shaft
Overall Length: 8.75" (22,2 cm)

5150 [3 mm, Straight]
Ring Diameter: 3 mm

5152 [6 mm, Straight]
Ring Diameter: 6 mm

5154 [8 mm, Straight]
Ring Diameter: 8 mm

Bent Shaft
Overall Length: 8.75" (22,2 cm)

5156 [3 mm, Bent]
Ring Diameter: 3 mm

5157 [6 mm, Bent]
Ring Diameter: 6 mm

5158 [8 mm, Bent]
Ring Diameter: 8 mm

MADE FOR INNOMED IN GERMANY





Stulberg Incision Close Gelpi & Blade Set

Designed to help expose difficult to visualize areas at the end of incisions

PRODUCT NO'S:

4269-00 [Set – 1 Gelpi & 1 Blade]

Also available Individually:

4269-01 [Gelpi]

Overall Length: 7.25" (18,4 cm)

Maximum Spread Width: 3.5" (8,9 cm)

4269-02 [Blade]

Overall Length: 5.5" (14 cm)

Blade Width: 1" (2,54 cm)

Blade Bend-Back Angle: 130°

Designed by S. David Stulberg, MD



GENERAL USE



Incision Aligner

Designed to align an incision during closing

The bent ends of the aligner are placed at each end of an incision, which is aligned by pulling outward on each end. The sliding end will lock in place when it is tensioned. Pressing inward slightly on the sliding end will allow the aligner to be collapsed and removed.

PRODUCT NO:

1330

Overall Length: 14" (35,6 cm)

Blade Offset: 45 mm



Dodson Extremity Skin Saver

Designed to help protect the patient's skin when removing a disposable tourniquet

PRODUCT NO:


8628

Overall Length: 4.75" (12,1 cm)

Width: 1.5" (3,8 cm)

Lip: .5" (1,3 cm)

Designed by Mark A. Dodson, MD

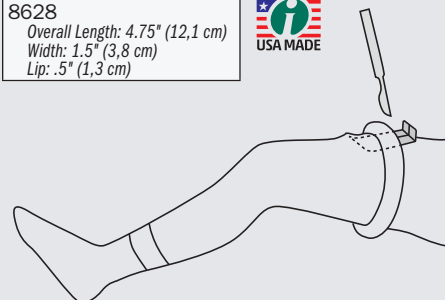

GENERAL USE

Cobb Elevators

Two Sizes Available With or Without Teeth

Ultra hard titanium nitride coating helps to extend blade life by increasing surface hardness, prolonging sharpness, and resisting chemicals and corrosion.

PRODUCT NO'S:	
WITH TEETH	
3432	[1/2" with Teeth] Overall Length: 11" (27,9 cm) Blade Width: 1/2" (13 mm)
3434	[1" with Teeth] Overall Length: 11" (27,9 cm) Blade Width: 1" (25,4 mm)
WITHOUT TEETH	
3436	[1/2" without Teeth] Overall Length: 11" (27,9 cm) Blade Width: 1/2" (13 mm)
3438	[1" without Teeth] Overall Length: 11" (27,9 cm) Blade Width: 1" (25,4 mm)



Bradley Periosteal Elevator

PRODUCT NO'S:	
4719	[1/2"] Overall Length: 11" (27,9 cm) Blade Width: .5" (13 mm)
4720	[3/4"] Overall Length: 11" (27,9 cm) Blade Width: .75" (19 mm)

Designed by Gary W. Bradley, MD



Periosteal Elevator

Designed for better control

Designed with a curved end for easier use, and sharper sides for ease of elevating and stripping. The handle is designed for better control.

PRODUCT NO'S:	
3450	[Curved] Overall Length: 7.5" (19,1 cm) Handle Length: 4.5" (11,4 cm) Blade Size: 16 x 13 mm
3455	[Straight] Overall Length: 7.75" (19,7 cm) Handle Length: 4.5" (11,4 cm) Blade Size: 19 x 14 mm



Gelbke Cobb Elevator with Suction

Designed to be used during exposure of the posterior spine, as well as for pelvic and acetabular trauma cases

PRODUCT NO:

3433

Overall Length: 12.75" (32,4 cm)

Cobb End Width: 18 mm (.7")

Shaft plus Head Length: 5.5" (15 cm)



Designed by Martin K. Gelbke, MD

Lighted Yankaur Suction Device

Designed to help provide effective suction with the addition of a light source for enhanced visualization

- ▶ Device comes with one (1) Disposable LED Light Source (#8010-01)
- ▶ Can also be attached to a fiber optic light cable with ACMI (female) connector
- ▶ The handle is made of Delrin
- ▶ Entire device is steam sterilizable

PRODUCT NO'S:

8016-L-01


Overall Length: 11.75" (29,8 cm)

Handle Length: 3.93" (10 cm)

Handle Width: .86" (2,2 cm)

Suction Tube Diameter: .25" (6,35 mm)

Designed by
Adolph V. Lombardi Jr., MD

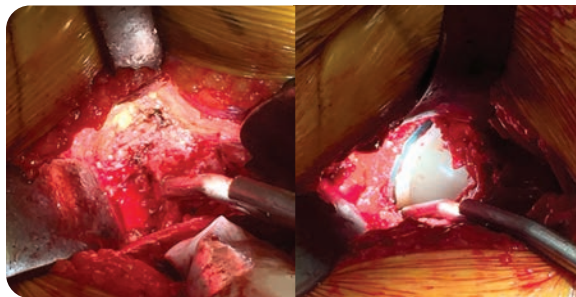

Beicker Curette Suction Device

Designed to help visualization of a fracture site within a fracture hematoma

Also useful for arthroscopic curettage of osteochondral lesions.

PRODUCT NO:

4231

Overall Length: 10.5" (26,7 cm)

Curette Cup: 7.5 mm x 5.5 mm

Designed by Clint Beicker, MD



Ortho Suction Tube

Very effective for suction and minor retracting

Helps eliminate plugging due to bone, cement fragments, blood clots, etc.

PRODUCT NO:

5465

Overall Length: 9.25" (23,5 cm)

End Hole Dia.: 1 mm

Side Hole Dia.: 1.5 mm

Designed by T. Eickmann, MD



White Aspiration Handle

Designed for aspiration of cavities or spaces that have greater than 20 ml volume, such as joints, bone marrow, and the iliac crest

Works with a 60 ml syringe only. Syringe not included.


PRODUCT NO:

1131

Height: 5" (12,7 cm)
Length: 6.5" (16,5 cm) / Extends to 11" (27,9 cm)
Width at Syringe Holder: 1.5" (3,8 cm)
Body Width: .9" (2,3 cm)



Designed by Edward White, MD

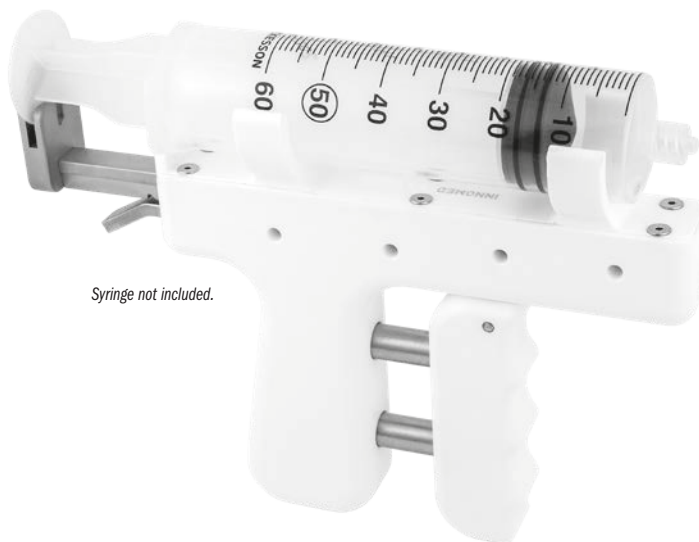

Syringe not included.

Gray Syringe Assist with Ergonomic Handle

Designed by Robert Gray, MD

For use in the O.R or the office, the design helps to prevent hand fatigue and pain when injecting with a 20mL syringe over multiple cases

- Sterilizable for O.R use, such as injecting the posterior capsule during TKA
- Especially useful for injecting preoperative local anesthesia for WALANT surgery
- Uses finger flexors to generate more force over more surface area than only the thumb flexor
- Ratchet mechanism ensures maximal grip force generation throughout entire injection

Syringe not included.


PRODUCT NO:

8988

Overall Length - Closed: 5.25" (13,3 cm)
Overall Length - Open: 7.5" (19,1 cm)
Height: 5" (12,7 cm)
Syringe Diameter: 21 mm



Patent Pending

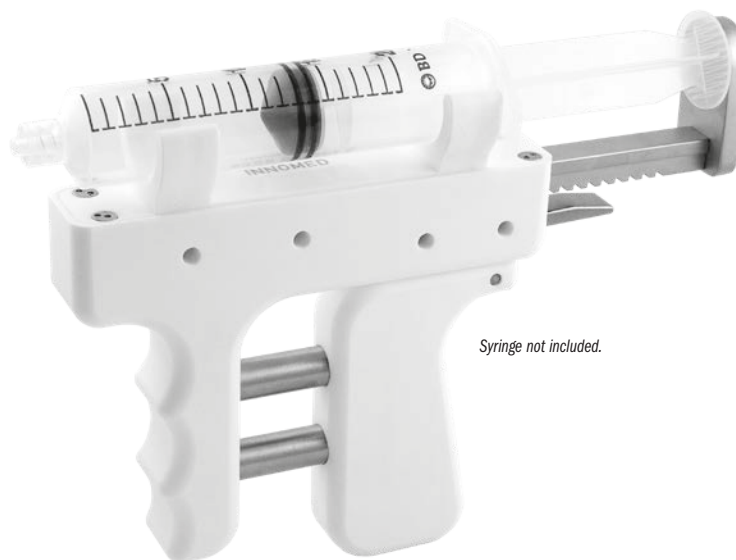

Syringe not included.

Radiation Attenuating Surgical Gloves

Powder-free gloves provide increased protection from direct x-ray beam and scattered radiation

Reduced Exposure

Lead-free, surgical gloves attenuate direct or scattered rays and are an environmentally friendly alternative to leaded gloves.

Freedom of Movement

Gloves are very thin—ONLY 0.007" THICK—to allow the greatest possible flexibility, dexterity, and sensitivity of touch while decreasing finger fatigue.

Natural Latex Free

& Powder-Free

Reduced risk of natural rubber latex allergies.

Quality Guaranteed

All gloves are 100% tested for pin holes and leaks.

Applications

Fluoroscopy, Orthopedics, Radioisotope Handling, Cardiology, Radiology, Dental, Nuclear Medicine

Protect your hands!



Suitable for reducing harmful radiation exposure during any procedure requiring the use of fluoroscopy

Average Radiation Attenuation Levels Measured in the Direct Beam

Beam Quality	Aluminum Half Value Layer	Measured Attenuation
60 kVp	HVL = 2.3 mm	58.7%
80 kVp	HVL = 3.3 mm	49.9%
100 kVp	HVL = 4.3 mm	44.6%
120 kVp	HVL = 5.6 mm	40.6%

NOTE: Double gloving with conventional latex surgical gloves provides only 1% attenuation.
Levels are measured by a fixed filter equivalent: 2.5 mm Al

PRODUCT NO'S:

5 PAIRS/PACK	25 PAIRS/PACK
7510-01 7.0	7510-02 7.0
7515-01 7.5	7515-02 7.5
7520-01 8.0	7520-02 8.0
7525-01 8.5	7525-02 8.5
7530-01 9.0	7530-02 9.0



FREE TRIAL ON MOST INSTRUMENTS

INSTRUMENT EVALUATION POLICY

All instruments are available for a no-charge 2-week evaluation (excluding extraction instruments—which are available to rent. There is a pad replacement charge with all Hip Positioners.

INSTRUMENT RENTAL

All Innomed, Inc. implant extraction instruments are available for rental on a per-case basis. Please call for more information.

INNOMED WARRANTY

One year for defective merchandise. Our instruments are designed for a specific purpose and should be used accordingly. Warranty is void if instrument has not been maintained properly or used for its intended purpose.



Innomed, Inc.

103 Estus Drive
Savannah, GA 31404

Toll Free (US ONLY)

1.800.548.2362

Tel 912.236.0000
Fax 912.236.7766

WWW.INNOMED.NET
info@innomed.net



Innomed-Europe LLC

Alte Steinhäuserstrasse 19
CH-6330 Cham
Switzerland

Tel 0041 (0) 41 740 67 74
Fax 0041 (0) 41 740 67 71

WWW.INNOMED-EUROPE.COM

info@innomed-europe.com

Innomed-Europe GmbH

c/o Emons Logistic GmbH
In Rammelswiesen 9
D-78056 Villingen-Schwenningen
Deutschland

Tel 0049 (0) 7720 46110 60
Fax 0049 (0) 7720 46110 61

France

contact.france@innomed-europe.com

ISO 13485:2016

©2020 Innomed, Inc., All Rights Reserved

2020 Complete Catalog